

“Stay Connected” with



Liquid Tight Cordgrips

a PennEngineering® Company



**NO O-RING
REQUIRED!**

Heyco®-Tite Liquid Tight Cordgrips

Pigtail™, Metric Hubs with Integral Sealing Ring

The Ultimate in Liquid Tight Strain Relief Protection



- Flexible Pigtail extender prevents sharp bends and extends cable life.
- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters.
- IP 68 rated.
- Approved for **NEMA 4, 4X, 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to .705" (17,9 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Unassembled Nylon Locknuts INCLUDED.**
- For Heyco Liquid Tight Threaded Plugs, see page 3-51.
- Consult Heyco for cordgrips molded in other colors.

CABLE DIA. RANGE				PART NO.		DESCRIPTION	UL or RA	PART DIMENSIONS							
Minimum		Maximum		Including Nylon Nut* Black	No Nut Black ††			A Clearance Hole Dia.	B Max. O.A. Length	C Thread Length		E Wrenching Nut Flats			
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.		
.065	1,7	.210	5,3	M4396	M4422	Flex RLTCG M12	RA	.473	12,0	2,44	62,0	.32	8,1	.63	16,0
.115	2,9	.250	6,4	M4398	M4424	Flex LTCG M12									
.065	1,7	.230	5,8	M4400	M4426	Flex RLTCG M16	RA	.630	16,0	2,77	70,4	.32	8,1	.82	20,8
.105	2,7	.315	8,0	M4402	M4428	Flex LTCG M16									
.095	2,4	.290	7,4	M4404	M4430	Flex RLTCG M20	UL	.787	20,0	3,89	98,8	.41	10,4	.98	24,9
.170	4,3	.450	11,4	M4406	M4432	Flex LTCG M20									
.260	6,6	.545	13,8	M3270	-	Flex LTCG LL M20	UL	.787	20,0	4,34	110,2	.41	10,4	1,06	26,9
.250	6,4	.490	12,4	M4408	M4434	Flex RLTCG M25	UL	.985	25,0	5,04	128,0	.52	13,2	1,30	33,0
.435	11,1	.705	17,9	M4410	M4436	Flex LTCG M25									

Standard color black.

*Nylon locknuts shipped unassembled

††For No Nut Part Nos. in gray color please visit our Cordgrip product section at heyco.com

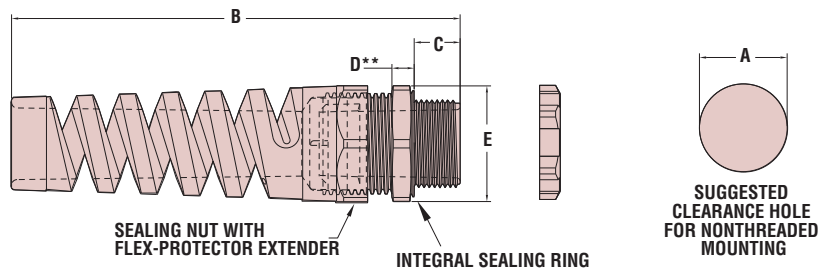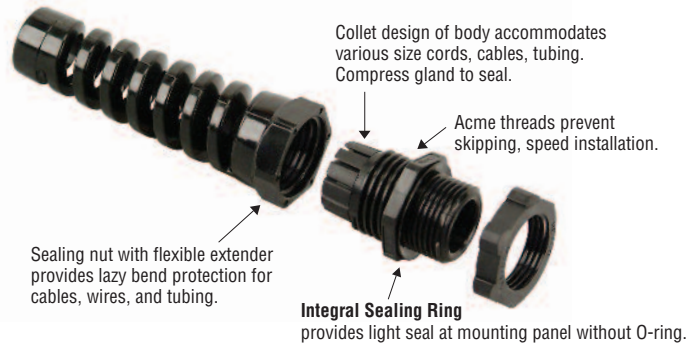

**Consult Heyco for Wrenching Nut Thickness "D"

*Quick
Specs*

Material	Nylon 6/6 w/Buna N or TPE Sealing Gland
Certifications	<ul style="list-style-type: none"> UL Listed under Underwriters' Laboratories File E51579 RA Recognized under Components Program of Underwriters' Laboratories File E51579 SF Certified by Canadian Standards Association File 93876C Approved for NEMA 4, 4X, 6 and 6P Applications VDE Marks License #40010390 CE Per CE Low Voltage Directive 73/23/EEC
Flammability Rating	94V-2
Temperature Range	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Glands, Strain Reliefs & Cord Grips](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[1218](#) [1300980012](#) [1300980105](#) [DBZM-6828](#) [1498](#) [915](#) [300623](#) [5632NM](#) [1124](#) [1151](#) [561-MP6P4WH](#) [5534M](#) [9000005073](#) [52104486](#)
[5315817](#) [N16 025 0112 1](#) [N16 020 0112 1](#) [M6106](#) [7422](#) [NG-9516 Gasket](#) [N16 016 0112 1](#) [NG-9514 Gasket](#) [52006151](#) [2704](#) [BM4940L](#)
[BM4950L](#) [1.097.2012.50](#) [1.152.1300.01](#) [1.152.2000.50](#) [1.152.2100.01](#) [1.152.2500.50](#) [1.152.4000.50](#) [1.209.1218.70](#) [1.209.2100.15](#)
[1.209.6400.71](#) [1.609.1100.01](#) [1.609.2900.15](#) [1.609.3200.52](#) [1.609.3600.15](#) [1.609.5000.51](#) [1.609.6300.50](#) [1.676.2500.50](#) [52103150](#) [53112705](#)
[53112715](#) [53112735](#) [53119073](#) [54115405](#) [52004120](#) [52001894](#)