



**NO O-RING
REQUIRED!**

Heyco® -Tite Liquid Tight Cordgrips


Straight-Thru, PG Hubs with Integral Sealing Ring

The Ultimate in Liquid Tight Strain Relief Protection

- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable diameters.
- IP 68 rated.
- Approved for **NEMA 6 and 6P** applications.
- Ratchet design of sealing nut assembly provides superior anti-vibration protection and ensures a firm grip on the cable.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with Buna N or TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- Multiple sizes for flexible cord diameters ranging from .065" (1,7 mm) to 1.560" (39,6 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Unassembled Nylon Locknuts INCLUDED.**
- For Heyco Liquid Tight Threaded Plugs, see page 3-43.
- Consult Heyco for cordgrips molded in other colors.

CABLE DIA. RANGE				PART NO.		DESC.	UL or RA	PART DIMENSIONS										
Minimum		Maximum		Black	Gray			A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thk.		E Wrenching Nut Flat Size		
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.		
.065	1,7	.210	5,3	M3444	M3445	RLTCG 7	RA	.492	12,5	1.16	29,5	.32	8,1	.21	5,3	.63	16,0	
.115	2,9	.250	6,4	M3207	M3208	LTCG 7												
.065	1,7	.230	5,8	M3446	M3447	RLTCG 9	RA	.599	15,2	1.25	31,8	.32	8,1	.21	5,3	.83	21,0	
.105	2,7	.315	8,0	M3210	M3211	LTCG 9												
.069	1,8	.260	6,6	M3448	M3449	RLTCG 11	RA	.733	18,6	1.48	37,6	.38	9,7					
NEW!	.230	5,8	4,00	10,2	M3213ST	-		LTCG 11 ST	.733	18,6	1.41	35,8	.31*	7,9	.21	5,3	.94	23,9
					M3213	M3214	LTCG 11	RA	.733	18,6	1.48	37,6	.38	9,7				
.095	2,4	.290	7,4	M4500	M4501	RLTCG 13.5	UL	.804	20,4	1.53	38,9	.41	10,4	.21	5,3	.98	24,9	
.170	4,3	.450	11,4	M3216	M3217	LTCG 13.5												
.180	4,6	.400	10,2	M4502	M4503	RLTCG 16	UL	.886	22,5	1.68	42,7	.44	11,2	.25	6,4	1.06	27,0	
.260	6,6	.545	13,8	M3219	M3220	LTCG 16												
.250	6,4	.490	12,4	M3454ST	M3455ST	RLTCG 21 ST	UL	1.115	28,3	1.80	45,7	.43**	10,9	.25	6,4	1.30	33,0	
.435	11,0	.705	17,9	M3222ST	M3223ST	LTCG 21 ST												
.250	6,4	.490	12,4	M3454	M3455	RLTCG 21	UL	1.115	28,3	1.89	48,0	.52	13,2	.25	6,4	1.30	33,0	
.435	11,0	.705	17,9	M3222	M3223	LTCG 21												
.490	12,4	.785	19,9	M4504	M4505	RLTCG 29	UL	1.470	37,3	2.23	56,6	.58	14,7	.30	7,6	1.73	43,9	
.590	15,0	1.000	25,4	M3225	M3226	LTCG 29												
.787	20,0	1.020	26,0	M3206	M3205	RLTCG 36	UL	1.875	47,6	2.39	60,7	.47	11,9	.31	7,9	2.05	52,7	
.875	22,2	1.260	32,0	M3204	M3203	LTCG 36												
1.000	25,4	1.240	31,5	M3218	M3215	RLTCG 42	UL	2.130	54,1	2.50	63,5	.48	12,2	.36	9,1	2.50	63,5	
1.230	31,2	1.560	39,6	M3212	M3209	LTCG 42												
1.160	29,5	1.350	34,3	M3283	M3284	RLTCG 48	UL	2.340	59,4	2.63	66,7	.50	12,7	.42	10,7	2.75	69,9	
1.450	36,8	1.560	39,6	M3281	M3282	LTCG 48												

Standard colors black and gray.
 * .31" (7,9 mm) Shorty LTCG Thread Length.
 ** .43" (10,9 mm) Shorty LTCG Thread Length.

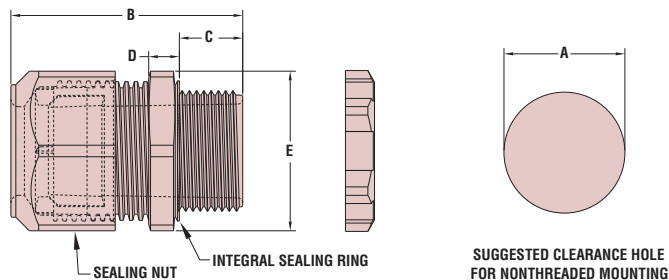

Material	Nylon 6/6 w/Buna N or TPE Sealing Gland
Certifications	<ul style="list-style-type: none"> UL Listed under Underwriters' Laboratories' File E51579 RA Recognized under the Component Program of Underwriters' Laboratories' File E51579 SR Certified by Canadian Standard Association File 93876C
Flammability Rating	94V-2
Temperature Rating	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR)

Quick Specs

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Glands, Strain Reliefs & Cord Grips](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[1218](#) [1300980012](#) [1300980105](#) [DBZM-6828](#) [1498](#) [915](#) [300623](#) [5632NM](#) [1124](#) [1151](#) [561-MP6P4WH](#) [5534M](#) [9000005073](#) [52104486](#)
[5315817](#) [N16 025 0112 1](#) [N16 020 0112 1](#) [M6106](#) [7422](#) [NG-9516 Gasket](#) [N16 016 0112 1](#) [NG-9514 Gasket](#) [52006151](#) [2704](#) [1.097.2012.50](#)
[1.152.1300.01](#) [1.152.2000.50](#) [1.152.2100.01](#) [1.152.4000.50](#) [1.209.1218.70](#) [1.209.2100.15](#) [1.209.6400.71](#) [1.609.1100.01](#) [1.609.2900.15](#)
[1.609.3200.52](#) [1.609.5000.51](#) [1.609.6300.50](#) [1.676.2500.50](#) [53112705](#) [53112715](#) [53112735](#) [53119073](#) [54115405](#) [52004120](#) [52001894](#)
[53018160](#) [APGPG36BA](#) [1300990004](#) [1.033.0913.01](#) [1.033.1116.01](#)