

“Stay Connected” with



Liquid Tight Cordgrips

a PennEngineering® Company



## HEYbrid™ Aluminum Liquid Tight Cordgrips

### Straight-Thru, NPT Hubs

Don't get SKU'ed: More Cable Range, Fewer SKU's!

Genetically engineered to destroy your inventory monster!

*The Ultimate in Liquid Tight Strain Relief Protection*



CABLE DIA. RANGE				PART NO.	DESCRIPTION	UL or RA	PART DIMENSIONS									
Minimum		Maximum					Machined Aluminum	A		B		C		D		E
in.	mm.	in.	mm.		Clearance Hole Dia.	Max. O.A. Length		Thread Length	Thread Length	Thread Length	Thickness	Wrenching Nut Flat Size	Thickness	Wrenching Nut Flat Size	Thickness	Wrenching Nut Flat Size
					in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
<b>HEYCo-molded Finger/Gland</b>																
.065	1,7	.210	5,3	<b>M6100</b>	RALCG 1/4	cULus	.540	13,7	1.29	32,8	.40	13,2	.20	5,1	.75	19,1
.115	2,9	.250	6,4	<b>M6101</b>	ALCG 1/4											
.065	1,7	.230	5,8	<b>M6102</b>	RALCG 3/8	cULus	.680	17,3	1.39	35,3	.41	10,4	.20	5,1	.88	22,4
.105	2,7	.315	8,0	<b>M6103</b>	ALCG 3/8											
.095	2,4	.290	7,4	<b>M6106</b>	RALCG 1/2	cULus	.875	22,2	1.69	42,9	.53	13,5	.20	5,1	1.06	26,9
.170	4,3	.450	11,4	<b>M6107</b>	ALCG 1/2											
.180	4,6	.400	10,1	<b>M6108</b>	RALCG LL 1/2	cULus	.875	22,2	1.81	46,0	.53	13,5	.20	5,1	1.25	31,8
.260	6,6	.545	13,8	<b>M6109</b>	ALCG LL 1/2											
.250	6,4	.490	12,4	<b>M6110</b>	RALCG 3/4	cULus	1.109	28,2	1.93	49,0	.55	14,0	.20	5,1	1.31	33,3
.435	11,0	.705	17,9	<b>M6111</b>	ALCG 3/4											
.490	12,4	.785	19,9	<b>M6112</b>	RALCG 1	cULus	1.375	34,9	2.29	58,1	.69	17,5	.20	5,1	1.75	44,5
.590	15,0	1.000	25,4	<b>M6113</b>	ALCG 1											
<b>Discrete Finger &amp; Gland</b>																
.787	20,0	1.02	26,0	<b>M6115</b>	RALCG 1-1/4	cULus	1.734	44,0	2.56	65,0	.71	18,0	.25	6,4	2.25	57,2
.865	22,0	1.26	32,0	<b>M6116</b>	ALCG 1-1/4											
1.00	25,4	1.24	31,5	<b>M6117</b>	RALCG 1-1/2	cULus	1.984	50,4	2.69	67,1	.73	18,5	.25	6,4	2.50	63,5
1.23	31,2	1.56	39,6	<b>M6118</b>	ALCG 1-1/2											
1.16	29,5	1.35	34,3	<b>M6119</b>	RALCG 2	cULus	2.469	62,7	2.92	74,2	.76	19,3	.25	6,4	2.75	69,9
1.45	36,8	1.73	44,0	<b>M6120</b>	ALCG 2											

Assembled O-ring **INCLUDED**.

Locknut not included - see page 3-48 for Metal Locknuts

- HEYCo-molded gripping finger/gland technology accommodates the **widest cable range** over the **fewest sku's**.
- Rolled grease-free threads **prevent galling** and allow for multiple assemblies and disassemblies. No messy, unsightly thread lubrication required.
- Approved for **NEMA 4, 4X, 6 and 6P**.
- Self-retaining sealing rings eliminate the need for an O-Ring groove, thus **reducing cost**.
- **Aluminum construction** provides excellent durability and performance for most **industrial applications**.
- For use in both indoor and outdoor applications to prevent cable pull-out, control arc of bend, and to provide a tight seal against environmental elements such as dirt, moisture, and coolants.
- Sealing washer required for through hole applications only.
- DFARS Compliant

### The HEYCo-molded Finger, Gland & Seat

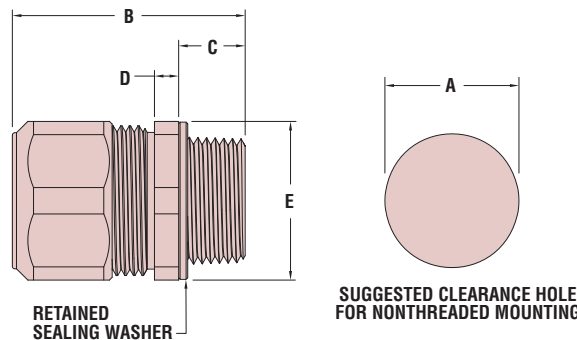

Material	6061 Aluminum Body and sealing nut with nylon 6/6 and TPE co-molded finger/gland assembly SBR Sealing Washer
Certifications	cULus Listed under Underwriters' Laboratories File E51579 to both Canadian and U.S. requirements cRAus Recognized under Underwriters' Laboratories File E51579 to both Canadian and U.S. requirements
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)
IP Rating	IP68 (70 PSI, 5 BAR)

Quick Specs

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cable Glands, Strain Reliefs & Cord Grips](#) category:*

*Click to view products by [Heyco](#) manufacturer:*

Other Similar products are found below :

[1218](#) [1300980012](#) [1300980105](#) [DBZM-6828](#) [1498](#) [915](#) [300623](#) [5632NM](#) [1124](#) [1151](#) [561-MP6P4WH](#) [5534M](#) [9000005073](#) [52104486](#)  
[5315817](#) [N16 025 0112 1](#) [N16 020 0112 1](#) [M6106](#) [7422](#) [NG-9516 Gasket](#) [N16 016 0112 1](#) [NG-9514 Gasket](#) [52006151](#) [2704](#) [BM4940L](#)  
[BM4950L](#) [1.097.2012.50](#) [1.152.1300.01](#) [1.152.2000.50](#) [1.152.2100.01](#) [1.152.2500.50](#) [1.152.4000.50](#) [1.209.1218.70](#) [1.209.2100.15](#)  
[1.209.6400.71](#) [1.609.1100.01](#) [1.609.2900.15](#) [1.609.3200.52](#) [1.609.3600.15](#) [1.609.5000.51](#) [1.609.6300.50](#) [1.676.2500.50](#) [52103150](#) [53112705](#)  
[53112715](#) [53112735](#) [53119073](#) [54115405](#) [52004120](#) [52001894](#)