

“Stay Connected” with



HEYware Products


a PennEngineering® Company



Heyco® “Standard Plus” Nylon Washers and Spacers

Outside Dia. ➤		PART NOS.								
		.312" (7,9 mm)			.375" (9,5 mm)			.500" (12,7 mm)		
Inside Dia. D ➤		.194" (4,9 mm)	.140" (3,6 mm)	.171" (4,3 mm)	.194" (4,9 mm)	.140" (3,6 mm)	.171" (4,3 mm)	.194" (4,9 mm)	.219" (5,6 mm)	.257" (6,5 mm)
in.	A	#10	#6	#8	#10	#6	#8	#10	#12	1/4-20
.032	0,8			RS-3717-0032	RS-3719-0032					RS-5025-0032
.063	1,6			RS-3717-0063	RS-3719-0063					RS-5025-0063
.093	2,4			RS-3717-0093	RS-3719-0093					RS-5025-0093
.125	3,2	RS-3119-0125	RS-3714-0125	RS-3717-0125	RS-3719-0125	RS-5014-0125	RS-5017-0125	RS-5019-0125	RS-5021-0125	RS-5025-0125
.187	4,7	RS-3119-0187	RS-3714-0187	RS-3717-0187	RS-3719-0187	RS-5014-0187	RS-5017-0187	RS-5019-0187	RS-5021-0187	RS-5025-0187
.250	6,4	RS-3119-0250	RS-3714-0250	RS-3717-0250	RS-3719-0250	RS-5014-0250	RS-5017-0250	RS-5019-0250	RS-5021-0250	RS-5025-0250
.312	7,9	RS-3119-0312	RS-3714-0312	RS-3717-0312	RS-3719-0312	RS-5014-0312	RS-5017-0312	RS-5019-0312	RS-5021-0312	RS-5025-0312
.375	9,5	RS-3119-0375	RS-3714-0375	RS-3717-0375	RS-3719-0375	RS-5014-0375	RS-5017-0375	RS-5019-0375	RS-5021-0375	RS-5025-0375
.385	9,8	RS-3119-0385*								
.437	11,1	RS-3119-0437	RS-3714-0437	RS-3717-0437	RS-3719-0437	RS-5014-0437	RS-5017-0437	RS-5019-0437	RS-5021-0437	RS-5025-0437
.500	12,7	RS-3119-0500	RS-3714-0500	RS-3717-0500	RS-3719-0500	RS-5014-0500	RS-5017-0500	RS-5019-0500	RS-5021-0500	RS-5025-0500
.562	14,3	RS-3119-0562	RS-3714-0562	RS-3717-0562	RS-3719-0562	RS-5014-0562	RS-5017-0562	RS-5019-0562	RS-5021-0562	RS-5025-0562
.625	15,9	RS-3119-0625	RS-3714-0625	RS-3717-0625	RS-3719-0625	RS-5014-0625	RS-5017-0625	RS-5019-0625	RS-5021-0625	RS-5025-0625
.687	17,4	RS-3119-0687	RS-3714-0687	RS-3717-0687	RS-3719-0687	RS-5014-0687	RS-5017-0687	RS-5019-0687	RS-5021-0687	RS-5025-0687
.750	19,1	RS-3119-0750	RS-3714-0750	RS-3717-0750	RS-3719-0750	RS-5014-0750	RS-5017-0750	RS-5019-0750	RS-5021-0750	RS-5025-0750
.812	20,6	RS-3119-0812	RS-3714-0812	RS-3717-0812	RS-3719-0812	RS-5014-0812	RS-5017-0812	RS-5019-0812	RS-5021-0812	RS-5025-0812
.875	22,2	RS-3119-0875	RS-3714-0875	RS-3717-0875	RS-3719-0875	RS-5014-0875	RS-5017-0875	RS-5019-0875	RS-5021-0875	RS-5025-0875
.937	23,8	RS-3119-0937	RS-3714-0937	RS-3717-0937	RS-3719-0937	RS-5014-0937	RS-5017-0937	RS-5019-0937	RS-5021-0937	RS-5025-0937
1.000	25,4	RS-3119-1000	RS-3714-1000	RS-3717-1000	RS-3719-1000	RS-5014-1000	RS-5017-1000	RS-5019-1000	RS-5021-1000	RS-5025-1000

Standard color natural
* “Plus” Length

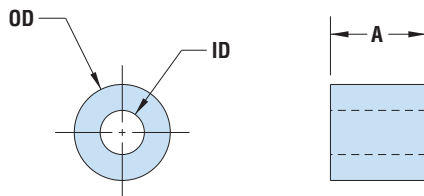

- Ideal for use in electrical and electronic assemblies.
- Tough and resilient.
- Can also be used as bushings, bearings, rollers, and glides.
- Special sizes and lengths available. Consult Heyco.
- Tolerances: O.D. ±.015, I.D. ±.005, Length ±.015
- Part number key: RS-XXYY-ZZZZ, where XX = first two digits of the OD, YY = first two digits of the ID, and ZZZZ = length x 1000 (up to 9.999")

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 149° F (65°C)

Quick Specs

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standoffs & Spacers](#) category:

Click to view products by [Heyco](#) manufacturer:

Other Similar products are found below :

[588-6208-02](#) [599-9844-02](#) [M0516-3-N](#) [M0518-3-N](#) [M0521-3-N](#) [M0524-3-N](#) [M0532-35-N](#) [M0543-4-AL](#) [M0544-35-N](#) [M0544-3-N](#) [M0545-3-AL](#) [M0553-3-N](#) [M0608-5-SS](#) [M0609-5-SS](#) [M0651-5-SS](#) [M0653-35-N](#) [M0654-4-SS](#) [M0655-5-AL](#) [M0658-35-AL](#) [M0660-4-AL](#) [M0670-35-N](#) [M0671-5-N](#) [M0671-5-SS](#) [M0722-5-N](#) [M0725-6-N](#) [M0904-B-25-AL](#) [M1273-2545-AL](#) [M1273-2545-SS](#) [M1273-3005-AL](#) [M1273-3005-SS](#) [M1274-3005-AL](#) [60187](#) [60202-SP](#) [60273](#) [60348-SP](#) [60419-SP](#) [60425-SP](#) [60473-SP](#) [60475-SP](#) [60477-SP](#) [60489-SP](#) [60491-SP](#) [60585-SP](#) [60762-SP](#) [60763-SP](#) [60872-SP](#) [M1303-3506-AL](#) [M1307-3506-AL](#) [M1314-3005-AL](#) [M1314-3005-SS](#)