

3-TERMINAL 0.1A NEGATIVE VOLTAGE REGULATOR


FEATURES

- Output Current Up to 100mA
- No External Components
- Internal Thermal Overload Protection
- Internal Short-Circuit Limiting
- Output Voltage of -5V, -6V, -8V, -9V, -12V, -15V, -18V and -24V.
- Moisture Sensitivity Level 3

DESCRIPTION

This series of fixed-voltage monolithic integrated-circuit voltage regulators is designed for a wide range of applications. These applications include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. In addition, they can be used with power-pass elements to make high current voltage regulators.

Each of these regulators can deliver up to 100mA of output current. The internal limiting and thermal shutdown features of these regulators make them essentially immune to overload. When used as a replacement for a zener diode-resistor combination, an effective improvement in output impedance can be obtained together with lower-bias current.

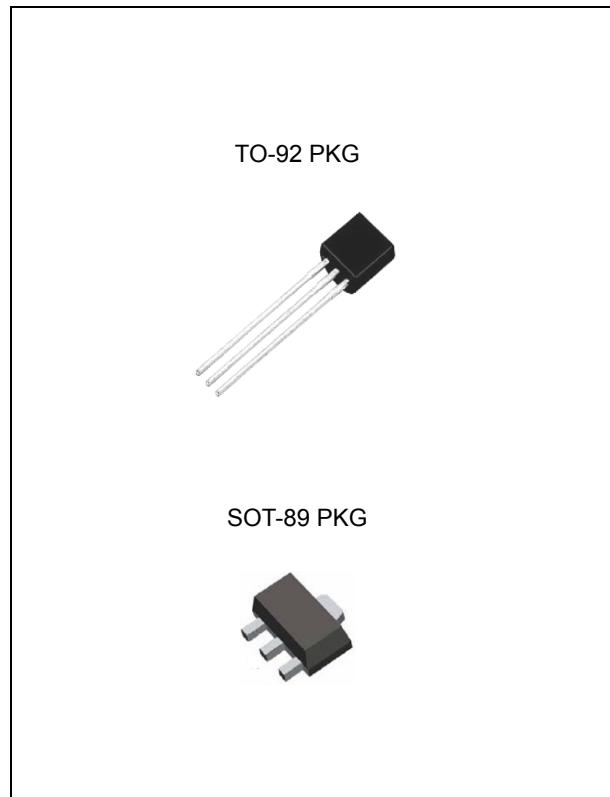

Absolute Maximum Ratings

| CHARACTERISTIC | | SYMBOL | MIN. | MAX. | UNIT |
|--|-------------------|-------------------|------|-------|------|
| Input Voltage | LM79L05 ~ LM79L09 | V _{IN} | - | -30 | V |
| | LM79L12 ~ LM79L18 | | - | -35 | |
| | LM79L24 | | - | -40 | |
| Maximum Power Dissipation at T _A = 25°C / TO-92 | | P _{DMax} | - | 0.770 | W |
| Thermal Resistance Junction-To-Ambient / TO-92 | | θ _{JA} | - | 162 | °C/W |
| Lead Temperature (Soldering, 10 sec) | | T _{SOL} | - | 260 | °C |
| Storage Temperature Range | | T _{STG} | -65 | 150 | °C |
| Operating Junction Temperature Range | | T _{JOPR} | 0 | 150 | °C |


Recommended Operating Conditions

| CHARACTERISTIC | | SYMBOL | MIN. | MAX. | UNIT |
|--|---------|-----------------|-------|------|------|
| Input Voltage | LM79L05 | V _{IN} | -7 | -20 | V |
| | LM79L06 | | -8 | -20 | |
| | LM79L08 | | -10.5 | -23 | |
| | LM79L09 | | -11.5 | -24 | |
| | LM79L12 | | -14.5 | -27 | |
| | LM79L15 | | -17.5 | -30 | |
| | LM79L18 | | -20.5 | -33 | |
| | LM79L24 | | -27 | -38 | |
| Output Current | | I _O | - | 100 | mA |
| Operating Virtual Junction Temperature | | T _J | 0 | 125 | °C |


ORDERING INFORMATION

| DEVICE | PACKAGE TYPE | MARKING | PACKING | PACKING QTY |
|--------------|--------------|---------|---------|--------------|
| LM79L05Z | TO-92 | 79L05 | BAG | 1000pcs/box |
| LM79L06Z | TO-92 | 79L06 | BAG | 1000pcs/box |
| LM79L08Z | TO-92 | 79L08 | BAG | 1000pcs/box |
| LM79L09Z | TO-92 | 79L09 | BAG | 1000pcs/box |
| LM79L12Z | TO-92 | 79L12 | BAG | 1000pcs/box |
| LM79L15Z | TO-92 | 79L15 | BAG | 1000pcs/box |
| LM79L18Z | TO-92 | 79L18 | BAG | 1000pcs/box |
| LM79L24Z | TO-92 | 79L24 | BAG | 1000pcs/box |
| LM79L05MK/TR | SOT-89 | 79L05 | REEL | 1000pcs/reel |
| LM79L06MK/TR | SOT-89 | 79L06 | REEL | 1000pcs/reel |
| LM79L08MK/TR | SOT-89 | 79L08 | REEL | 1000pcs/reel |
| LM79L09MK/TR | SOT-89 | 79L09 | REEL | 1000pcs/reel |
| LM79L12MK/TR | SOT-89 | 79L12 | REEL | 1000pcs/reel |
| LM79L15MK/TR | SOT-89 | 79L15 | REEL | 1000pcs/reel |
| LM79L18MK/TR | SOT-89 | 79L18 | REEL | 1000pcs/reel |
| LM79L24MK/TR | SOT-89 | 79L24 | REEL | 1000pcs/reel |

PIN CONFIGURATION



TO-92




SOT-89

PIN DESCRIPTION

| Pin No. | TO-92 / SOT-89 3 LEAD | |
|---------|-----------------------|----------------|
| | Name | Function |
| 1 | GND | Ground |
| 2 | V _{IN} | Input Voltage |
| 3 | V _{OUT} | Output Voltage |

TYPICAL APPLICATION

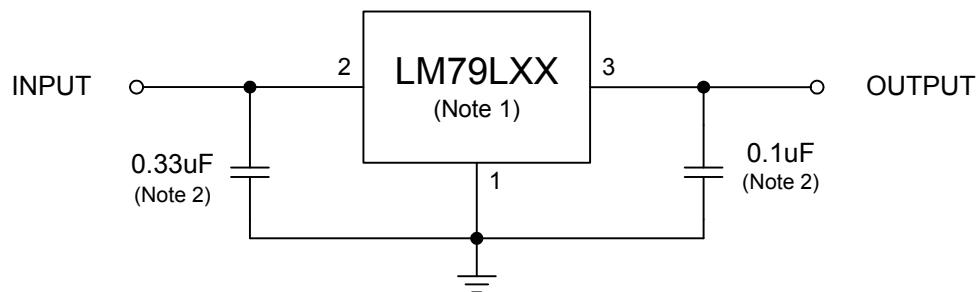

Note 1. To specify an output voltage, substitute voltage for "XX".

Note 2. Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

ELECTRICAL CHARACTERISTICS

LM79L05 (At specified virtual junction temperature, $V_{IN} = 10V$, $I_o = 40mA$ (Unless otherwise noted)

| PARAMETER | SYMBOL | TEST CONDITION ^(Note 1) | MIN. | TYP. | MAX. | UNIT |
|------------------------------------|-------------------|--|-------------|-------|------|------|
| Output Voltage ^(Note 2) | V_{OUT} | 25°C | -4.8 | -5 | -5.2 | V |
| | | 1mA ≤ I_o ≤ 40mA -7V ≤ V_{IN} ≤ 20V | 0°C ~ 125°C | -4.75 | -5 | |
| | | 1mA ≤ I_o ≤ 70mA | | -4.75 | -5 | |
| Line Regulation | ΔV_{LINE} | -7V ≤ V_{IN} ≤ -20V | 25°C | 32 | 150 | mV |
| | | -8V ≤ V_{IN} ≤ -20V | | 26 | 100 | |
| Load Regulation | ΔV_{LOAD} | 1mA ≤ I_o ≤ 100mA | 25°C | 15 | 60 | mV |
| | | 1mA ≤ I_o ≤ 40mA | | 8 | 30 | |
| Bias Current | I_B | | 25°C | 3.8 | 6 | mA |
| | | | 125°C | | 5.5 | |
| Bias Current Change | ΔI_B | -8V ≤ V_{IN} ≤ -20V | 0°C ~ 125°C | | 1.5 | mA |
| | | 1mA ≤ I_o ≤ 40mA | | | 0.1 | |
| Output Noise Voltage | V_N | 10Hz ≤ f ≤ 100kHz | 25°C | 42 | | uV |
| Ripple Rejection | RR | -8V ≤ V_{IN} ≤ -18V, $f=120Hz$ | 25°C | 41 | 49 | dB |
| Dropout Voltage | V_D | | 25°C | 1.7 | | V |

LM79L06 (At specified virtual junction temperature, $V_{IN} = 11V$, $I_o = 40mA$ (Unless otherwise noted)

| PARAMETER | SYMBOL | TEST CONDITION ^(Note 1) | MIN. | TYP. | MAX. | UNIT |
|------------------------------------|-------------------|---|-------------|------|-------|------|
| Output Voltage ^(Note 2) | V_{OUT} | 25°C | -5.76 | -6 | -6.24 | V |
| | | 1mA ≤ I_o ≤ 40mA -8V ≤ V_{IN} ≤ -21V | 0°C ~ 125°C | -5.7 | -6 | |
| | | 1mA ≤ I_o ≤ 70mA | | -5.7 | -6 | |
| Line Regulation | ΔV_{LINE} | -8V ≤ V_{IN} ≤ -21V | 25°C | 50 | 150 | mV |
| | | -9V ≤ V_{IN} ≤ -21V | | 45 | 110 | |
| Load Regulation | ΔV_{LOAD} | 1mA ≤ I_o ≤ 100mA | 25°C | 12 | 70 | mV |
| | | 1mA ≤ I_o ≤ 40mA | | 5.5 | 35 | |
| Bias Current | I_B | | 25°C | | 6 | mA |
| | | | 125°C | | 5.5 | |
| Bias Current Change | ΔI_B | -9V ≤ V_{IN} ≤ -21V | 0°C ~ 125°C | | 1.5 | mA |
| | | 1mA ≤ I_o ≤ 40mA | | | 0.1 | |
| Output Noise Voltage | V_N | 10Hz ≤ f ≤ 100kHz | 25°C | 50 | | uV |
| Ripple Rejection | RR | -9V ≤ V_{IN} ≤ -19V, $f=120Hz$ | 25°C | 39 | 47 | dB |
| Dropout Voltage | V_D | | 25°C | 1.7 | | V |

LM79L08 (At specified virtual junction temperature, $V_{IN} = 14V$, $I_o = 40mA$ (Unless otherwise noted)

| PARAMETER | SYMBOL | TEST CONDITION ^(Note 1) | MIN. | TYP. | MAX. | UNIT | |
|------------------------------------|-------------------|--|-------------|------|------|------|----|
| Output Voltage ^(Note 2) | V_{OUT} | 25°C | -7.7 | -8 | -8.3 | V | |
| | | 1mA ≤ I_o ≤ 40mA -10.5V ≤ V_{IN} ≤ -23V | 0°C ~ 125°C | -7.6 | -8 | -8.4 | |
| | | 1mA ≤ I_o ≤ 70mA | | -7.6 | -8 | -8.4 | |
| Line Regulation | ΔV_{LINE} | -10.5V ≤ V_{IN} ≤ -23V | 25°C | 20 | 175 | mV | |
| | | -11V ≤ V_{IN} ≤ -23V | | 12 | 125 | | |
| Load Regulation | ΔV_{LOAD} | 1mA ≤ I_o ≤ 100mA | 25°C | 18 | 80 | mV | |
| | | 1mA ≤ I_o ≤ 40mA | | 9 | 42 | | |
| Bias Current | I_B | | 25°C | | | 6.5 | mA |
| | | | 125°C | | | 6 | |
| Bias Current Change | ΔI_B | -11V ≤ V_{IN} ≤ -23V | 0°C ~ 125°C | | | 1.5 | mA |
| | | 1mA ≤ I_o ≤ 40mA | | | | 0.1 | |
| Output Noise Voltage | V_N | 10Hz ≤ f ≤ 100kHz | 25°C | | 60 | | uV |
| Ripple Rejection | RR | -12V ≤ V_{IN} ≤ -23V, $f=120Hz$ | 25°C | 42 | 49 | | dB |
| Dropout Voltage | V_D | | 25°C | | 1.7 | | V |

LM79L09 (At specified virtual junction temperature, $V_{IN} = 15V$, $I_o = 40mA$ (Unless otherwise noted)

| PARAMETER | SYMBOL | TEST CONDITION ^(Note 1) | MIN. | TYP. | MAX. | UNIT | |
|------------------------------------|-------------------|--|-------------|-------|-------|-------|----|
| Output Voltage ^(Note 2) | V_{OUT} | 25°C | -8.64 | -9 | -9.36 | V | |
| | | 1mA ≤ I_o ≤ 40mA -11V ≤ V_{IN} ≤ -24V | 0°C ~ 125°C | -8.55 | 9 | -9.45 | |
| | | 1mA ≤ I_o ≤ 70mA | | -8.55 | 9 | -9.45 | |
| Line Regulation | ΔV_{LINE} | -11V ≤ V_{IN} ≤ -24V | 25°C | 80 | 200 | mV | |
| | | -12V ≤ V_{IN} ≤ -24V | | 20 | 160 | | |
| Load Regulation | ΔV_{LOAD} | 1mA ≤ I_o ≤ 100mA | 25°C | 17 | 90 | mV | |
| | | 1mA ≤ I_o ≤ 40mA | | 8 | 45 | | |
| Bias Current | I_B | | 25°C | 3.8 | 6.5 | mA | |
| | | | 125°C | | 6 | | |
| Bias Current Change | ΔI_B | -12V ≤ V_{IN} ≤ -24V | 0°C ~ 125°C | | | 1.5 | mA |
| | | 1mA ≤ I_o ≤ 40mA | | | | 0.1 | |
| Output Noise Voltage | V_N | 10Hz ≤ f ≤ 100kHz | 25°C | | 64 | | uV |
| Ripple Rejection | RR | -8V ≤ V_{IN} ≤ -18V, $f=120Hz$ | 25°C | 35 | 43 | | dB |
| Dropout Voltage | V_D | | 25°C | | 1.7 | | V |

LM79L12 (At specified virtual junction temperature, $V_{IN} = 19V$, $I_o = 40mA$ (Unless otherwise noted)

| PARAMETER | SYMBOL | TEST CONDITION ^(Note 1) | MIN. | TYP. | MAX. | UNIT |
|------------------------------------|-------------------|--|-------------|-------|-------|-------|
| Output Voltage ^(Note 2) | V_{OUT} | 25°C | -11.5 | -12 | -12.5 | V |
| | | 1mA ≤ I_o ≤ 40mA -14.5V ≤ V_{IN} ≤ -27V | 0°C ~ 125°C | -11.4 | -12 | -12.6 |
| | | 1mA ≤ I_o ≤ 70mA | | -11.4 | -12 | -12.6 |
| Line Regulation | ΔV_{LINE} | -14.5V ≤ V_{IN} ≤ -27V | 25°C | 50 | 250 | mV |
| | | -16V ≤ V_{IN} ≤ -27V | | 40 | 200 | |
| Load Regulation | ΔV_{LOAD} | 1mA ≤ I_o ≤ 100mA | 25°C | 24 | 100 | mV |
| | | 1mA ≤ I_o ≤ 40mA | | 15 | 50 | |
| Bias Current | I_B | | 25°C | | 6.5 | mA |
| | | | 125°C | | 6 | |
| Bias Current Change | ΔI_B | -16V ≤ V_{IN} ≤ -27V | 0°C ~ 125°C | | 1.5 | mA |
| | | 1mA ≤ I_o ≤ 40mA | | | 0.1 | |
| Output Noise Voltage | V_N | 10Hz ≤ f ≤ 100kHz | 25°C | 70 | | uV |
| Ripple Rejection | RR | -15V ≤ V_{IN} ≤ -25V, $f=120Hz$ | 25°C | 37 | 42 | dB |
| Dropout Voltage | V_D | | 25°C | 1.7 | | V |

LM79L15 (At specified virtual junction temperature, $V_{IN} = 23V$, $I_o = 40mA$ (Unless otherwise noted)

| PARAMETER | SYMBOL | TEST CONDITION ^(Note 1) | MIN. | TYP. | MAX. | UNIT |
|------------------------------------|-------------------|--|-------------|--------|-------|--------|
| Output Voltage ^(Note 2) | V_{OUT} | 25°C | -14.4 | -15 | -15.6 | V |
| | | 1mA ≤ I_o ≤ 40mA -17.5V ≤ V_{IN} ≤ -30V | 0°C ~ 125°C | -14.25 | -15 | -15.75 |
| | | 1mA ≤ I_o ≤ 70mA | | -14.25 | -15 | -15.75 |
| Line Regulation | ΔV_{LINE} | -17.5V ≤ V_{IN} ≤ -30V | 25°C | 65 | 300 | mV |
| | | -27V ≤ V_{IN} ≤ -30V | | 58 | 250 | |
| Load Regulation | ΔV_{LOAD} | 1mA ≤ I_o ≤ 100mA | 25°C | 25 | 150 | mV |
| | | 1mA ≤ I_o ≤ 40mA | | 15 | 75 | |
| Bias Current | I_B | | 25°C | 4.2 | 6.5 | mA |
| | | | 125°C | | 6 | |
| Bias Current Change | ΔI_B | -20V ≤ V_{IN} ≤ -30V | 0°C ~ 125°C | | 1.5 | mA |
| | | 1mA ≤ I_o ≤ 40mA | | | 0.1 | |
| Output Noise Voltage | V_N | 10Hz ≤ f ≤ 100kHz | 25°C | 82 | | uV |
| Ripple Rejection | RR | -18.5V ≤ V_{IN} ≤ -28.5V, $f=120Hz$ | 25°C | 37 | 44 | dB |
| Dropout Voltage | V_D | | 25°C | 1.7 | | V |

LM79L18 (At specified virtual junction temperature, $V_{IN} = 26V$, $I_o = 40mA$ (Unless otherwise noted)

| PARAMETER | SYMBOL | TEST CONDITION ^(Note 1) | MIN. | TYP. | MAX. | UNIT |
|------------------------------------|-------------------|--|-------------|-------|-------|-------|
| Output Voltage ^(Note 2) | V_{OUT} | 25°C | -17.3 | -18 | -18.7 | V |
| | | 1mA ≤ I_o ≤ 40mA -20.5V ≤ V_{IN} ≤ -33V | 0°C ~ 125°C | -17.1 | -18 | -18.9 |
| | | 1mA ≤ I_o ≤ 70mA | | -17.1 | -18 | -18.9 |
| Line Regulation | ΔV_{LINE} | -20.7V ≤ V_{IN} ≤ -33V | 25°C | 70 | 360 | mV |
| | | -21V ≤ V_{IN} ≤ -33V | | 64 | 300 | |
| Load Regulation | ΔV_{LOAD} | 1mA ≤ I_o ≤ 100mA | 25°C | 27 | 180 | mV |
| | | 1mA ≤ I_o ≤ 40mA | | 19 | 90 | |
| Bias Current | I_B | | 25°C | 4.7 | 6.5 | mA |
| | | | 125°C | | 6 | |
| Bias Current Change | ΔI_B | -21V ≤ V_{IN} ≤ -33V | 0°C ~ 125°C | | 1.5 | mA |
| | | 1mA ≤ I_o ≤ 40mA | | | 0.1 | |
| Output Noise Voltage | V_N | 10Hz ≤ f ≤ 100kHz | 25°C | 82 | | uV |
| Ripple Rejection | RR | -23V ≤ V_{IN} ≤ -33V, f=120Hz | 25°C | 32 | 36 | dB |
| Dropout Voltage | V_D | | 25°C | 1.7 | | V |

LM79L24 (At specified virtual junction temperature, $V_{IN} = 32V$, $I_o = 40mA$ (Unless otherwise noted)


| PARAMETER | SYMBOL | TEST CONDITION ^(Note 1) | MIN. | TYP. | MAX. | UNIT |
|------------------------------------|-------------------|--|-------------|-------|------|-------|
| Output Voltage ^(Note 2) | V_{OUT} | 25°C | -23 | -24 | -25 | V |
| | | 1mA ≤ I_o ≤ 40mA -27V ≤ V_{IN} ≤ -38V | 0°C ~ 125°C | -22.8 | -24 | -25.2 |
| | | 1mA ≤ I_o ≤ 70mA | | -22.8 | -24 | -25.2 |
| Line Regulation | ΔV_{LINE} | -27V ≤ V_{IN} ≤ -38V | 25°C | 95 | 480 | mV |
| | | -28V ≤ V_{IN} ≤ -38V | | 78 | 400 | |
| Load Regulation | ΔV_{LOAD} | 1mA ≤ I_o ≤ 100mA | 25°C | 41 | 240 | mV |
| | | 1mA ≤ I_o ≤ 40mA | | 28 | 120 | |
| Bias Current | I_B | | 25°C | 4.8 | 6.5 | mA |
| | | | 125°C | | 6 | |
| Bias Current Change | ΔI_B | -21V ≤ V_{IN} ≤ -38V | 0°C ~ 125°C | | 1.5 | mA |
| | | 1mA ≤ I_o ≤ 40mA | | | 0.1 | |
| Output Noise Voltage | V_N | 10Hz ≤ f ≤ 100kHz | 25°C | 82 | | uV |
| Ripple Rejection | RR | -29V ≤ V_{IN} ≤ -35V, f=120Hz | 25°C | 30 | 33 | dB |
| Dropout Voltage | V_D | | 25°C | 1.7 | | V |

Note 1. Pulse testing techniques are used to maintain the junction temperature as close to the ambient temperature as possible. Thermal effects must be taken into account separately.


All characteristics are measured with a 0.33uF capacitor across the input and a 0.1uF capacitor across the output.

Note 2. This specification applies only for DC power dissipation permitted by absolute maximum ratings.


TYPICAL OPERATING CHARACTERISTICS

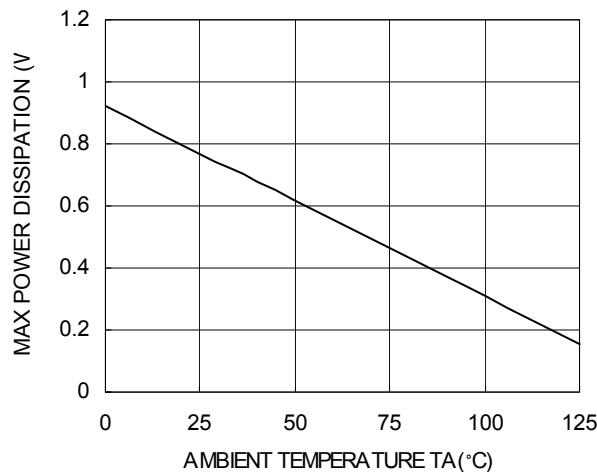


Power Dissipation vs. Ambient Temperature, TO-92

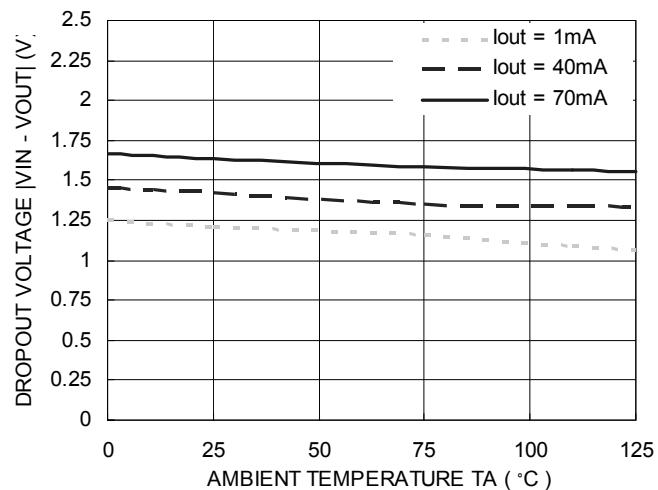


Dropout Voltage vs. Ambient Temperature

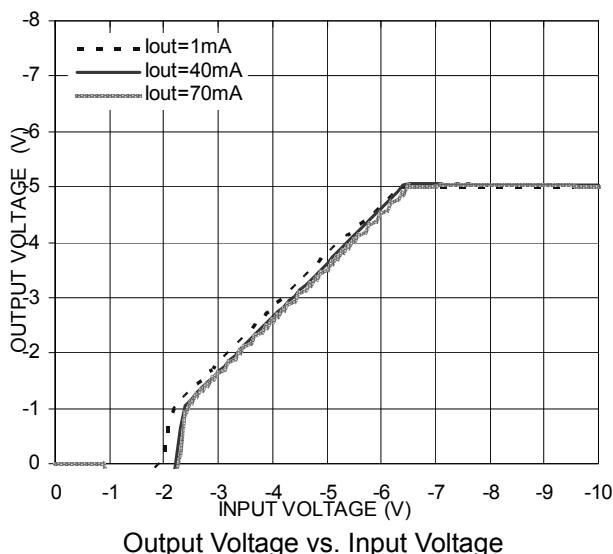


Output Voltage vs. Input Voltage

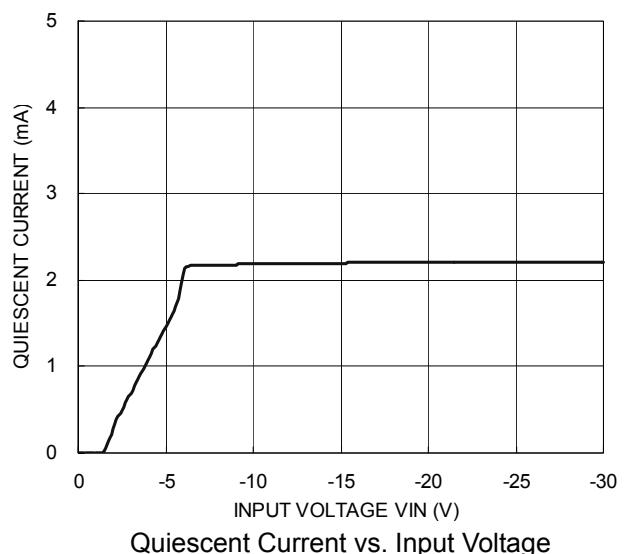


Quiescent Current vs. Input Voltage

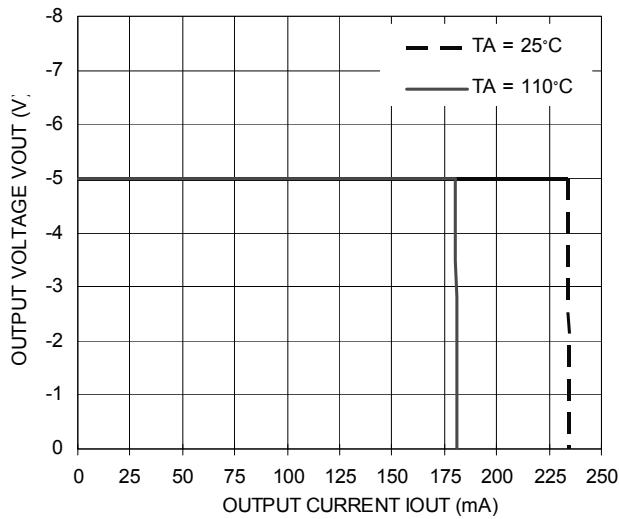

Output Voltage vs. Output Current

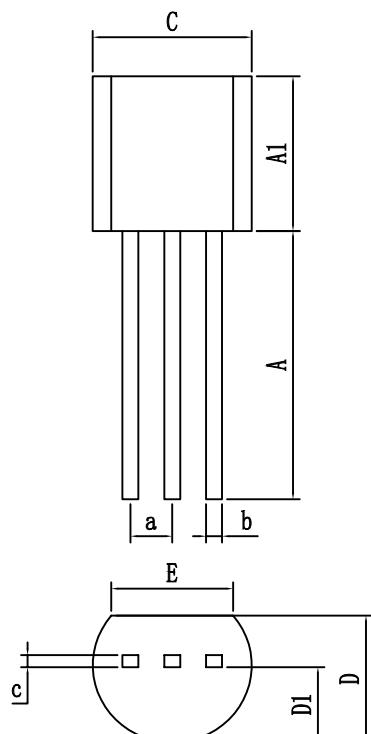PACKAGE
TO-92

Dimensions In Millimeters
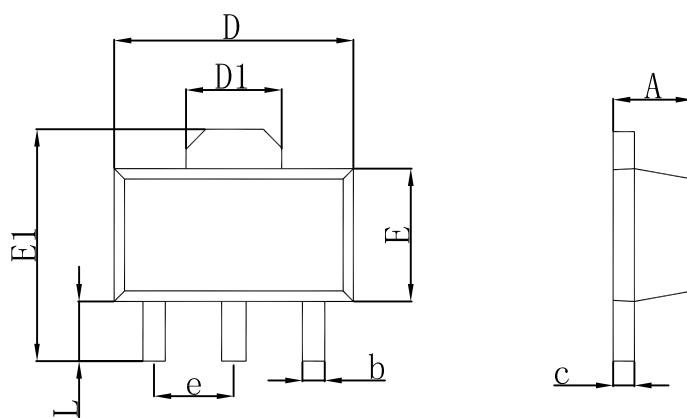
| Symbol : | Min : | Max : | Symbol : | Min : | Max : |
|-----------|--------|--------|----------|-----------|-------|
| A | 11.200 | 12.700 | E | 3.430 | 3.830 |
| A1 | 4.320 | 5.340 | a | 1.270 TYP | |
| C | 4.440 | 5.210 | b | 0.485 TYP | |
| D | 3.170 | 4.190 | c | 0.380 TYP | |
| D1 | 2.030 | 2.670 | | | |

SOT89-3L

Dimensions In Millimeters

| Symbol : | Min : | Max : | Symbol : | Min : | Max : |
|-----------|-------|-------|-----------|-----------|-------|
| A | 1.400 | 1.600 | c | 0.350 | 0.440 |
| E | 2.300 | 2.600 | D1 | 1.550 REF | |
| E1 | 3.940 | 4.250 | b | 0.450 TYP | |
| D | 4.400 | 4.600 | e | 1.500 TYP | |
| L | 0.900 | 1.200 | | | |

Important statement:

Huaguan Semiconductor Co,Ltd. reserves the right to change the products and services provided without notice. Customers should obtain the latest relevant information before ordering, and verify the timeliness and accuracy of this information.

Customers are responsible for complying with safety standards and taking safety measures when using our products for system design and machine manufacturing to avoid potential risks that may result in personal injury or property damage.

Our products are not licensed for applications in life support, military, aerospace, etc., so we do not bear the consequences of the application of these products in these fields.

Our documentation is only permitted to be copied without any tampering with the content, so we do not accept any responsibility or liability for the altered documents.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [HGSEMI](#) manufacturer:

Other Similar products are found below :

[LV56831P-E](#) [LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [PQ3DZ53U](#) [LV56801P-E](#) [TLE42794G](#) [L78L05CZ/1SX](#) [L78LR05DL-MA-E](#) [636416C](#) [714954EB](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L78M15CV-DG](#) [L79M05T-E](#) [TLS202A1MBVHTSA1](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [MP2018GZD-5-Z](#) [MP2018GZD-33-Z](#) [MIC5281-3.3YMM](#) [MC78L06BP-AP](#) [TA48LS05F\(TE85L,F\)](#) [TA78L12F\(TE12L,F\)](#) [TC47BR5003ECT](#) [TCR2LN12,LF\(S\)](#) [TCR2LN28,LF\(S\)](#) [TCR2LN30,LF\(S\)](#) [TCR3DF295,LM\(CT](#) [TCR3DF40,LM\(CT](#) [BA178M20CP-E2](#) [L78M12ABDT](#) [LM7812SX/NOPB](#) [LR645N3-G-P003](#) [LR645N3-G-P013](#) [ZXTR2005P5-13](#) [SCD7812BTG](#) [TCR3DF335,LM\(CT](#) [ZXTR2012K-13](#) [TLE42994E V33](#) [ZXTR2008K-13](#) [ZXTR2005K-13](#) [L88R05DL-E](#) [ADP3300ARTZ-2.7RL7](#) [LM120K-15/883](#) [IFX54441LDVXUMA1](#) [LM317D2T-TR](#)