
0.4mm Pitch, 0.7mm Stacking Height, FPC to Board Connectors









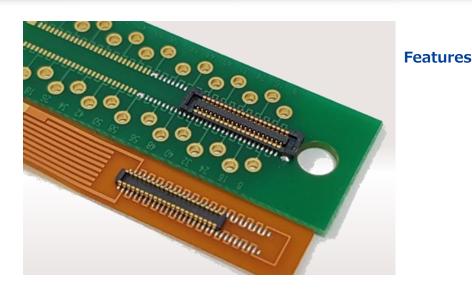


2.51iiii widui

- 2 Robust design with metal solder tabs and ample housing thickness
- 3 Highly reliable 2-point contact design
- 4 Easy mating operation with clear tactile click and wide self alignment range
- 5 Wide vacuum pick & place area with 2.5mm width
- 6 Solder wicking prevention and contact protection against dust

Highly reliable contact design

Header contact 2-point contact length 0.15mm Receptacle contact Low profile 0.7mm

Robust design



the stress by drop impact

Ample housing thickness minimizes damage

Specifications

Rated Current	0.3A
Rated Voltage	30V AC
Operating Temperature	-55 to +85°C*
Contact Resistance	100mΩ Max. (20mV AC, 1kHz, 1mA)
Withstanding Voltage	100V AC for 1 minute
Insulation Resistance	50MΩ Min. (100V DC)

^{*} Includes the temperature rise by current flow.

·Variations: 16, 24 pos.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Board to Board & Mezzanine Connectors category:

Click to view products by Hirose manufacturer:

Other Similar products are found below:

589158040000018 FCN-230C068-11 FCN-268F012-G/BD FCN-268F036-G/BD FCN-268M012-G/0D FCN-268M024-G/1D FCN-723J004/1 MIS-048-01-F-D-DP-K 832-10-034-10-001000 FX4C-80S-1.27DSA FCN-214Q030-G/0 FCN-234P048-G/0 FCN-235D050-G/C 2-22603-0 AXG720047 5031084030 MIT-114-03-F-D-K 55323-1519 YFT-20-05-H-03-SB-K 503308-3040 026-6203-PDB 027-6203-PDB 069159702701000 10123981-102LF 101A10019X 55650-0588-C 68682-310LF 68684-306 75140-7012 87471-650 YTW-30-07-H-Q-410-140 194261-1 FCN-268F024-G0D 10124054-515LF 68685-603 8-1616154-3 MIS-019-01-F-D FCN-268M024-G/3D FCN-268M036-G/BD 20021832-06016C1LF KX15-20KLDL-E1000E AXE810124 FCN-214J100-G/0 FCN-230C068-E/S AXE812124 AXE816124 AXE720127 354184 MIT-019-04-F-D-K P50-028-DDS-TG