


APPLICABLE STANDARD					
RATING	OPERATING TEMPERATURE RANGE	-35°C TO +85°C (NOTES 1)	STORAGE TEMPERATURE RANGE	-10°C TO + 60°C	
	VOLTAGE	250V AC	APPLICABLE CONNECTOR	MDF92-19P-2. 54DSA	
	CURRENT	3A			
SPECIFICATIONS					
ITEM	TEST METHOD		REQUIREMENTS	QT	AT
CONSTRUCTION					
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.	X	X
MARKING	CONFIRMED VISUALLY.			X	X
ELECTRIC CHARACTERISTICS					
CONTACT RESISTANCE	100m A (DC OR 1000 Hz).		30mΩ MAX.	X	-
INSULATION RESISTANCE	500V DC.		1000MΩ MIN.	X	-
VOLTAGE PROOF	650V AC FOR 1 min.		NO FLASHOVER OR BREAKDOWN.	X	-
MECHANICAL CHARACTERISTICS					
CONTACT INSERTION AND EXTRACTION FORCES	□0.635 ± 0.002mm BY STEEL GAUGE		INSERTION FORCE : 4.4 N MAX. EXTRACTION FORCE : 0.2 N MIN	X	-
INSERTION AND WITHDRAWAL FORCES	MEASURED BY APPLICACLE CONNECTOR		INSERTION FORCE : 30N MAX. WITHDRAWAL FORCE : 8 N MIN	X	-
MECHANICAL OPERATION	50TIMES INSERTIONS AND EXTRACTIONS.		① CONTACT RESISTANCE: 30mΩ MAX. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	-
VIBRATION	FREQUENCY 10 TO 55 Hz, SINGLE AMPLITUDE 0.75 mm, AT 2 h, FOR 3 DIRECTIONS.		① NO ELECTRICAL DISCONTINUITY OF 10μs. ② CONTACT RESISTANCE: -mΩ MAX ③ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	-
SHOCK	490 m/s <sup>2</sup> DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.		① NO ELECTRICAL DISCONTINUITY OF 10μs. ② CONTACT RESISTANCE: -mΩ MAX ③ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	-
ENVIRONMENTAL CHARACTERISTICS					
RAPID CHANGE OF TEMPERATURE	TEMPERATURE -55→ 5 TO 35→ 85→ 5 TO 35°C TIME 30→10 TO 15→ 30→10TO15min UNDER 5 CYCLES.		① CONTACT RESISTANCE: 30mΩ MAX. ② INSULATION RESISTANCE: 1000 MΩ MIN. ③ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	-
DAMP HEAT (STEADY STATE)	EXPOSED AT 40 ± 2 °C, 90 TO 95 %, 96 h.		① CONTACT RESISTANCE: 30mΩ MAX. ② INSULATION RESISTANCE: 500 MΩ MIN. ③ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	X	-
CORROSION SALT MIST	EXPOSED IN 5% SALT WATER SPRAY FOR 48 h.		① CONTACT RESISTANCE: 60 mΩ MAX. ② NO HEAVY CORROSION.	X	-
SULPHUR DIOXIDE	EXPOSED IN 10 PPM FOR 96 h. (TEST STANDARD: JEIDA-39)		① CONTACT RESISTANCE: 60 mΩ MAX. ② NO HEAVY CORROSION.	X	-
RESISTANCE TO SOLDERING HEAT	SOLDER TEMPERATURE 260 ± 5°C, FOR IMMERSION DURATION 10S		NO DEFORMATION OF CASE OF EXCESSIVE LOOSENESS OF THE THE TERMINALS.	X	-
SOLERABILITY	SOLDERED AT SOLDER TEMPERATURE 245 ± 5°C FOR IMMERSION DURATION 5S.		SOLDER SHALL COVER A MINIMUM OF 95% OF THE SURFACE BEING IMMersed	X	-
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
REMARKS NOTE1: INCLUDING THE TEMPERATURE RISE BY CURRENT.  UNLESS OTHERWISE SPECIFIED, REFER TO JIS C 5402.			APPROVED	MO. NAKAMURA	05.08.10
			CHECKED	TS. MIYAZAKI	05.08.10
			DESIGNED	YH. MICHIDA	05.08.09
			DRAWN	YH. MICHIDA	05.08.09
Note	QT: Qualification Test AT: Assurance Test X: Applicable Test		DRAWING NO.	ELC4-160702-05	
	SPECIFICATION SHEET		PART NO.	MDF92-19S-2. 54DSA (05)	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL547-0443-6-05	1/1

TO

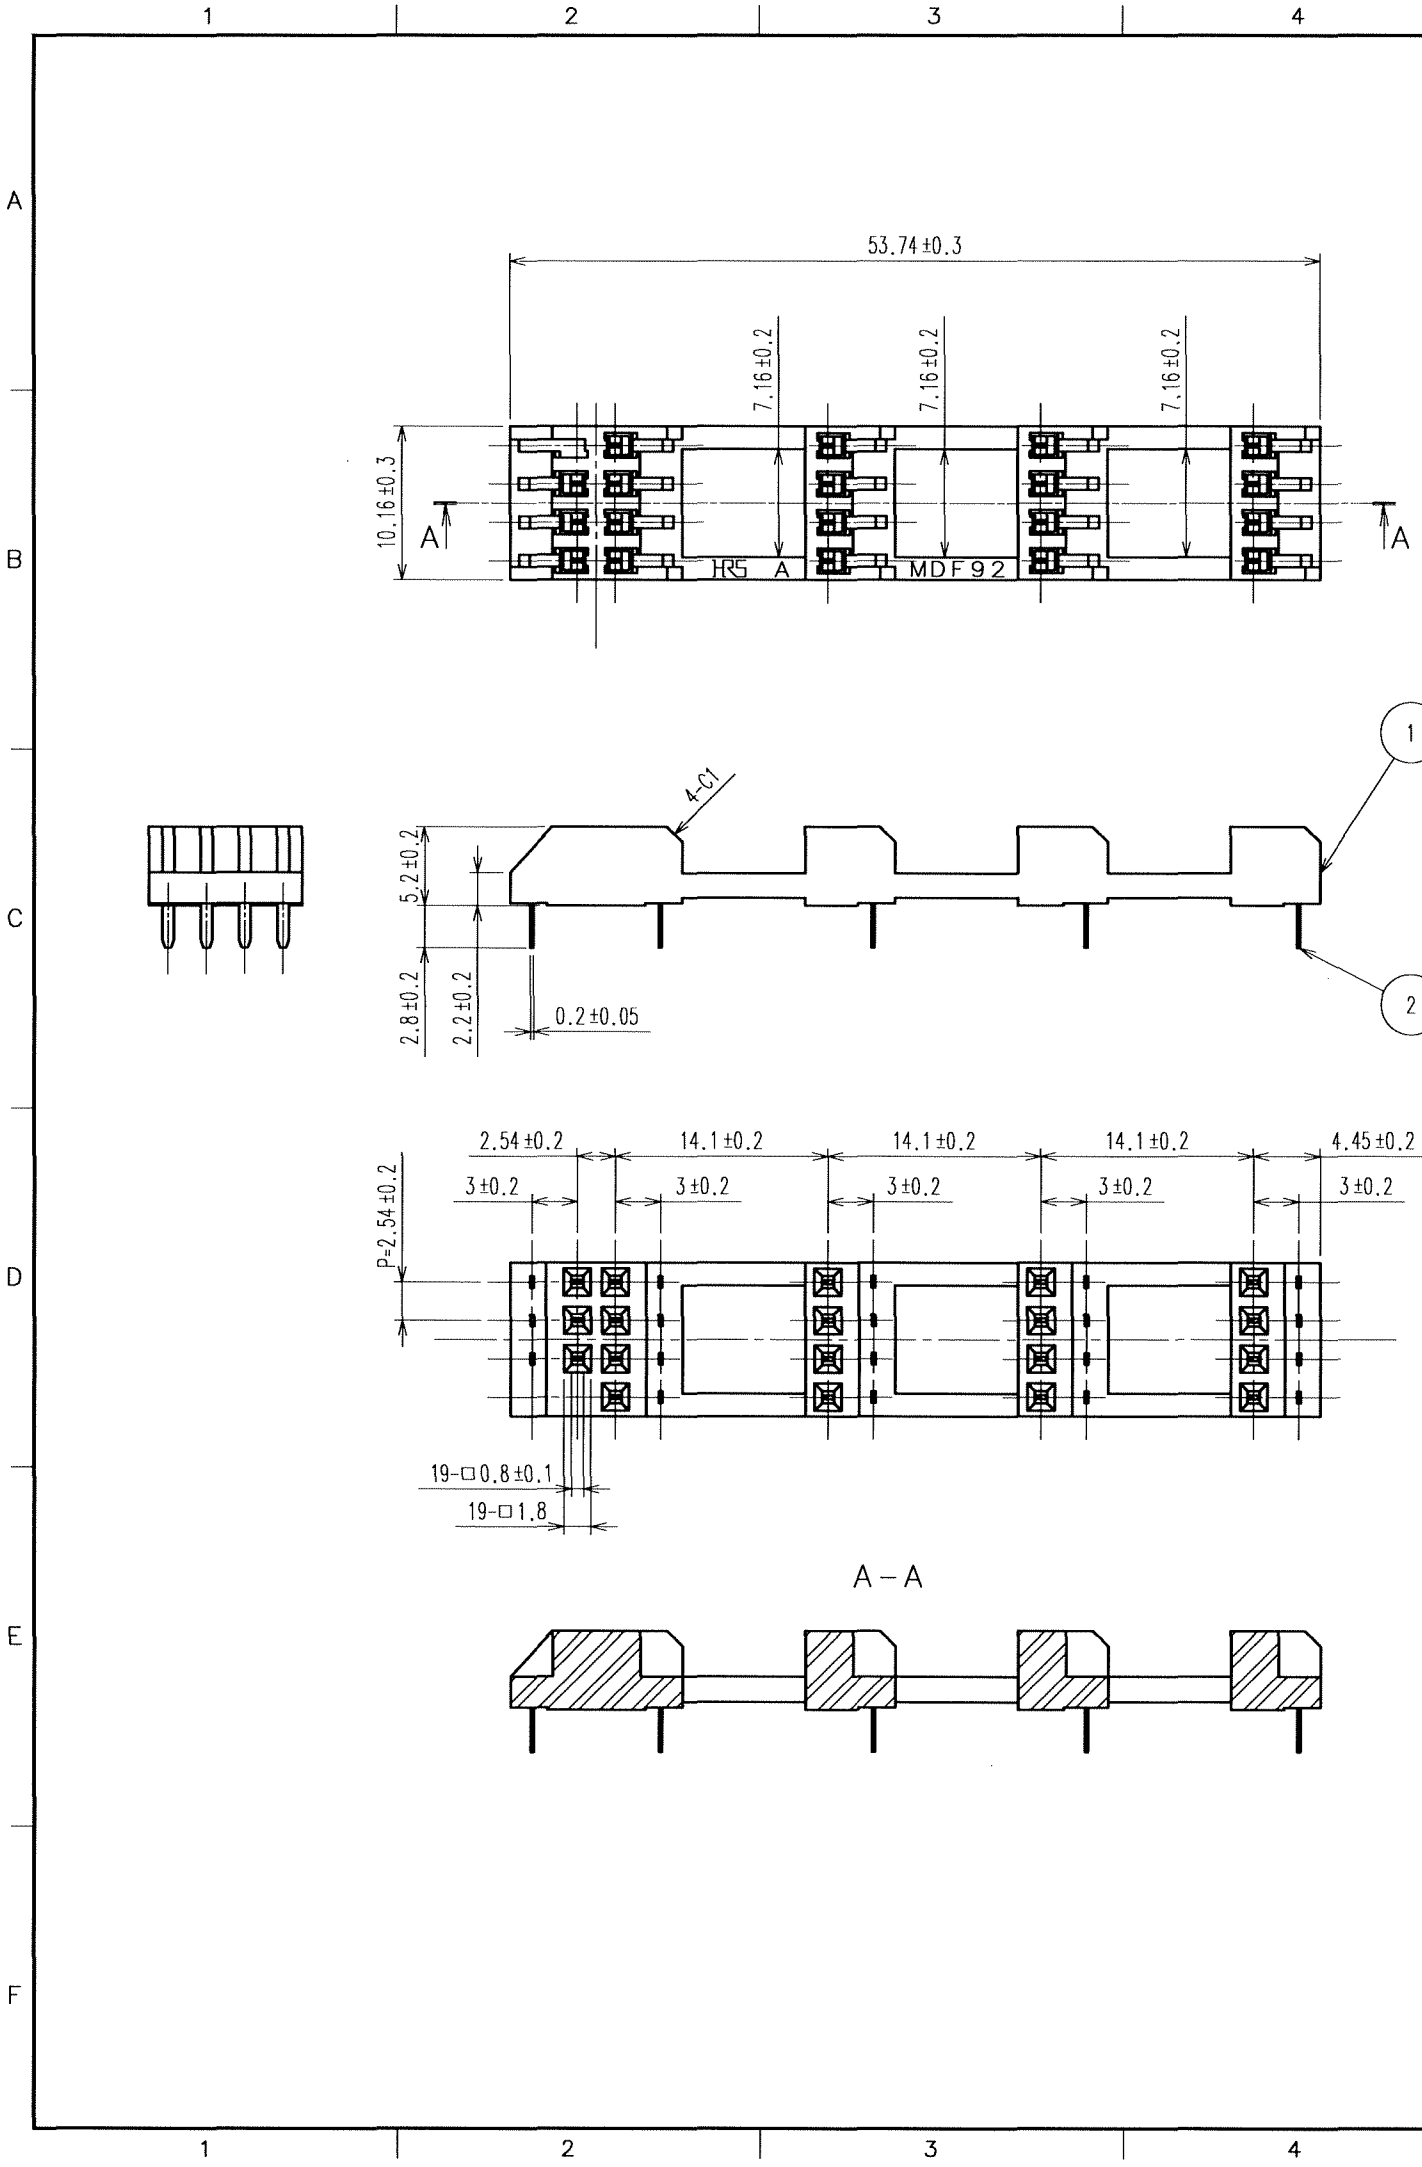

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Hirose](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)  
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)