

NEW

Water-Proof Optical Connector with MT Ferrule

MF11BMT Series

IP67

12, 24 pos.

Bayonet lock



■ Features

- 1. Water-proof multi-pos. connector**
MT Ferrule into waterproof metal shell.
- 2. Bayonet lock**
Easy and secure installation and removal with Bayonet lock design.
- 3. Harsh environments**
IP67 water-proof compliant.
- 4. MPO cleaner can be used**
Plug and receptacle can be cleaned with MPO cleaner.
- 5. 5000 mating times**
Robust metal shell enables 5000 insertion/extraction.

■ Usage

Broadcasting camera etc.

■ Product Specifications


Ratings	Operating temperature range	-20°C to +60°C	Storage temperature range	-40°C to +60°C (packaged)
---------	-----------------------------	----------------	---------------------------	---------------------------

Item	Testing method	Specifications
Optical performance		
Insertion loss	Wavelength : 850 ± 30nm (LED)	0.75dB or less (GI)
Mechanical characteristic		
Insertion/extraction cycles	5,000 times	Insertion loss after test : 0.75dB or less (per each connection), No damage, crack or loosened.
Vibration resistance	Frequency range : 10 to 55Hz, half amplitude : 0.75mm, acceleration : 98.1m/s ² , bidirection 2 hours each	
Shock resistance	Acceleration : 98.1m/s ² , duration : 6ms, half-sin wave in 2 axes, 3 cycles each	
Environmental performance		
Temperature/humidity cycles	-10°C to +65°C, humidity : 90% to 96%, 168 hours (12 hours/cycle × 14 cycles)	Insertion loss after test : 0.75dB or less (per each connection), No damage, crack or loosened.
Temperature cycles	-40°C to +75°C, 336 hours (8 hours/cycle × 42 cycles)	
Heat resistance	+85°C, 240 hours	
Cold-resistance	-40°C, 240 hours	
Humidity resistance	75°C, 95% for 168 hours	
Salt spray	Concentration : 5%, 240 hours	No corrosion which is effect on the performance.
Waterproof	Add 4.9KPa for 1 minute. (IP67)	No leak of bubbles

■ Materials/ Finish

Part name	Materials	Finish
Plug shell and receptacle	Zinc diecast	Nickel plated
Crimp washer Crimp ring	Brass	Nickel plated
O-ring, rubber ring, gasket	Silicon rubber	—————
Screw ring	PPS	—————
Spring	Piano wire	Zinc plated
Guide pin	Stainless steel	—————


■ Plug

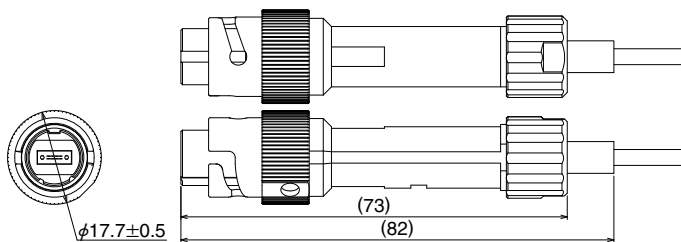


Part No.	HRS No.	Specification
MF11BMT-WP4CB01	709-7003-0 00	φ4mm cable for 24 pos.

■ Receptacle

● M2 screw

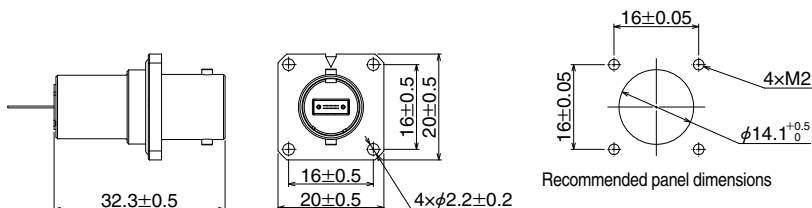

● Bulkhead screw type

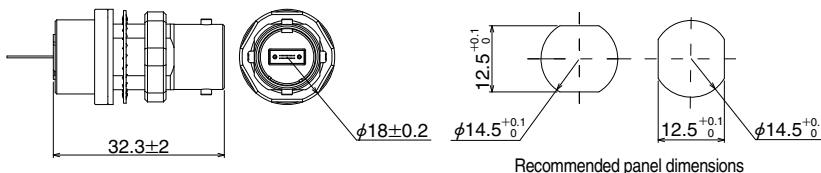


Part No.	HRS No.	Specification
MF11BMT-WRFB01	709-7001-0 00	Square flange for 24 pos.
MF11BMT-WRBB01	709-7010-0 00	Bulk head for 24 pos.

◆ Tooling

● Retention plate installation tooling


For installing retention plate for the plug or receptacle.

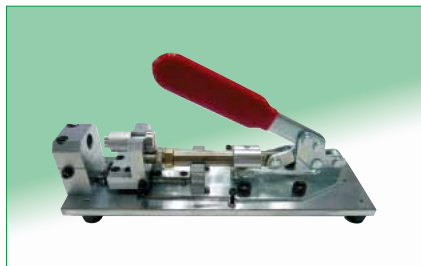

Part No.	HRS No.
MF11BMT-W01/CV-MD	906-6075-0 00

● Crimp tool

For crimping the plug retention ring.

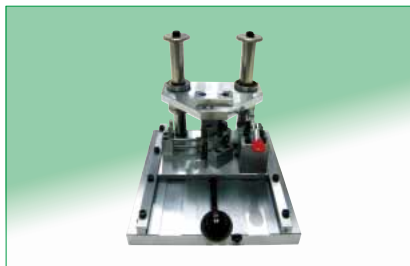

Part No.	HRS No.
MF11BMT-WP01/CR-MP	906-6076-0 00



HIROSE ELECTRIC CO.,LTD.

2-6-3,Nakagawa Chuoh,Tsuzuki-Ku,Yokohama-Shi 224-8540,JAPAN
 TEL: +81-45-620-3526 Fax: +81-45-591-3726
<http://www.hirose.com>
<http://www.hirose-connectors.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fibre Optic Connectors](#) category:

Click to view products by [Hirose](#) manufacturer:

Other Similar products are found below :

[0004700001](#) [6100-R](#) [6313](#) [F709722200](#) [F709730000](#) [F718183204](#) [F727403500](#) [F727752800](#) [8119](#) [9440F20-27S-190](#) [944-120-6001](#)
[9441F10SL-3S](#) [9444W28-21S](#) [9444W36-10S](#) [9446F10SL-4S](#) [9446W20-16S](#) [953-101-5310-P](#) [954-101-57202B](#) [A0270169](#) [12-9122](#) [12-5702](#)
[AX101713](#) [AX102420](#) [AX103923](#) [AX104024](#) [AX104193](#) [AX104230](#) [AX104562](#) [AX105203-B25](#) [AX105205-S1](#) [EHSC2M](#) [17-300800](#)
[181-011-126](#) [181-011-S](#) [181-057-126](#) [HRFC-R2\(40\)](#) [NKSOPBUY](#) [20500002116](#) [2064996-1](#) [20800001065](#) [2170](#) [9132](#) [2612](#) [2620](#) [9291](#)
[9440F16-10S](#) [9440F20-18S](#) [9446F16-10S-190](#) [953-106-50231](#) [953-120-5003](#)