


Clamp-type Test Probe 4 mm system

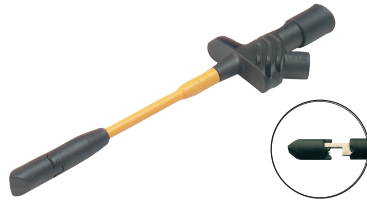

Type

KLEPS 2700

Safety clamp-type test probe with split test clamp. The sprung stainless steel tip can contact insulated leads with cross-sections between 0.25 mm² and 1.5 mm² (3.5 mm diameter) without the need to strip them. 4 mm diameter brass socket connection.

Clamping range 3.5 mm
Clamp type spring-loaded stainless steel tip

PART NO. / Housing color
972307100 ●
972307101 ●



KLEPS 2800

Safety clamp-type test probe with wide opening grip claws for contacting large measuring areas and leads with large cross-sections. 4 mm brass socket connection. Connects with safety measuring leads.

10 mm
grip claws

972308100 ●
972308101 ●



KLEPS 2900

Safety clamp-type test probe with unsprung hook to ensure secure clamping of eyes, pins, wires and boards. 4 mm brass socket connection. Connects with safety measuring leads.

5.5 mm
contact hook

972309100 ●
972309101 ●

Technical data

Type of termination socket Ø 4 mm
Rated voltage AC/DC 1000 V
Measurement cat. acc. to IEC61010 CAT III
Rated current* 10 A
Contact resistance 100 mOhm
Certificate CE

Material Specifications

Contact material tip: stainless steel, socket: brass
Contact surface material nickel
Housing material PBT

Environmental conditions

Temperature range -25 °C to +80 °C

Inflamability class

Housing (basic material) UL 94 HB

socket Ø 4 mm
AC/DC 1000 V
CAT III
20 A
100 mOhm
CE

grip claws: spring steel, socket: brass
nickel
PBT

-25 °C to +80 °C

UL 94 HB

socket Ø 4 mm
AC/DC 1000 V
CAT III
20 A
50 mOhm
CE




contact hook: brass, socket: brass
nickel
PBT

-25 °C to +80 °C

UL 94 HB

Drawing

Measurements are shown in millimeters.
Multiply by 0.03937 to convert to inches.

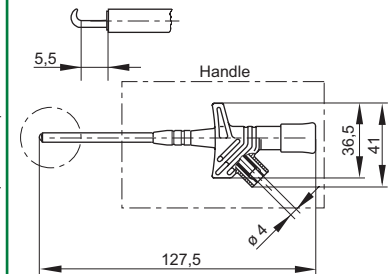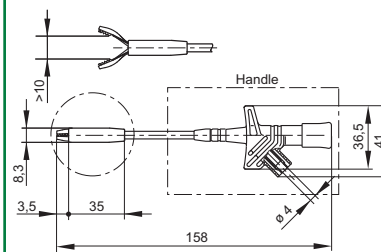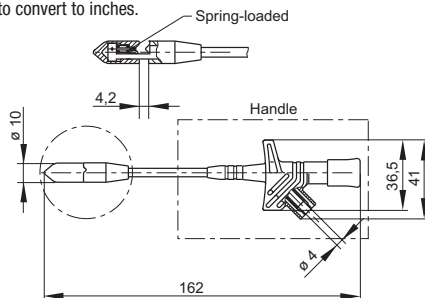

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [hirschmann](#) manufacturer:

Other Similar products are found below :

[931298001 GSP 211 PG11](#) [934828001 BRSCIS 4D/9](#) [930011200 MAB 6](#) [G 30 KW 3 M](#) [934066788](#) [934061103](#) [934059104](#) [930046100](#)
[943301-001](#) [934061704](#) [STAK2](#) [PRUEF1SW](#) [SPIDER-PL-20-05T1999999TZ9HHHH](#) [BAT867-RUSW99AU999AT199L999ZHX](#)
[930136106](#) [930317804](#) [934066105](#) [934076103](#) [934086104](#) [934086188](#) [973929000](#) [934157101](#) [934077106](#) [934077105](#) [934064104](#)
[932794001](#) [973601101](#) [GECKO 4TX](#) [972309101](#) [934100707](#) [975455709](#) [975455701](#) [973528101](#) [MESAP 43650](#) [932140100](#) [STAK 3 N](#)
[SCHWARZ](#) [932507005](#) [XZC 0704](#) [975694707](#) [MLSWG100/2.5RT](#) [BAT867-RUSW99CU999AT199L999ZHX](#) [934081100](#) [934089101](#)
[934090100](#) [973929001](#) [975017701](#) [975106101](#) [934157100](#) [930537517](#) [MAB 8100 S](#) [930099100](#) [MLSWG100/2.5SW](#) [GMNL209 NJ LED 24](#)
[HH](#)