

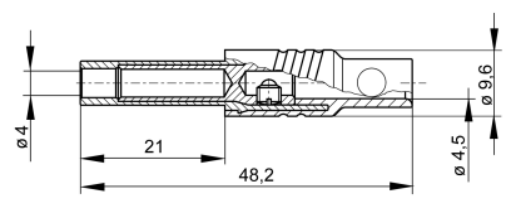


datasheet for KUN S
 article number: 934096104



product description:	
description:	order number: 934 096-104 Safety coupling with screw connection for leads from 0.5mm ² to 1.5mm ² outer diameter of lead max. 4,2mm plug with 4mm plugs and 4mm safety plugs 1000V-system, IEC 61010 simple assembly by "Click" system
typ:	KUN S gruen/green
system:	4mm safety system
order number:	934 096-104
color	
other color versions:	
technical data	
measurement category acc. to IEC 61010:	CAT III
type of contact:	4 mm socket (unsprung)
type of termination:	screw
rated voltage:	AC/DC 1000 V
rated current: Please consider derating curve!	24 A
contact resistance:	10 mOhm
material	
contact material:	brass
contact surface material:	nickel
housing material:	PA
environmental conditions:	
temperature range:	-15 °C to +70 °C
inflammable class:	
housing (basic material):	UL 94 V - 2
drawing	
	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Hirschmann](#) manufacturer:

Other Similar products are found below :

[01-2601-4-0210](#) [01-2601-4-0212](#) [01-2604-4-0212](#) [01-2350-1-02](#) [01-2368-1-02](#) [01-2606-4-0210](#) [01-2606-5-0212](#) [M39024/11-09G](#)
[M39024/11-42](#) [M39024/11-43](#) [M39024/12-08](#) [707-5311](#) [707-5402-01-19](#) [707-5410](#) [R644543000](#) [R948161000](#) [1408-4](#) [1533-1](#) [1659559](#)
[1659567](#) [1663921](#) [1663939](#) [1696-102](#) [174-R825B-EX](#) [1905509](#) [1905527](#) [1914916](#) [211-101](#) [RS100GBL](#) [RS250GBL](#) [251-102](#) [25-2251-2-03](#)
[25-2259-2-03](#) [923743-28-I](#) [2854-BLU](#) [2970-BLK](#) [30-443G](#) [1909861](#) [1916120](#) [1916466](#) [1918007](#) [1919515](#) [1920271](#) [1929125](#) [1933440](#)
[1938303](#) [1944375](#) [204-103](#) [2079](#) [2435108](#)