














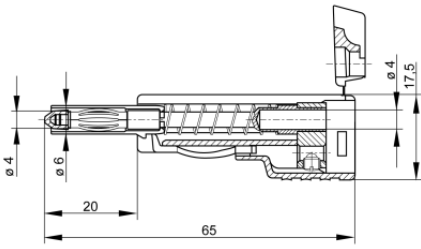


Plugs

SLS 200



Product	SLS 200										
description	<p>Contact protected plug with screw connection for cables up to 2.5 mm², with onward connection capability (4 mm socket). Insulated by latching and sprung insulating sleeve, to be released by pressure on the lateral locking spring.</p> <p>plug with contact spring, 4mm diameter.</p> <p>*For this typ up to DC 150 V, CAT II according IEC/EN 61010-31 item 6.4., comment 4 allowed for devices with not yet protected sockets.</p>										
operating instruction	BA412										
article-no. / *colour	<p>9321531xx</p> <table style="width: 100%; text-align: center;"> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>00 black</td> <td>01 red</td> <td>02 blue</td> <td>03 yellow</td> <td>04 green</td> </tr> </table> <p style="text-align: right;">Ni</p>						00 black	01 red	02 blue	03 yellow	04 green
											
00 black	01 red	02 blue	03 yellow	04 green							
drawing											
technical data											
connection	screw terminal										
rated voltage ⁽¹⁾	30 VAC / 60 VDC										
measurement cat. acc. to IEC 61010	O ⁽³⁾										
rated current ⁽¹⁾ (consider derating curve)	30 A										
material plug	brass, nickel plated										
housing material	PP										
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +80 °C										

4 mm sliding sleeve system

standard	IEC 61010
----------	-----------

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ without rated measurement category, for other circuits that are not directly connected to mains

stand: 07.05.2019

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Test Plugs & Test Jacks](#) category:

Click to view products by [Hirschmann](#) manufacturer:

Other Similar products are found below :

[01-2601-4-0210](#) [01-2601-4-0212](#) [01-2604-4-0212](#) [01-2604-5-0210](#) [01-2150-1-0312](#) [01-2350-1-02](#) [01-2352-1-02](#) [01-2368-1-02](#) [01-2604-4-0210](#) [01-2604-5-0212](#) [01-2606-4-0210](#) [01-2606-4-0212](#) [01-2606-5-0212](#) [M39024/10-01G](#) [M39024/10-17G](#) [M39024/11-09G](#) [M39024/11-42](#) [M39024/11-43](#) [M39024/12-08](#) [707-5311](#) [707-5402-01-19](#) [707-5410](#) [923739-40-I](#) [R644543000](#) [R948161000](#) [R999351000](#) [1408-4](#) [1499-101](#) [1533-1](#) [1659559](#) [1659567](#) [1663921](#) [1663939](#) [1696-102](#) [174-R825B-EX](#) [NYS508-BU](#) [NYS508-O](#) [211-101](#) [RS100GBL](#) [RS250GBL](#) [251-102](#) [25-2251-2-03](#) [25-2259-2-03](#) [923743-16-I](#) [923743-24-I](#) [923743-28-I](#) [2854-BLU](#) [2970-BLK](#) [30-443G](#) [1680](#)