


6	7	8
REVISION	DESCRIPTION	DATE
A0	首次发行	21.05.14
		DRAFTER
		S. He

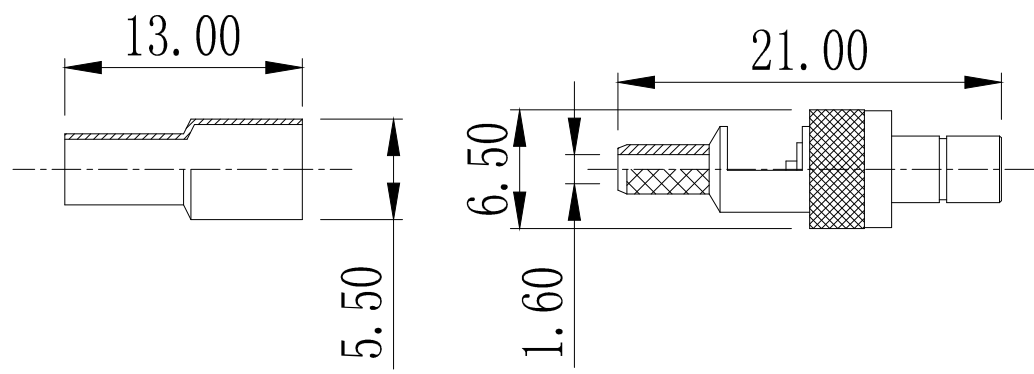

电气性能 (ELECTRICAL CHARACTERISTICS)	
绝缘电阻 (Insulation resistance)	≥1000MΩ
额定电压	250V
接触电阻 (Contact resistance)	内导体 (Center contact) : ≤ 5mΩ
	外导体 (Outer contact) : ≤ 2.5mΩ

2	2LC10PM601-9	镀金尾管	1
1	2LC10PM601-1	SMB-J179, 直式公头公针, 主体镀金	1
No.	PART NAME	SPECIFICATION DESCRIPTION	Q' TY

GENERAL TOLERANCE: LINEAR: X ±0.20 X.X ±0.15 X.XX ±0.05 X.XXX ±0.01 ANGLE: X° ±4.00° X.X° ±3.00° X.XX° ±2.00° X.XXX° ±1.00°		HJ-Tech 东莞市皇捷通讯科技有限公司 手机: 15015262131/13714786106	
FILE NAME: 零件图		TITLE: SMB-J179, 直式公头公针, 主体镀金, L13.0xOD6.5mm+镀金尾管	
ENG/DATE: S. He/21.05.14		P/N: HJ-SMA-J179-SAM	
APP/DATE:		UNIT: mm	SCALE: 1:1
		REVISION: A0	SHEET: 1/1

COMPLIANCE WITH THE REQUIREMENT: RoHS; HF; SONY SS-00259; OTHERS
*NO USING ESTRICTED AND BANNED SUBSTANCE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Connectors / Coaxial Connectors](#) category:

Click to view products by [HJ Technology](#) manufacturer:

Other Similar products are found below :

[8915-1511-000](#) [89674-0827](#) [6001-7071-019](#) [6002-7051-003](#) [6059674-1](#) [619550-1](#) [630059-000](#) [M39012/25-3026](#) [M39030/3-01N](#) [6501-1071-002](#) [6769](#) [7002-1541-010](#) [7003-1542-011](#) [7004-1512-000](#) [7009-1511-004](#) [7029-1511-060](#) [7101-1541-010](#) [7101-1571-002](#) [7105-1521-002](#) [7203-1571-003](#) [7209-1511-011](#) [7210-1511-015](#) [7210-1511-040](#) [7242-1511-000](#) [73216-2241](#) [73404-2300](#) [7405-1521-005](#) [7405-1521-802](#) [7406-1521-005](#) [8527](#) [8547](#) [FS11V](#) [877931](#) [8808-1511-001](#) [9049-9513-000](#) [9074-9513-000](#) [910A205F](#) [PL40-36](#) [PL40-5](#) [PL71-9](#) [980-8666-005](#) [1200690078](#) [1-201144-1](#) [120919](#) [R107003010W](#) [R110A172100](#) [R112186000](#) [R113053000W](#) [R113081000](#) [R113082097](#)