



Features > 采用50V工艺平台制造 > 宽输入电压范围：7.50-35V输入 > 全电压、全电流、全温下输出电压冗余范围±5% > 稳定输出电流达 100mA > 内建过温保护、过压保护、过流保护	Max V_{in}	V_o	ID
	35V	6V	100mA
Package  Marking and pin assignment	Application > 仪器仪表 > 主板电源 > 设备电源模块 > 多路电源系统		
			
	Pin No.	Name	Explication
	1	Vout	输出
	2	GND	芯片地
	3	Vin	输入

Package Marking and Ordering Information

Device Marking	Device	Device Package	Quantity
78H06	78L06	SOT89-3	4000

Absolute Maximum Ratings ($T_c=25^\circ\text{C}$ unless otherwise specified)

Description	Symbol	Value range	Unit
输入电压	V_{in}	-0.30 ~ 35	V
最大结温	T_J	150	$^\circ\text{C}$
最大功耗	P_d	750	mW
热阻 (结到环境)	$R_{\theta JA}$	160	$^\circ\text{C}/\text{W}$
工作温度范围	T_A	-40 ~ 85	$^\circ\text{C}$
存储温度范围	T_{STG}	-55 ~ 150	$^\circ\text{C}$

以上表格参数代表电路能够承受的极限范围。达到或者超过这个参数，电路不能正常工作，并且很大可能会损坏。并且长期工作在临界极限参数，也是会大大增加损坏的几率。


Electrical Characteristics ($T_j=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
输出电压	V_o	$V_{IN} = 10\text{V}, I_o = 40\text{mA}$	5.82	6.00	6.18	V
		$7\text{V} < V_{IN} < 25\text{V}$ $1\text{mA} < I_o < 40\text{mA}$	5.76		6.24	

		$1\text{mA} < I_o < 100\text{mA}$	5.70		6.30	
线性调整率	ΔV_o	$7\text{V} < V_{IN} < 25\text{V}, I_o = 10\text{mA}$		18	100	mV
		$8\text{V} < V_{IN} < 25\text{V}, I_o = 10\text{mA}$		10	70	
负载调整率	ΔV_o	$V_{IN} = 8\text{V}, 1\text{mA} < I_o < 100\text{mA}$		20	60	mV
		$V_{IN} = 8\text{V}, 1\text{mA} < I_o < 40\text{mA}$		5	30	
静态电流	I_Q			2.30	5	mA
静态电流变化	ΔI_Q	$8\text{V} < V_{IN} < 25\text{V}$		0.30	1	mA
		$1\text{mA} < I_o < 40\text{mA}$			1	
输出噪声电压	V_n	$f = 10\text{Hz to } 100\text{KHz}$		40		μV
电源抑制比	PSRR	$f = 100\text{Hz}, 8\text{V} < V_{IN} < 16\text{V}$	47	62		dB
峰值输出电流	I_{PK}			300		mA
电压温度系数	V_{TC}	$I_o = 10\text{mA}$		0.50		$\text{mV}/^\circ\text{C}$
低压差	V_{Drop}	$I_o = 100\text{mA}$		1.75	2	V
		$I_o = 200\text{mA}$		1.95	2.10	
最小输入电压	$V_{IN,MIN}$			7.50	8	V
过压保护阈值	$V_{IN,MAX}$	$I_o = 10\text{mA}$		39		V

Notes:

Typical application

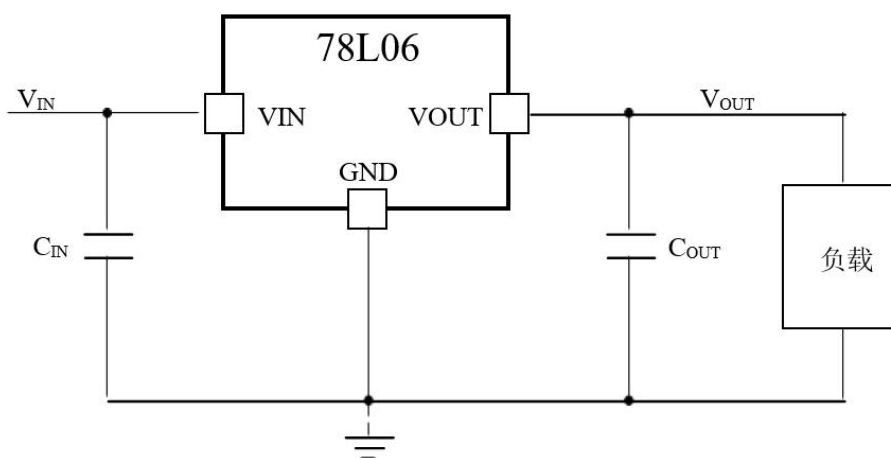






Typical Characteristics (C_{IN}=220nF, C_{OUT}=100nF)


图1 静态电流随输入电压变化


 图2 输出电压随输入电压变化(I_O=10mA)

 图3 输出电压随负载电流变化(V_{IN}=9V)

 图4 输出电压随温度变化(V_{IN}=10V, I_{OUT}=10mA)

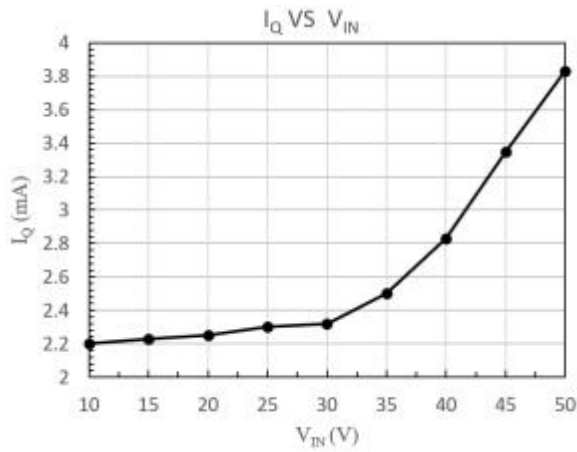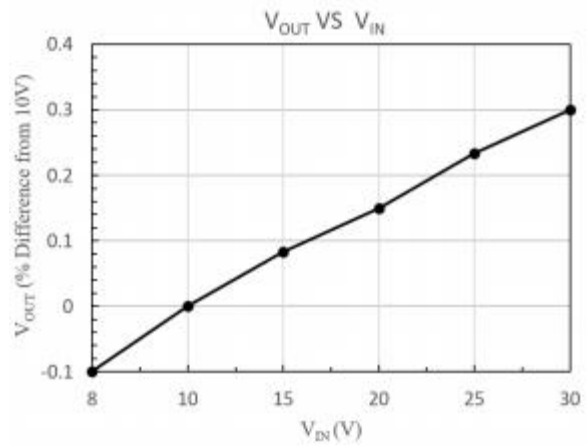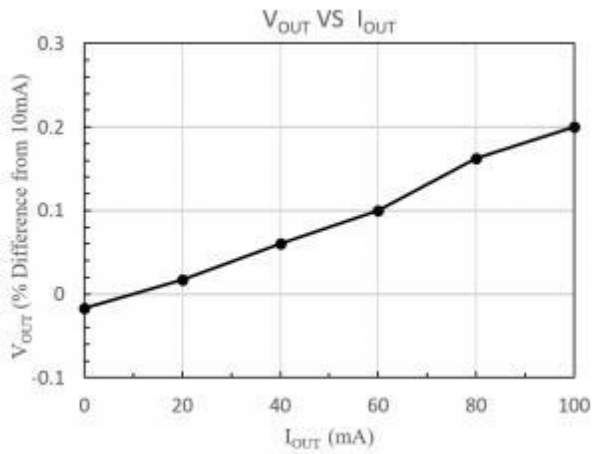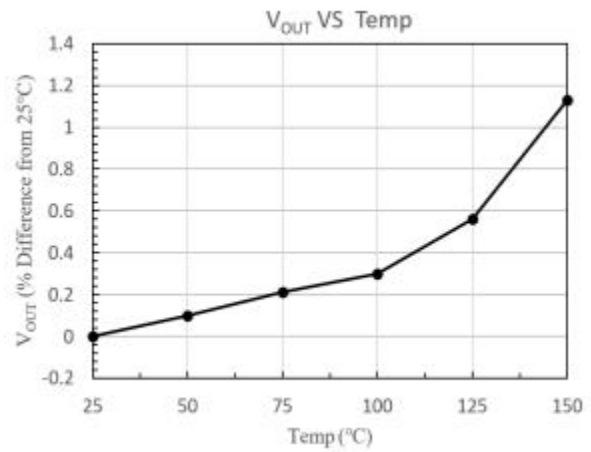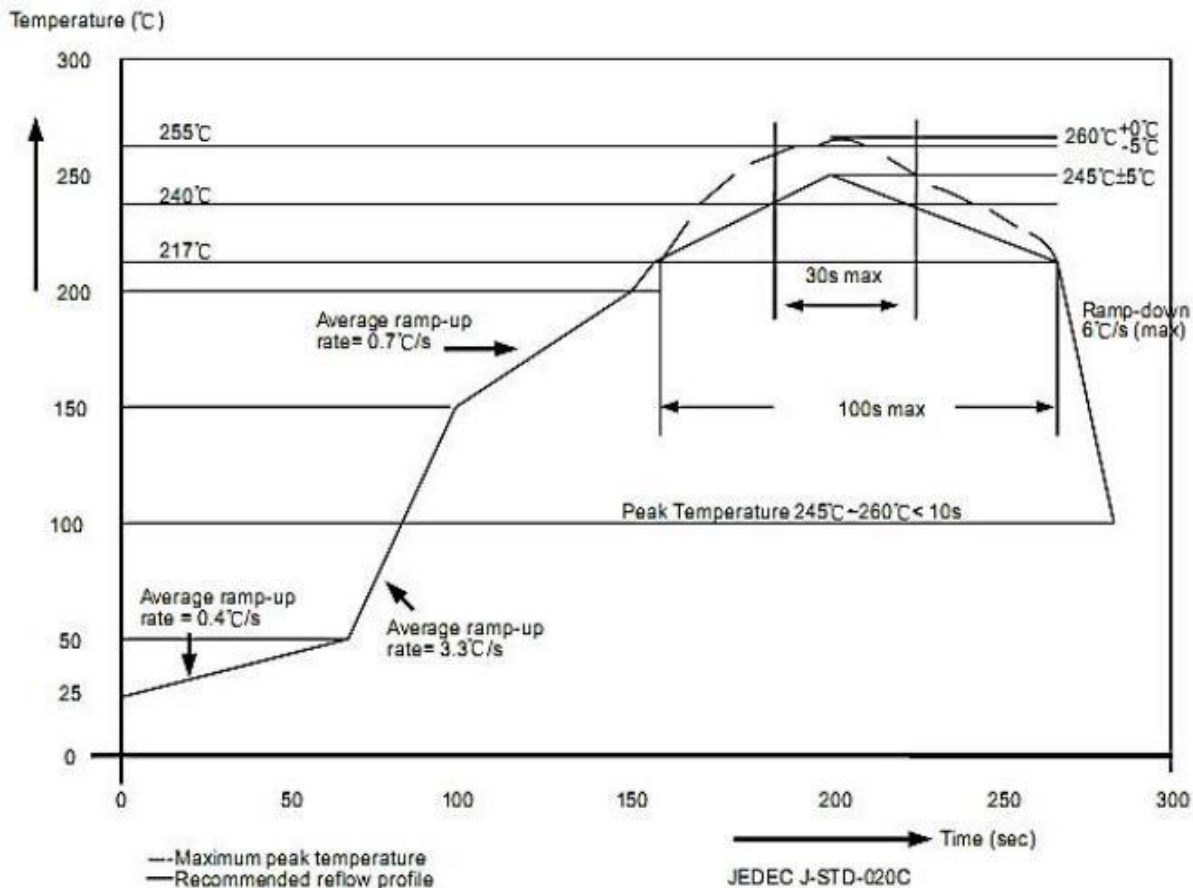


遵循欧洲 RoHs 标准，封装焊接制程锡炉温度符合 J-STD-020 标准

封装厚度	体积 mm ³ < 350	体积 mm ³ : 350~2000	体积 mm ³ ≥ 2000
< 1.6mm	260+0°C	260+0°C	260+0°C
1.6mm~2.5mm	260+0°C	250+0°C	245+0°C
≥ 2.5mm	250+0°C	245+0°C	245+0°C

Package Dimensions

SOT89-3

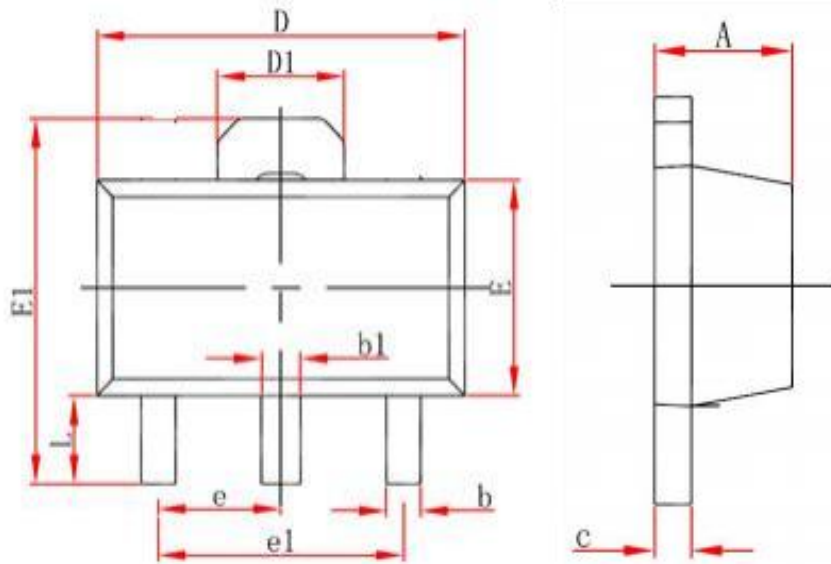

Symbol	Min(mm)	Max(mm)
A	1.3	1.8
b	0.2	0.7
b 1	0.25	0.75
c	0.2	0.6
D	4.3	4.8
E	2.2	2.8
E1	3.8	4.5
D1	1.55(REF)	
e	1.5(TYP)	
e 1	3.0(TYP)	
L	0.8	1.5

Important Notice and Disclaimer



HL Microelectronics reserves the right to make changes to this document and its products and specifications at any time without notice.

Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.

HL Microelectronics makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does HL Microelectronics assume any liability for application assistance or customer product design.

HL Microelectronics does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.

No license is granted by implication or otherwise under any intellectual property rights of HL Microelectronics.

HL Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of HL Microelectronics.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [HL](#) manufacturer:

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#) [78M05](#) [HT7150-1](#) [UM1540DB-18](#) [XC6234H281VR-G](#) [WL2834CA-6/TR](#) [TPL730F33-5TR](#) [TLS850F1TA](#) [V50](#) [TPS549B22RVFR](#) [UM1540DB-33](#) [WL9200P3-50B](#) [WL9100P3-33B](#) [XC6219B152MR](#) [WL2855K33-3/TR](#) [PJ54BM33SE](#) [PJ9500M25SA](#) [MD7218E33PC1](#) [H7533-2PR](#) [SK7812AU](#) [SD1A30](#) [78L33](#) [TP78L33T3](#) [SK6513ST3A-50](#) [SK6054D4-09](#) [SK6054D4-18](#) [SK6054D4-11](#) [SK6054D4-10](#) [LM79L12F](#) [HLP2985AIM5X-5.0](#) [HLP2992AIM5X-5.0/NOPB](#) [HMIC5205-5.0YM5-TR](#)