


Ordering Information
 23 43U-1 XX X N XX S N T 01

Plastic high 4.3=H4.3mm
 No. of Pins Per Row 01~50P
 Insulator Material Option
 A=PT B=PA66 C=PA6T D=PA46 E=PA9T F=LCP
 Contact Plating
 G1:1U" Gold G2:1.5U" Gold G3:2U" Gold G4:3U" Gold G5:5U" Gold G6:10U" Gold G7:15U" Gold S0:Gold Flash/Tn SMTn
 Packing 0-PC Bag
 M=Reel+Mylar
 R=Reel+Cap
 P=Tube+Cap
 T=Tube
 A=Troy
 X.XX ±0.30
 X.XX ±0.25
 X.X ±0.5
 X.X ±2
 X.X ±0.5
 code stream 01~99

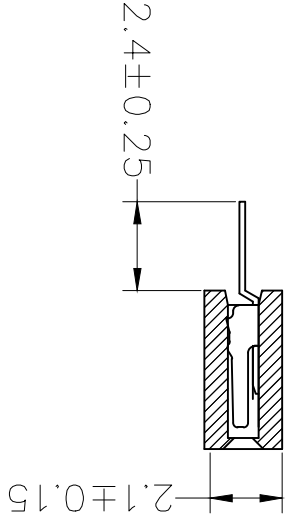

Dimensions	Per row	
	A	B
26	33.42	31.75
27	34.69	33.02
28	35.96	34.29
29	37.23	35.56
30	38.50	36.83
31	39.77	38.10
32	41.04	39.37
33	42.31	40.64
34	43.58	41.91
35	44.85	43.18
36	46.12	44.45
37	47.39	45.72
38	48.66	46.99
39	49.93	48.26
40	51.20	49.53
41	52.47	50.80
42	53.74	52.07
43	55.01	53.34
44	56.28	54.61
45	57.55	55.88
46	58.82	57.15
47	60.09	58.42
48	61.36	59.69
49	62.63	60.96
50	63.90	62.23
51	65.17	63.50
52	66.44	64.77
53	67.71	66.04
54	68.98	67.31
55	70.25	68.58
56	71.52	69.85
57	72.79	71.12
58	74.06	72.39
59	75.33	73.66
60	76.60	74.93
61	77.87	76.20
62	79.14	77.47
63	80.41	78.74
64	81.68	80.01
65	82.95	81.28
66	84.22	82.55
67	85.49	83.82
68	86.76	85.09
69	88.03	86.36
70	89.30	87.63
71	90.57	88.90
72	91.84	90.17
73	93.11	91.44
74	94.38	92.71
75	95.65	93.98
76	96.92	95.25
77	98.19	96.52
78	99.46	97.79
79	100.73	99.06
80	102.00	100.33
81	103.27	101.60
82	104.54	102.87
83	105.81	104.14
84	107.08	105.41
85	108.35	106.68
86	109.62	107.95
87	110.89	109.22
88	112.16	110.49
89	113.43	111.76
90	114.70	113.03
91	115.97	114.30
92	117.24	115.57
93	118.51	116.84
94	119.78	118.11
95	121.05	119.38
96	122.32	120.65
97	123.59	121.92
98	124.86	123.19
99	126.13	124.46
100	127.40	125.73
101	128.67	127.00
102	129.94	128.27
103	131.21	129.54
104	132.48	130.81
105	133.75	132.08
106	135.02	133.35
107	136.29	134.62
108	137.56	135.89
109	138.83	137.16
110	140.10	138.43
111	141.37	139.70
112	142.64	140.97
113	143.91	142.24
114	145.18	143.51
115	146.45	144.78
116	147.72	146.05
117	148.99	147.32
118	150.26	148.59
119	151.53	149.86
120	152.80	151.13
121	154.07	152.40
122	155.34	153.67
123	156.61	154.94
124	157.88	156.21
125	159.15	157.48

SPECIFICATIONS
 Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:50V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C
 Contact Material:Phosphor Bronze
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 250°C for 30-60 seconds
 (260°C for 10 seconds)

Dimensions List

深圳市华宇创精密电子有限公司
 DRAWN BY: 陈一鸣 DATE: 2014-02-23
 CHECKED BY: 马跃 DATE: 2014-02-23
 APPROVED BY: DATE: 2014-02-23
 SHEET NO. 1 OF 1
 DRAW NO: HYC-1812015809
 MOLD NO.
 PART NO. 2343U-1XXXXXSN T01
 PART NAME: 1.27X4.3FH 1XNP 180°

TOLERANCE:
 X.X ±0.30
 X.XX ±0.25
 X.XX ±0.15
 X.X ±2
 X.X ±0.5
 UNIT: mm [inch]
 SCALE:1:1 SIZE: A4
 HOAUC

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HOAUC](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)