


INSPECTION DIMENSION:(A)~(J)

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS:

Contact Current Rating:3 Amperes.
 Dielectric Withstanding Voltage: AC 1000/60sec.r.m.s.
 Insulation Resistance:1000 Megohms Minimum.at DC 500V.
 Contact Resistance:25 Milliohms Maximum.
 Operating Temperature:-55°C to+105°C.
 MECHANICAL CHARACTERISTICS:
 Contact Insertion Force:341 g.Maximum.
 Contact Separation Force:21 g.Minimum.
 MATERIALS:
 Contacts:Brass.
 Insulator: PBT Or High Temperature Plastic
 UL 94V-0 Rated.
 Shell:Cold Roller Steel.
 FINISHES:
 Contact:Gold Flash Or Full Gold.
 Shell:Tin Or Nickel Plated.

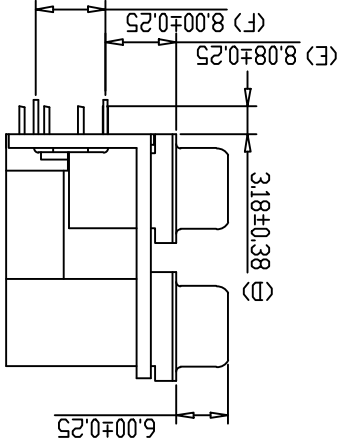

深圳市华宇创精密电子有限公司

TOLERANCE:
 X.X ±0.30
 X.XX ±0.25
 X.XXX ±0.15

X' ±2 X.X' ±0.5'

UNIT: mm [inch]
 SCALE:1:1 SIZE: A4



APPROVED BY: 马跃	DATE: 2014-02-23	MOLD NO.	
CHECKED BY: 陈一鸣	DATE: 2014-02-23	PART NO.	HYC33-VGA18A-158
DRAWN BY: 陈一鸣	DATE: 2014-02-23	PART NAME:	DR9公对DR9公15.88锁螺丝
SHEET NO.	2014-02-23	DRAW NO.	HYC-VGA16072515
1 OF 1			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [HDMI, Displayport & DVI Connectors](#) category:

Click to view products by [HOAUC](#) manufacturer:

Other Similar products are found below :

[1775247-3](#) [2-1932649-5](#) [30-1231](#) [30-528](#) [2069485-1](#) [30-504](#) [30-519](#) [30-542](#) [47648-2000](#) [2002-400](#) [TC142X](#) [1453G1](#) [769-103/021-000](#)
[1932649-1](#) [233-368NFG6-17NH](#) [G45A19071083HR](#) [233-360NF00-17NH](#) [CP30200GM3B](#) [HYC02-DVI29-371](#) [P136-06NHDV4KBP](#)
[CP30116](#) [LTWDID-29PFFS-SL8001](#) [46765-1301](#) [1211-0010-201-001](#) [47271-1004](#) [32-1121-BU](#) [DS1117-BN0-TME-002](#) [MHDR2A11004BP](#)
[EHHDMI2PKG](#) [1903015-3](#) [DS1114-BN0](#) [WPUSBAF](#) [500254-1931](#) [HDMR-19-01-F-SM](#) [47151-1071](#) [1747981-1](#) [0480372000](#) [0482580001](#)
[D121073-19](#) [472710111](#) [HDMI-S-RA6-SMT-MF-15](#) [P142-000-UP](#) [P134-003](#) [P120-08N](#) [KDMIX-FS1V-WS-B](#) [P142-000-UD](#) [10029449-](#)
[101RLF](#) [P132-000](#) [P130-000](#) [P142-06N-MICRO](#)