



Ⓜ **31NM, 32NM**

Φ3.6x10mm, RoHS Compliant & Pb-Free
GLASS TUBE MICROFUSE (FAST-BLOW)
玻璃保险丝管 (速断型)

INTERRUPTING CAPACITY / 分断能力:

50 amperes at 125V AC (100mA-15A)
50 amperes at 250V AC (100mA-15A)

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证					REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
		UL		cUL		CSA	
		H	L	H	L	L	
31NM,32NM-0100H/L	100mA	●	●	●	●	●	0.001375
31NM,32NM-0125H/L	125mA	●	●	●	●	●	0.001763
31NM,32NM-0150H/L	150mA	●	●	●	●	●	0.004396
31NM,32NM-0160H/L	160mA	●	●	●	●	●	0.004689
31NM,32NM-0200H/L	200mA	●	●	●	●	●	0.005861
31NM,32NM-0250H/L	250mA	●	●	●	●	●	0.01093
31NM,32NM-0300H/L	300mA	●	●	●	●	●	0.017196
31NM,32NM-0315H/L	315mA	●	●	●	●	●	0.08236
31NM,32NM-0350H/L	350mA	●	●	●	●	●	0.09546
31NM,32NM-0375H/L	375mA	●	●	●	●	●	0.1172
31NM,32NM-0400H/L	400mA	●	●	●	●	●	0.1389
31NM,32NM-0500H/L	500mA	●	●	●	●	●	0.09975
31NM,32NM-0600H/L	600mA	●	●	●	●	●	0.1354
31NM,32NM-0630H/L	630mA	●	●	●	●	●	0.1422
31NM,32NM-0750H/L	750mA	●	●	●	●	●	0.1956
31NM,32NM-0800H/L	800mA	●	●	●	●	●	0.2463
31NM,32NM-010H/L	1A	●	●	●	●	●	0.3606
31NM,32NM-012H/L	1.2A	●	●	●	●	●	0.5181
31NM,32NM-013H/L	1.25A	●	●	●	●	●	0.5728
31NM,32NM-015H/L	1.5A	●	●	●	●	●	0.8601
31NM,32NM-016H/L	1.6A	●	●	●	●	●	1.115
31NM,32NM-020H/L	2A	●	●	●	●	●	2.189
31NM,32NM-023H/L	2.25A	●	●	●	●	●	2.463
31NM,32NM-025H/L	2.5A	●	●	●	●	●	1.911
31NM,32NM-030H/L	3A	●	●	●	●	●	3.420
31NM,32NM-032H/L	3.15A	●	●	●	●	●	3.833
31NM,32NM-035H/L	3.5A	●	●	●	●	●	5.155
31NM,32NM-040H/L	4A	●	●	●	●	●	5.891
31NM,32NM-050H/L	5A	●	●	●	●	●	9.401
31NM,32NM-060H/L	6A	●	●	●	●	●	16.34
31NM,32NM-063H/L	6.3A	●	●	●	●	●	20.59
31NM,32NM-070H/L	7A	●	●	●	●	●	26.03
31NM,32NM-080H/L	8A	●	●	●	●	●	30.86
31NM,32NM-090H/L	9A	●	●	●	●	●	46.89
31NM,32NM-100H/L	10A	●	●	●	●	●	59.32
31NM,32NM-120H/L	12A	●	●	●	●	●	92.27
31NM,32NM-150H/L	15A	●	●	●	●	●	243.7


● DENOTES FOR APPROVED ● 表示已取得安全认证
H DENOTES FOR 250V (H 代表 250V), L DENOTES FOR 125V (L 代表 125V)
cUL APPROVAL IS EQUIVALENT TO CSA APPROVAL
cUL 认证同等 CSA 认证使用

Standards/ 标准: UL 248-1, UL 248-14
Operating Temperature/ 工作温度: -55°C ~125°C
Storing Temperature/ 储存温度: -55°C ~85°C
Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.
Solderability/ 可焊性: 245°C ±5°C, 5s±0.5s

ELECTRICAL CHARACTERISTICS/ 电气特性:


% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	60 seconds Max.	最慢 60 秒

Dimensions/ 尺寸:

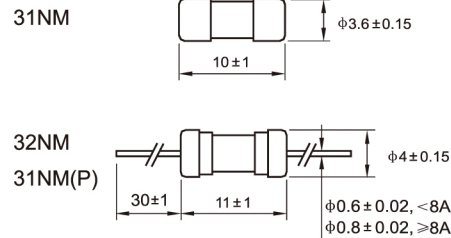

**31NM/32NM AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)**

31NM/32NM 平均 I-T 曲线图 (仅供参考)

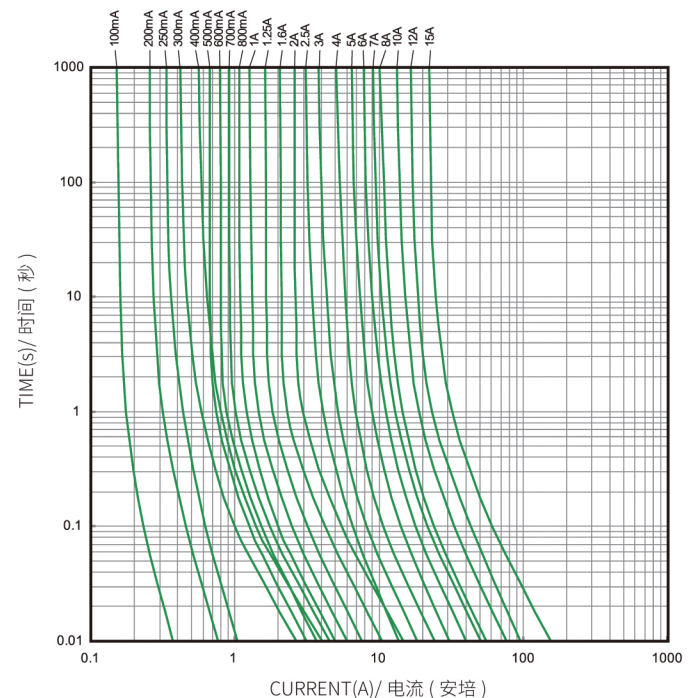

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cartridge Fuses](#) category:

Click to view products by [HOLLY](#) manufacturer:

Other Similar products are found below :

[MBO-20](#) [MDA-V-1/100](#) [12C10X38GI](#) [AGA-V-2-1/2](#) [AGC-V-3-12-R](#) [AGY-50](#) [MSL-3](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#)
[BK1-GMA-200-R](#) [BK1GMA-6-R](#) [BK1/GMC-100-R](#) [BK1/GMC-1.5-R](#) [BK1-GMC-2-5-R](#) [BK1GMD-4-R](#) [BK1S500-250-R](#) [BK1S500-32-R](#)
[BK1-S500-4-R](#) [BK1S500-5-R](#) [BK1-S505-1-R](#) [BK1-S506-2-R](#) [BK1-S506-3-15-R](#) [BK1/S506-63-R](#) [BK/ABC-5RX](#) [BK/AGW-B-4](#) [BK/AVX-](#)
[1/4](#) [BK/C515S-250-R](#) [BK/MBO-20](#) [BK/MBO-8](#) [BK/MDM-3/4](#) [BK-MDQ-4](#) [BK/S505-V-2.5A](#) [BK/TDC120-15](#) [BK/TDC120-20](#)
[BK/TDC122-45](#) [BP/MDL-7](#) [1C10X38AM](#) [S505-V-500MA](#) [SEF-1697-1-002](#) [AGA-V-7-1/2](#) [AGC-15WX](#) [AGC-2-1-2-R](#) [20.0M6.3X32F](#)
[20C8X32GI](#) [GMC-50-R](#) [361.250](#) [MBO-8](#) [TDC121-30](#)