




Φ5.2x20mm IEC STANDARD FUSE RoHS Compliant & Pb-Free
LOW-BREAKING CAPACITY GLASS
TUBE FUSE (TIME-LAG)
低分断能力玻璃保险丝管 (慢断型)

BREAKING CAPACITY/ 分断能力:
35A OR 10In 250V AC WHICHEVER IS GREATER


Dimensions/ 尺寸:

Unit 单位: mm

50T



50T(P)

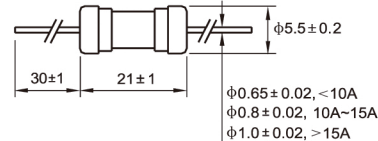

Standards/ 标准: IEC 60127 GB 9364

Operating Temperature/ 工作温度: -55°C ~125°C


Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max

Solderability/ 可焊性: 245°C ±5°C, 5s ±0.5s

50T AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

50T 平均 I-T 曲线图 (仅供参考)

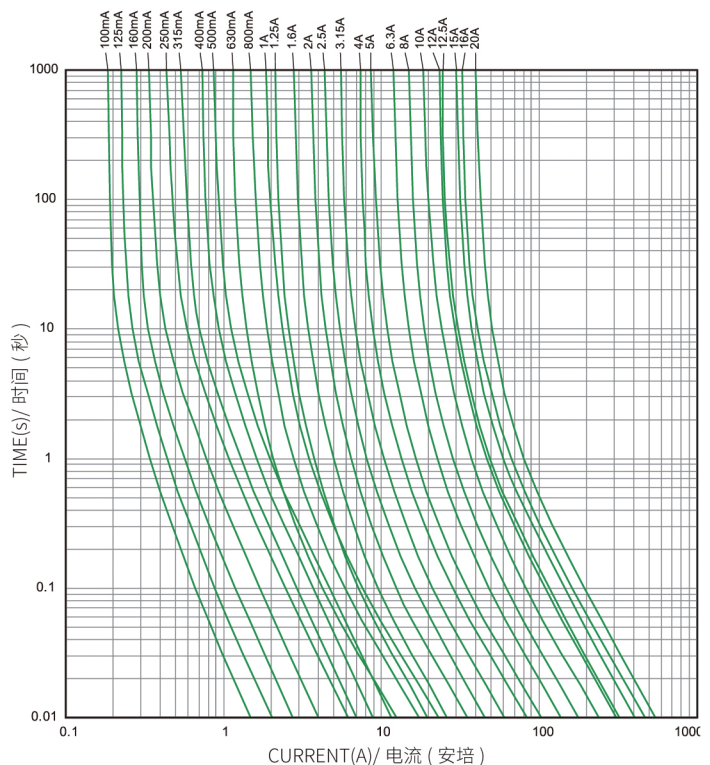

TECHNICAL PARAMETERS/ 技术参数:

| CATALOG NO. 目录编号 | CURRENT RATING 额定电流 | MAX. VOLTAGE DROP 最大电压降 (mv) | SAFETY APPROVALS 安全认证 | | | | | | | | | REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值 | | |
|---------------------|------------------------|---------------------------------|--------------------------|-----|-------|-----|-----|-----|----------|-----|-----|---|----|--------|
| | | | CCC | CQC | SEMKO | VDE | BSI | IMQ | UR (CUR) | CSA | PSE | | KC | |
| 50T-0100H | 100mA | 2500 | ● | | | | | | | | | | | 0.0223 |
| 50T-0125H | 125mA | 2000 | ● | | | | | | | | | | | 0.0417 |
| 50T-0160H | 160mA | 1900 | ● | | | | | | | | | | | 0.0767 |
| 50T-0200H | 200mA | 1500 | ● | | | | | | | | | | | 0.1628 |
| 50T-0250H | 250mA | 1300 | ● | | | | | | | | | | | 0.3808 |
| 50T-0315H | 315mA | 1100 | ● | | | | | | | | | | | 0.4833 |
| 50T-0400H | 400mA | 1000 | ● | | | | | | | | | | | 0.7968 |
| 50T-0500H | 500mA | 900 | ● | | | | | | | | | | | 1.362 |
| 50T-0630H | 630mA | 300 | ● | | | | | | | | | | | 1.583 |
| 50T-0800H | 800mA | 250 | ● | | | | | | | | | | | 3.004 |
| 50T-010H | 1A | 150 | ● | | | | | | | | | | | 5.309 |
| 50T-013H | 1.25A | 150 | ● | | | | | | | | | | | 3.879 |
| 50T-016H | 1.6A | 150 | ● | | | | | | | | | | | 6.890 |
| 50T-020H | 2A | 150 | ● | | | | | | | | | | | 12.33 |
| 50T-025H | 2.5A | 120 | ● | | | | | | | | | | | 20.63 |
| 50T-032H | 3.15A | 100 | ● | | | | | | | | | | | 36.91 |
| 50T-040H | 4A | 100 | ● | | | | | | | | | | | 70.56 |
| 50T-050H | 5A | 100 | ● | | | | | | | | | | | 108.7 |
| 50T-063H | 6.3A | 100 | ● | | | | | | | | | | | 187.8 |
| 50T-080H | 8A | 100 | ● | | | | | | | | | | | 314.9 |
| 50T-100H | 10A | 100 | ● | | | | | | | | | | | 583.4 |
| 50T-120H | 12A | 80 | ● | | | | | | | | | | | 958.9 |
| 50T-125H | 12.5A | 80 | ● | | | | | | | | | | | 1045 |
| 50T-150H | 15A | 80 | ● | | | | | | | | | | | 1668 |
| 50T-160H | 16A | 80 | ● | | | | | | | | | | | 2231 |
| 50T-200H | 20A | 80 | ● | | | | | | | | | | | 3010 |

H DENOTES FOR 250V

H 表示 250V

● DENOTES FOR APPROVED

● 表示已取得安全认证

REAMARK 备注:

50T(P)-160H WITHOUT VDE AND SEMKO APPROVAL

50T(P)-160H 产品无 VDE 和 SEMKO 认证

ELECTRICAL CHARACTERISTICS/ 电气特性:

| RATING 额定 | | BLOWING TIME 熔断时间 | | |
|--------------|---------|-------------------|------------|------------|
| | | 100mA | 125mA-10A | >10A |
| 2.1In | Max. 最慢 | 2 minutes | 2 minutes | 5 minutes |
| | Min. 最快 | 200 ms | 600 ms | 600 ms |
| 2.75In | Max. 最慢 | 10 seconds | 10 seconds | 15 seconds |
| | Min. 最快 | 40 ms | 150 ms | 150 ms |
| 4In | Max. 最慢 | 3 seconds | 3 seconds | 5 seconds |
| | Min. 最快 | 10 ms | 20 ms | 20 ms |
| 10In | Max. 最慢 | 300 ms | 300 ms | 400 ms |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cartridge Fuses](#) category:

Click to view products by [HOLLY](#) manufacturer:

Other Similar products are found below :

[5ST250MA-R](#) [5TT3A-R](#) [5TT8A-R](#) [MBO-20](#) [MDM-4/10](#) [MDQ-V-15/100](#) [MDX-1-6/10](#) [MDX-2](#) [MDX-3-2/10](#) [MDX-6-1/4](#) [FLSR-15](#)
[FLSR-30](#) [FRS-1-1/4](#) [FRS-1-6/10](#) [FRS-4/10](#) [H362003](#) [ABC-2](#) [1/2A](#) [12C10X38GI](#) [AGC-15EX](#) [AGC-V-3-12-R](#) [AGY-50](#) [15019-G](#) [MSL-1-](#)
[1/2](#) [MSL-1-1/4](#) [MSL-1/2](#) [MSL-1/4](#) [MSL-3](#) [MSL-3/4](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#) [BK1-S501-3-15-R](#) [BK1-S505-1-R](#)
[BK1-S506-3-15-R](#) [BK/C515S-250-R](#) [S501-V-10A](#) [301030](#) [303030](#) [FLA10](#) [FLA-4/10](#) [FLNR-5](#) [20.0M6.3X32F](#) [GBB-17-1/2](#) [301001](#) [301020](#)
[311008](#) [31301.5H-XP](#) [313.25](#)