




Φ5.2x20mm IEC STANDARD FUSE RoHS Compliant & Pb-Free
LOW-BREAKING CAPACITY GLASS
TUBE FUSE (TIME-LAG)
低分断能力玻璃保险丝管 (慢断型)

BREAKING CAPACITY/ 分断能力:
35A OR 10In 250V AC WHICHEVER IS GREATER


Dimensions/ 尺寸:

Unit 单位: mm

50T



50T(P)

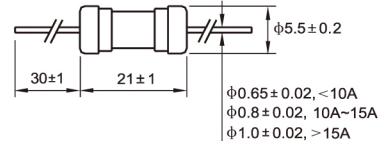

Standards/ 标准: IEC 60127 GB 9364

Operating Temperature/ 工作温度: -55°C ~125°C


Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max

Solderability/ 可焊性: 245°C ±5°C, 5s ±0.5s

50T AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

50T 平均 I-T 曲线图 (仅供参考)

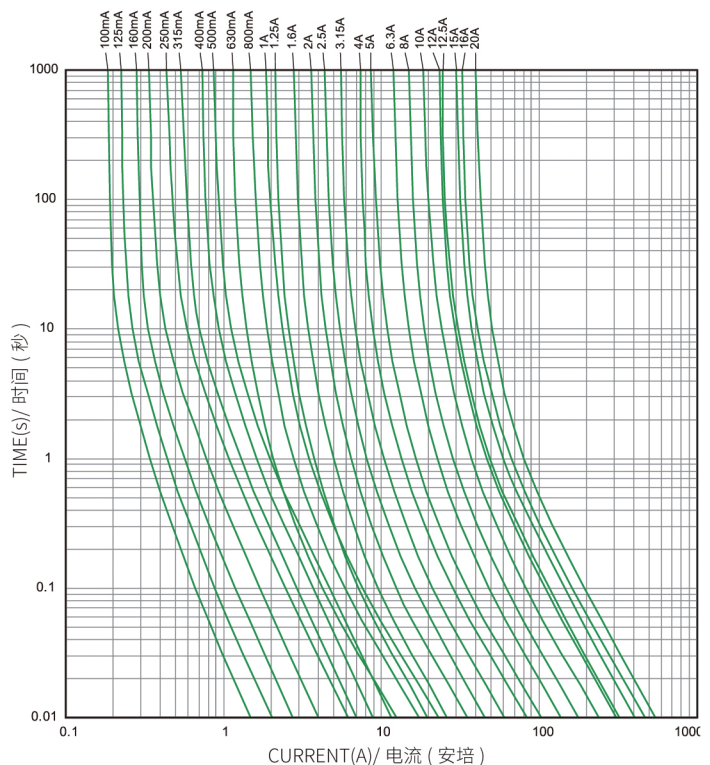

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	MAX. VOLTAGE DROP 最大电压降 (mv)	SAFETY APPROVALS 安全认证									REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值	
			CCC	CQC	SEMKO	VDE	BSI	IMQ	UR (CUR)	CSA	PSE		KC
50T-0100H	100mA	2500	●										0.0223
50T-0125H	125mA	2000	●										0.0417
50T-0160H	160mA	1900	●	●	●	●	●	●	●	●	●	●	0.0767
50T-0200H	200mA	1500	●	●	●	●	●	●	●	●	●	●	0.1628
50T-0250H	250mA	1300	●	●	●	●	●	●	●	●	●	●	0.3808
50T-0315H	315mA	1100	●	●	●	●	●	●	●	●	●	●	0.4833
50T-0400H	400mA	1000	●	●	●	●	●	●	●	●	●	●	0.7968
50T-0500H	500mA	900	●	●	●	●	●	●	●	●	●	●	1.362
50T-0630H	630mA	300	●	●	●	●	●	●	●	●	●	●	1.583
50T-0800H	800mA	250	●	●	●	●	●	●	●	●	●	●	3.004
50T-010H	1A	150	●	●	●	●	●	●	●	●	●	●	5.309
50T-013H	1.25A	150	●	●	●	●	●	●	●	●	●	●	3.879
50T-016H	1.6A	150	●	●	●	●	●	●	●	●	●	●	6.890
50T-020H	2A	150	●	●	●	●	●	●	●	●	●	●	12.33
50T-025H	2.5A	120	●	●	●	●	●	●	●	●	●	●	20.63
50T-032H	3.15A	100	●	●	●	●	●	●	●	●	●	●	36.91
50T-040H	4A	100	●	●	●	●	●	●	●	●	●	●	70.56
50T-050H	5A	100	●	●	●	●	●	●	●	●	●	●	108.7
50T-063H	6.3A	100	●	●	●	●	●	●	●	●	●	●	187.8
50T-080H	8A	100	●	●	●	●	●	●	●	●	●	●	314.9
50T-100H	10A	100	●	●	●	●	●	●	●	●	●	●	583.4
50T-120H	12A	80	●	●	●	●	●	●	●	●	●	●	958.9
50T-125H	12.5A	80	●	●	●	●	●	●	●	●	●	●	1045
50T-150H	15A	80	●	●	●	●	●	●	●	●	●	●	1668
50T-160H	16A	80	●	●	●	●	●	●	●	●	●	●	2231
50T-200H	20A	80	●	●	●	●	●	●	●	●	●	●	3010

H DENOTES FOR 250V

H 表示 250V

● DENOTES FOR APPROVED

● 表示已取得安全认证

REAMARK 备注:

50T(P)-160H WITHOUT VDE AND SEMKO APPROVAL

50T(P)-160H 产品无 VDE 和 SEMKO 认证

ELECTRICAL CHARACTERISTICS/ 电气特性:

RATING 额定		BLOWING TIME 熔断时间		
		100mA	125mA-10A	>10A
2.1In	Max. 最慢	2 minutes	2 minutes	5 minutes
	Min. 最快	200 ms	600 ms	600 ms
2.75In	Max. 最慢	10 seconds	10 seconds	15 seconds
	Min. 最快	40 ms	150 ms	150 ms
4In	Max. 最慢	3 seconds	3 seconds	5 seconds
	Min. 最快	10 ms	20 ms	20 ms
10In	Max. 最慢	300 ms	300 ms	400 ms

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cartridge Fuses](#) category:

Click to view products by [HOLLY](#) manufacturer:

Other Similar products are found below :

[5ST250MA-R](#) [5TT3A-R](#) [5TT8A-R](#) [MBO-20](#) [MDM-4/10](#) [MDQ-V-15/100](#) [MDX-1-6/10](#) [MDX-2](#) [MDX-3-2/10](#) [MDX-6-1/4](#) [FLSR-15](#)
[FLSR-30](#) [FRS-1-1/4](#) [FRS-1-6/10](#) [FRS-4/10](#) [H362003](#) [ABC-2](#) [1/2A](#) [12C10X38GI](#) [AGC-15EX](#) [AGC-V-3-12-R](#) [AGY-50](#) [15019-G](#) [MSL-1-1/2](#) [MSL-1-1/4](#) [MSL-1/2](#) [MSL-1/4](#) [MSL-3](#) [MSL-3/4](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#) [BK1-S501-3-15-R](#) [BK1-S506-3-15-R](#) [BK/C515S-250-R](#) [1C10X38AM](#) [S501-V-10A](#) [301030](#) [303030](#) [FLA10](#) [FLA-4/10](#) [FLNR-5](#) [20.0M6.3X32F](#) [301001](#) [301020](#) [311008](#)
[31301.5H-XP](#) [313.25](#) [313.75](#)