




Your Power Safeguard™
您的电路安全卫士

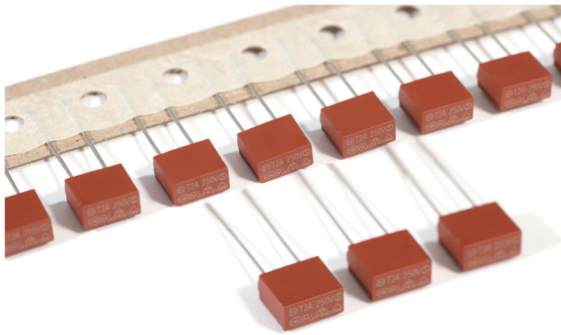

8x8.5x4mm, RoHS Compliant & Pb-Free
RADIAL LEAD MICROFUSE (TIME-LAG)
径向引线式保险丝管 (慢断型)

PATENT NO. 专利号 :ZL 200620053742.1

TECHNICAL PARAMETERS/ 技术参数 :

CATALOG NO. 目录编号	CURRENT RATING 额定电流	Max. VOLTAGE DROP (mV) 最大电压降	SAFETY APPROVALS 安全认证										REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值		
			CQC	SEMKO	VDE	cURus	BSI	PSE	KC	TUV	H ₁	H		L	
5ET-0100H ₁ /H/L	100mA	350	●	●	●	●	●	●	●	●	●	●	●	●	0.02623
5ET-0125H ₁ /H/L	125mA	300	●	●	●	●	●	●	●	●	●	●	●	●	0.04499
5ET-0160H ₁ /H/L	160mA	280	●	●	●	●	●	●	●	●	●	●	●	●	0.08755
5ET-0200H ₁ /H/L	200mA	260	●	●	●	●	●	●	●	●	●	●	●	●	0.1181
5ET-0250H ₁ /H/L	250mA	240	●	●	●	●	●	●	●	●	●	●	●	●	0.2030
5ET-0315H ₁ /H/L	315mA	220	●	●	●	●	●	●	●	●	●	●	●	●	0.3597
5ET-0400H ₁ /H/L	400mA	200	●	●	●	●	●	●	●	●	●	●	●	●	0.6893
5ET-0500H ₁ /H/L	500mA	190	●	●	●	●	●	●	●	●	●	●	●	●	1.232
5ET-0630H ₁ /H/L	630mA	180	●	●	●	●	●	●	●	●	●	●	●	●	2.185
5ET-0800H ₁ /H/L	800mA	160	●	●	●	●	●	●	●	●	●	●	●	●	2.987
5ET-010H ₁ /H/L	1A	140	●	●	●	●	●	●	●	●	●	●	●	●	6.619
5ET-013H ₁ /H/L	1.25A	130	●	●	●	●	●	●	●	●	●	●	●	●	12.23
5ET-016H ₁ /H/L	1.6A	120	●	●	●	●	●	●	●	●	●	●	●	●	22.03
5ET-020H ₁ /H/L	2A	100	●	●	●	●	●	●	●	●	●	●	●	●	43.08
5ET-025H ₁ /H/L	2.5A	100	●	●	●	●	●	●	●	●	●	●	●	●	50.05
5ET-032H ₁ /H/L	3.15A	100	●	●	●	●	●	●	●	●	●	●	●	●	73.53
5ET-040H ₁ /H/L	4A	100	●	●	●	●	●	●	●	●	●	●	●	●	88.16
5ET-050H ₁ /H/L	5A	100	●	●	●	●	●	●	●	●	●	●	●	●	152.0
5ET-063H ₁ /H/L	6.3A	100	●	●	●	●	●	●	●	●	●	●	●	●	255.7
5ET-080H ₁ /H/L	8A	100	●	●	●	●	●	●	●	●	●	●	●	●	305.7
5ET-100H ₁ /H/L	10A	100	●	●	●	●	●	●	●	●	●	●	●	●	439.2


● DENOTES FOR APPROVED ● 表示已取得安全认证
H₁ DENOTES FOR 300V (H₁ 代表 300V) H DENOTES FOR 250V (H 代表 250V)
L DENOTES FOR 125V (L 代表 125V)

ELECTRICAL CHARACTERISTICS/ 电气特性 :

RATING 额定	BLOWING TIME 熔断时间
2.1In	Max. 最慢 2 minutes
2.75In	Min. 最快 400 ms
	Max. 最慢 10 seconds
4In	Min. 最快 150 ms
	Max. 最慢 3 seconds
10In	Min. 最快 20 ms
	Max. 最慢 150 ms

PACKING/ 包装:

1. INNER BOX/ 内盒 : AMMO PACK




Unit 单位: mm

2. OUTER CARTON/ 外箱 : 10 INNER BOXES / CARTON
CARTON SIZE / 尺寸 : L440x W348 x H205(mm)

BREAKING CAPACITY / 分断能力:


CQC / SEMKO / VDE / BSI / KTL:
35A OR 10In 250V AC WHICHEVER IS GREATER
VDE: 35A OR 10In 300V AC WHICHEVER IS GREATER(1A-6.3A)
CQC: 35A OR 10In 300V AC WHICHEVER IS GREATER (100mA-6.3A)
PSE: 100A 250V AC
cURus: 50A 300V AC, 50A 125V DC, 130A 250V AC (0.315A-10A)
TUV: 130A 250V AC (315mA-10A)

Dimensions/ 尺寸:
散装规格: 5ET-XXXHB



TAPING SPECIFICATIONS / 编带规格 :5ET-XXXHA


MATERIALS: THERMOPLASTIC, UL94-V0
主体材料: 阻燃塑料, UL94-V0

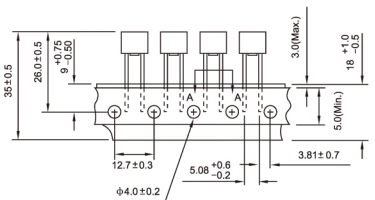

Standards/ 标准: IEC 60127, GB 9364

Operating Temperature/ 工作温度: -55°C ~125°C
Storing Temperature/ 储存温度: -55°C ~85°C
Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.
Solderability/ 可焊性: 245°C ±5°C, 5s ±0.5s

5ET AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)
5ET 平均 I-T 曲线图 (仅供参考)

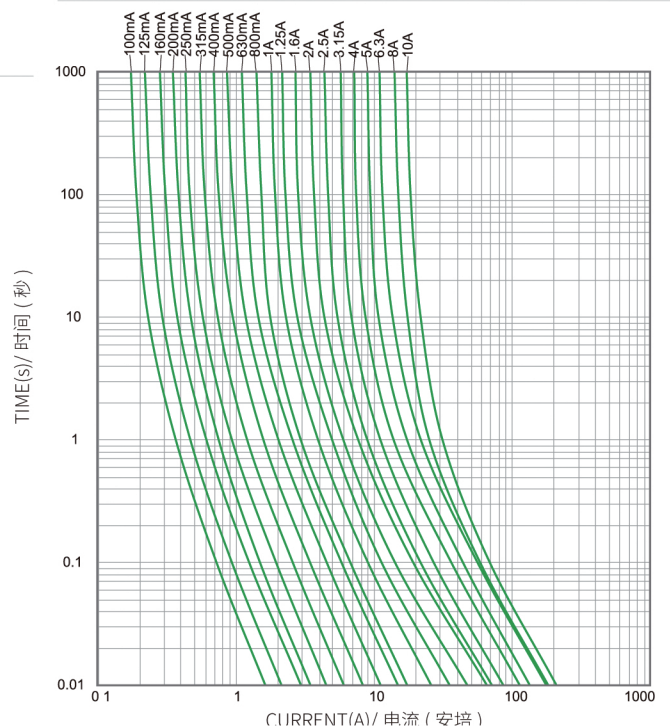

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [HOLLY](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [NFVC6125S0R50TRF](#) [TF16SN2.00TTD](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#) [0308001.UR](#)
[FCC16202ABTP](#) [F0603G0R03FNTR](#) [7010.9962.63](#) [SEF 12A 65V \(G\)](#) [MST 250mA 250V](#) [TB60](#) [06 100.4](#) [TBF50](#) [TBF40](#)
[2010T315mA250V](#) [06 110.7](#) [12 100.1.5](#) [06 110.5](#) [1206FA-R250](#) [R06.100.6](#) [R12.100.15](#) [R06.000.0.375](#) [R06.000.6](#) [R06.100.0.25](#) [R12.000.8](#)
[R06.000.0.5](#) [R06.000.0.75](#) [R06.000.8](#) [R06.100.0.75](#) [R06.100.8](#) [R06.100.0.375](#) [R06.100.0.5](#) [R06.000.7](#) [R06.100.7](#) [S0603-S-2.0A](#) [F06F3.5](#)
[F12F20](#) [TA3VT2](#) [F12F1](#) [F06F7](#) [F06T3.5](#) [F06F0.375](#) [F06T8](#) [F12F30](#) [4T2A250V](#) [R12.100.7](#) [R12.100.30](#) [R06.000.0.25](#)