



**TECHNICAL PARAMETERS/ 技术参数:**

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证												REFERENCE (A°.Sec.) (RoHS) I'T 参考值		
		UL(cUL)				UR(cUR)				PSE		KC				
		H1	H	L	L1	H1	H	L	L1	H	L	H	L			
65NM-0300H/L	300mA														●	0.0149
65NM-0315H/L	315mA														●	0.0169
65NM-0350H/L	350mA														●	0.0227
65NM-0375H/L	375mA														●	0.0272
65NM-0400H/L	400mA														●	0.0339
65NM-0500H/L	500mA	●	●	●											●	0.0716
65NM-0600H/L	600mA	●	●	●											●	0.1068
65NM-0630H/L	630mA	●	●	●											●	0.1162
65NM-0750H/L	750mA	●	●	●											●	0.2233
65NM-0800H/L	800mA	●	●	●											●	0.2871
65NM-010H/L	1A	●	●	●						●	●	●			●	0.5843
65NM-012H/L	1.2A	●	●	●						●	●	●			●	0.6298
65NM-013H/L	1.25A	●	●	●						●	●	●			●	0.7173
65NM-015H/L	1.5A	●	●	●						●	●	●			●	1.7168
65NM-016H/L	1.6A	●	●	●						●	●	●			●	2.011
65NM-020H/L	2A	●	●	●						●	●	●			●	1.712
65NM-025H/L/L1	2.5A	●	●	●	●					●	●	●			●	3.232
65NM-030H/L/L1	3A	●	●	●	●					●	●	●			●	5.032
65NM-032H/L/L1	3.15A	●	●	●	●					●	●	●			●	5.573
65NM-035H/L/L1	3.5A	●	●	●	●					●	●	●			●	8.111
65NM-040H/L/L1	4A	●	●	●	●					●	●	●			●	12.78
65NM-050H/L/L1	5A	●	●	●	●					●	●	●			●	25.64
65NM-060H/L/L1	6A	●	●	●	●					●	●	●			●	50.61
65NM-070H/L/L1	7A	●	●	●	●					●	●	●			●	84.09
65NM-080H/L/L1	8A	●	●	●	●					●	●	●			●	120.4
65NM-090H/L/L1	9A	●	●	●	●					●	●	●			●	167.1
65NM-100H/L/L1	10A	●	●	●	●					●	●	●			●	234.1
65NM-120H/L/L1	12A	●	●	●	●					●	●	●			●	467.2
65NM-150H/L/L1	15A	●	●	●	●					●	●	●			●	720.1
65NM-200H/L/L1	20A					●	●	●	●	●	●	●			●	2008
65NM-250H/L/L1	25A					●	●	●	●	●	●	●			●	3061
65NM-300H/L/L1	30A					●	●	●	●	●	●	●			●	6205

● DENOTES FOR APPROVED      ● 表示已取得安全认证  
**H1 DENOTES FOR 300V AC (H1 代表 300V AC)**  
**H DENOTES FOR 250V (H 代表 250V), L DENOTES FOR 125V AC (L 代表 125V AC)**  
**L1 DENOTES FOR 125V DC (L1 代表 125V DC)**

**ELECTRICAL CHARACTERISTICS/ 电气特性:**

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
135%	1 hour Max.	最慢 1 小时
200%	120 seconds Max.	最慢 120 秒

**Standards/ 标准: UL 248-1, UL 248-14**  
**Operating Temperature/ 工作温度: -55°C ~125°C**  
**Storing Temperature/ 储存温度: -55°C ~85°C**  
**Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.**  
**Solderability/ 可焊性: 245°C ±5°C, 5s±0.5s**




Φ6.35x32mm, RoHS Compliant & Pb-Free  
**CERAMIC TUBE FUSE (FAST-BLOW)**  
**瓷保险丝管 (速断型)**

**INTERRUPTING CAPACITY / 分断能力:**


10,000 amperes at 125V AC (500mA-15A)  
 35 amperes at 250V AC (500mA-1A)  
 100 amperes at 250V AC (1.2A-3.5A)  
 200 amperes at 250V AC (4A-10A)  
 750 amperes at 250V AC (12A-15A)  
 100 amperes at 125V AC (20A-30A)  
 100 amperes at 250V AC (20A-30A)  
 1000 amperes at 300V AC (20A-30A) UR/cUR  
 1000 amperes at 300V AC (0.5A-15A) UL/cUL  
 500 amperes at 125V AC (1A-15A) PSE  
 100 amperes at 250V AC (1A-30A) PSE  
 100 amperes at 250V AC (300mA-3A) KC  
 100 amperes at 250V AC (4A-10A) KC  
 10,000 amperes at 125V DC (2.5A-15A) UL/cUL  
 400 amperes at 125V DC (20A-30A) UR/cUR

**Dimensions/ 尺寸:**

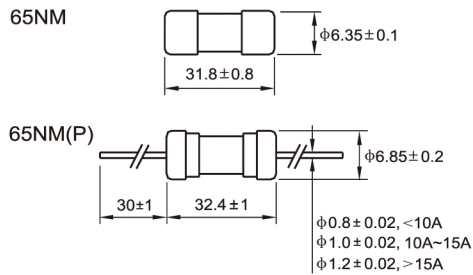

**65NM AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)**

**65NM 平均 I-T 曲线图 (仅供参考)**

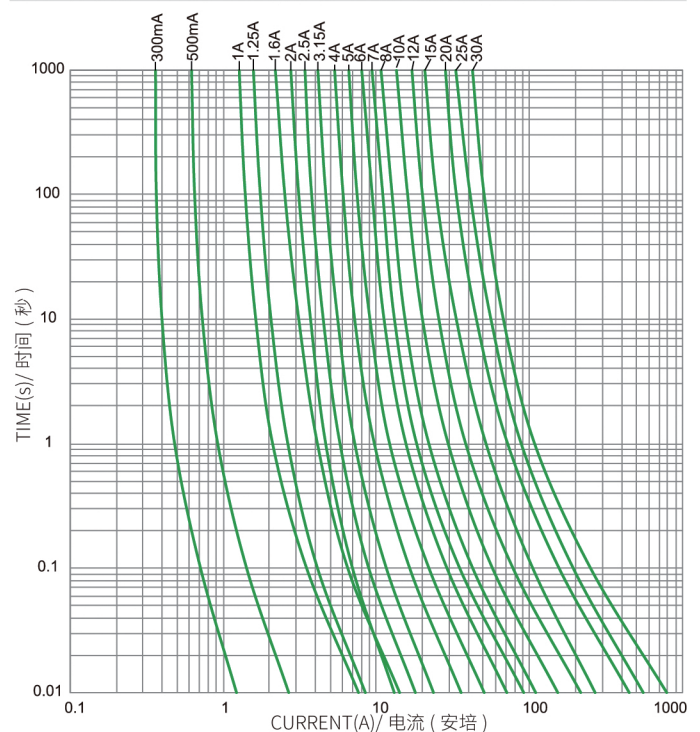

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Cartridge Fuses](#) category:*

*Click to view products by [HOLLY](#) manufacturer:*

Other Similar products are found below :

[5ST250MA-R](#) [5TT3A-R](#) [5TT8A-R](#) [MBO-20](#) [MDM-4/10](#) [MDQ-V-15/100](#) [MDX-1-6/10](#) [MDX-2](#) [MDX-3-2/10](#) [MDX-6-1/4](#) [FLSR-15](#)  
[FLSR-30](#) [FRS-1-1/4](#) [FRS-1-6/10](#) [FRS-4/10](#) [H362003](#) [ABC-2](#) [1/2A](#) [12C10X38GI](#) [AGC-15EX](#) [AGC-V-3-12-R](#) [AGY-50](#) [15019-G](#) [MSL-1-](#)  
[1/2](#) [MSL-1-1/4](#) [MSL-1/2](#) [MSL-1/4](#) [MSL-3](#) [MSL-3/4](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#) [BK1-S505-1-R](#) [BK1-S506-3-15-R](#)  
[BK/C515S-250-R](#) [S501-V-10A](#) [301030](#) [303030](#) [FLA10](#) [FLA-4/10](#) [FLNR-5](#) [20.0M6.3X32F](#) [GBB-17-1/2](#) [301001](#) [301020](#) [311008](#)  
[31301.5H-XP](#) [313.25](#) [313.75](#)