




Your Power Safeguard™
您的电路安全卫士

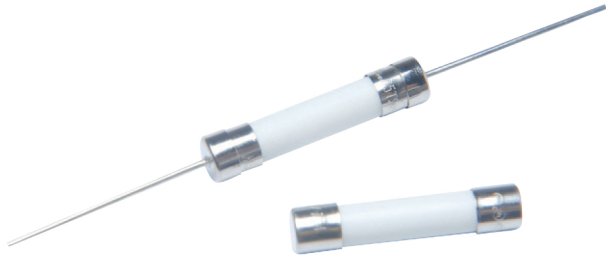

Φ6.35x32mm, RoHS Compliant & Pb-Free
CERAMIC TUBE FUSE (SLOW-BLOW)
瓷保险丝管 (慢断型)

TECHNICAL PARAMETERS/ 技术参数 :

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证										REFERENCE (A²·Sec.) (RoHS) I ² T 参考值
		UL(cUL)		UR(cUR)		PSE		KC		TÜV		
		H	L	H	L	H	L	H	H	L		
65TS-0500H/L	500mA	●	●					●				
65TS-0600H/L	600mA	●	●					●				
65TS-0630H/L	630mA	●	●					●				
65TS-0750H/L	750mA	●	●					●				
65TS-0800H/L	800mA	●	●					●				
65TS-010H/L	1A	●	●			●	●	●				0.5117
65TS-012H/L	1.2A	●	●			●	●	●				0.4802
65TS-013H/L	1.25A	●	●			●	●	●				0.5002
65TS-015H/L	1.5A	●	●			●	●	●				0.7983
65TS-016H/L	1.6A	●	●			●	●	●				1.521
65TS-020H/L	2A	●	●			●	●	●				2.342
65TS-025H/L	2.5A	●	●			●	●	●				4.545
65TS-030H/L	3A	●	●			●	●	●	●	●	●	4.987
65TS-032H/L	3.15A	●	●			●	●	●	●	●	●	5.246
65TS-035H/L	3.5A	●	●			●	●	●	●	●	●	8.456
65TS-040H/L	4A	●	●			●	●	●	●	●	●	12.47
65TS-050H/L	5A	●	●			●	●	●	●	●	●	26.52
65TS-060H/L	6A	●	●			●	●	●	●	●	●	49.68
65TS-070H/L	7A	●	●			●	●	●	●	●	●	70.47
65TS-080H/L	8A	●	●			●	●	●	●	●	●	108.5
65TS-100H/L	10A	●	●			●	●	●	●	●	●	238.8
65TS-120H/L	12A	●	●			●	●	●	●	●	●	434.6
65TS-130H/L	13A	●	●			●	●	●	●	●	●	531.2
65TS-150H/L	15A	●	●			●	●	●	●	●	●	720.1
65TS-200H/L	20A		●	●	●	●	●	●	●	●	●	2008
65TS-250H/L	25A		●	●	●	●	●	●	●	●	●	3511
65TS-300H/L	30A		●	●	●	●	●	●	●	●	●	6658

● DENOTES FOR APPROVED

● 表示已取得安全认证

H DENOTES FOR 250V (H 代表 250V), L DENOTES FOR 125V (L 代表 125V)

备注: 65TS-300H/L 的 UR/cUR 认证仅为引线产品

REMARK: UR/cUR APPROVALS OF 65TS-300H/L ONLY FOR PIGTAIL TYPE

ELECTRICAL CHARACTERISTICS/ 电气特性 :

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
135%	1 hour Max.	最慢 1 小时
200%	120 seconds Max.	最慢 120 秒

Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 245°C ±5°C, 5s ±0.5s

BREAKING CAPACITY / 分断能力:

10,000 amperes at 125V AC (500mA-15A)

35 amperes at 250V AC (500mA-1A)

100 amperes at 250V AC (1.2A-3.5A)

200 amperes at 250V AC (4A-10A)

750 amperes at 250V AC (12A-15A)

400 amperes at 125V AC (20A-30A)

100 amperes at 250V AC (20A-30A)


500 amperes at 125V AC (1A-15A) PSE

100 amperes at 250V AC (1A-30A) PSE


100 amperes at 250V AC (500mA-10A) KC

Dimensions/ 尺寸 :

65TS




65TS(P)

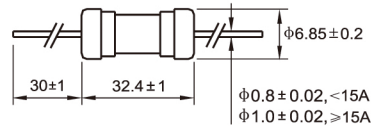

65TS AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

65TS 平均 I-T 曲线图 (仅供参考)

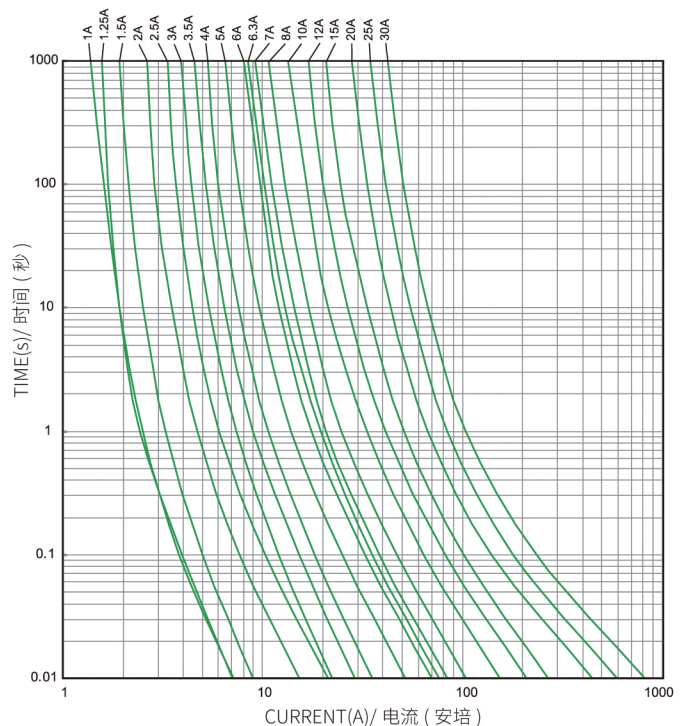

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cartridge Fuses](#) category:

Click to view products by [HOLLY](#) manufacturer:

Other Similar products are found below :

[5ST250MA-R](#) [5TT3A-R](#) [5TT8A-R](#) [MBO-20](#) [MDM-4/10](#) [MDQ-V-15/100](#) [MDX-1-6/10](#) [MDX-2](#) [MDX-3-2/10](#) [MDX-6-1/4](#) [FLSR-15](#)
[FLSR-30](#) [FRS-1-1/4](#) [FRS-1-6/10](#) [FRS-4/10](#) [H362003](#) [ABC-2](#) [1/2A](#) [12C10X38GI](#) [AGC-15EX](#) [AGC-V-3-12-R](#) [AGY-50](#) [15019-G](#) [MSL-1-](#)
[1/2](#) [MSL-1-1/4](#) [MSL-1/2](#) [MSL-1/4](#) [MSL-3](#) [MSL-3/4](#) [MSL-4](#) [MSL-5](#) [BK1/C436-2A](#) [BK1-GMA-1-6-R](#) [BK1-S501-3-15-R](#) [BK/C515S-250-R](#)
[1C10X38AM](#) [S501-V-10A](#) [301030](#) [303030](#) [FLA10](#) [FLA-4/10](#) [FLNR-5](#) [20.0M6.3X32F](#) [301001](#) [301020](#) [311008](#) [31301.5H-XP](#) [313.25](#)
[313.75](#) [334006](#)