


# Proximity Sensors

100FW Series

## Severe Environment Proximity Sensors 3-Wire DC All-Metals Sensitive Type

### FEATURES

- All-metals sensitive
- Designed for aircraft, ordnance, marine, mass transit, high performance industrial equipment
- Stainless steel housing, thick wall construction for effective shielding
- Leadwire or connector termination
- Factory Mutual certified for Class I, Division 2, Groups A, B, C, D
- Circuit protection against: Transients, MIL-STD-704 EMI, MIL-STD-461 False pulse Load shorts Reverse voltage 400 Hz interference



### ORDER GUIDE

Sensor Package Style	Sensing Range mm (in.)	Sensor Type	LED	Sw. Freq.*	Standard Target** mm (in.)	Output Type	Termination	Catalog Listing
5/8-24 UNEF Thread	2,41 ± 0,51 (.095 ± .02) Shielded	3-wire DC	NO	500 Hz	15,9 dia. x 1,59 (.625 x .062)	NPN, N.O.	Connector Leadwires	112FW12-R1 112FW12-4
5/8-24 UNEF Thread	5,84 ± 0,76 (.230 ± .03) Unshielded	3-wire DC	NO	500 Hz	15,9 dia. x 1,59 (.625 x .062)	NPN, N.O.	Leadwires	122FW12-4


\*Varies with application details (target size, distance, etc); should be evaluated for each installation design.  
\*\*SAE 1018 steel target.

### SPECIFICATIONS

Sensor Type	3-wire DC
Supply Voltage	18-32 VDC
Load Current	120 mA, 50 mA Lamp
Leakage Current, max.	10 μA
Voltage Drop, max.	1 V
Current Consumption, max.	20 mA
Inrush Current	—
Repeatability	± 1%
Hysteresis	0,13 mm (.005 in.)
Temperature Range	-54 to +125°C (-65 to +257°F)
Sensing Face Material	High temperature phenolic
Housing Material	Stainless Steel

### MOUNTING DIMENSIONS

(For reference only)

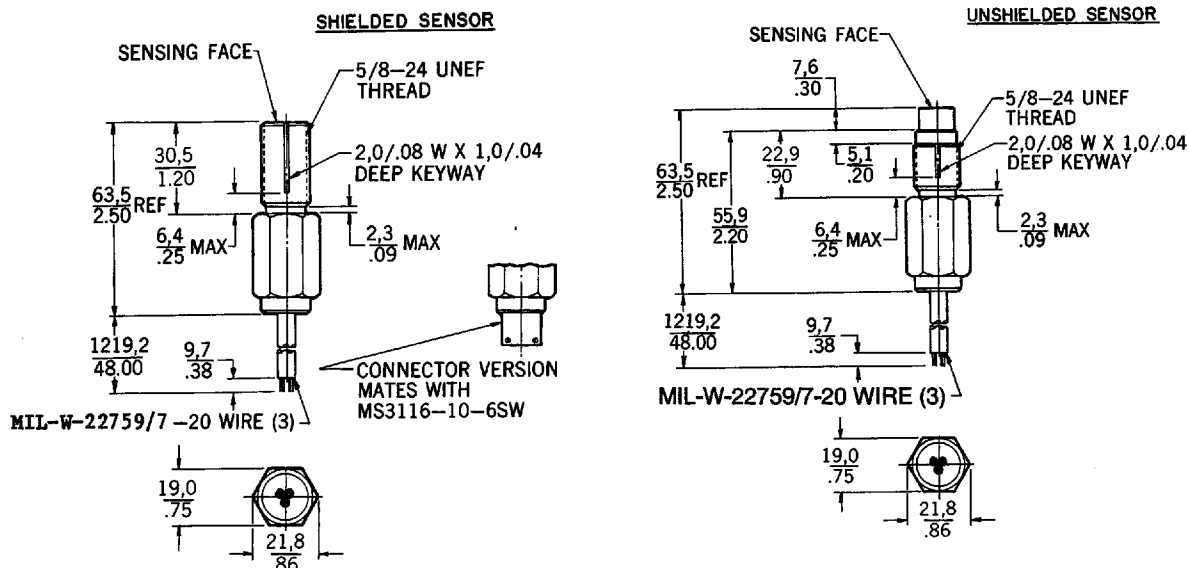

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Proximity Sensors](#) category:*

*Click to view products by [Honeywell](#) manufacturer:*

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [8027AL20NL2CPXX](#) [FYCC8E1-2](#)  
[9221350022](#) [922AA2W-A9P-L](#) [PLS2](#) [GL-12F-C2.5X10\(LOT3\)](#) [972AB2XM-A3N-L](#) [972AB3XM-A3P-L](#) [PS3251](#) [980659-1](#) [QT-12](#) [E2E2-](#)  
[X5M41-M4](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2EX3D1SM1N](#) [E2E-X4MD1-G](#) [E2E-X5E1-5M-N](#) [E2E-X5Y2-N](#) [E2E-X7D1-](#)  
[M1J-T-0.3M-N](#) [E2FMX1R5D12M](#) [E2K-F10MC1](#) [5M](#) [EH-302](#) [EI3010TBOP](#) [EI5515NPAP](#) [MS605AU](#) [EP175-32000](#) [BSA-08-25-08](#)  
[IFRM04N35B1/L](#) [IFRM04P1513/S35L](#) [IFRM06P1703/S35L](#) [IFRM08P1501/S35L](#) [IFRM12N17G3/L](#) [IFRM12P17G3/L](#) [IFRM12P3502/L](#)  
[IFRM12P37G1/S14L](#) [ILFK12E9189/I02](#) [ILFK12E9193/I02](#) [IMM2582C](#) [OISN-013](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#)