


HONEYWELL
PART NUMBER
64AT34 SERIES CHART 2

REV	DOCUMENT	CHANGED BY	CHECK
8	0018728	LKM 17FEB06	VA

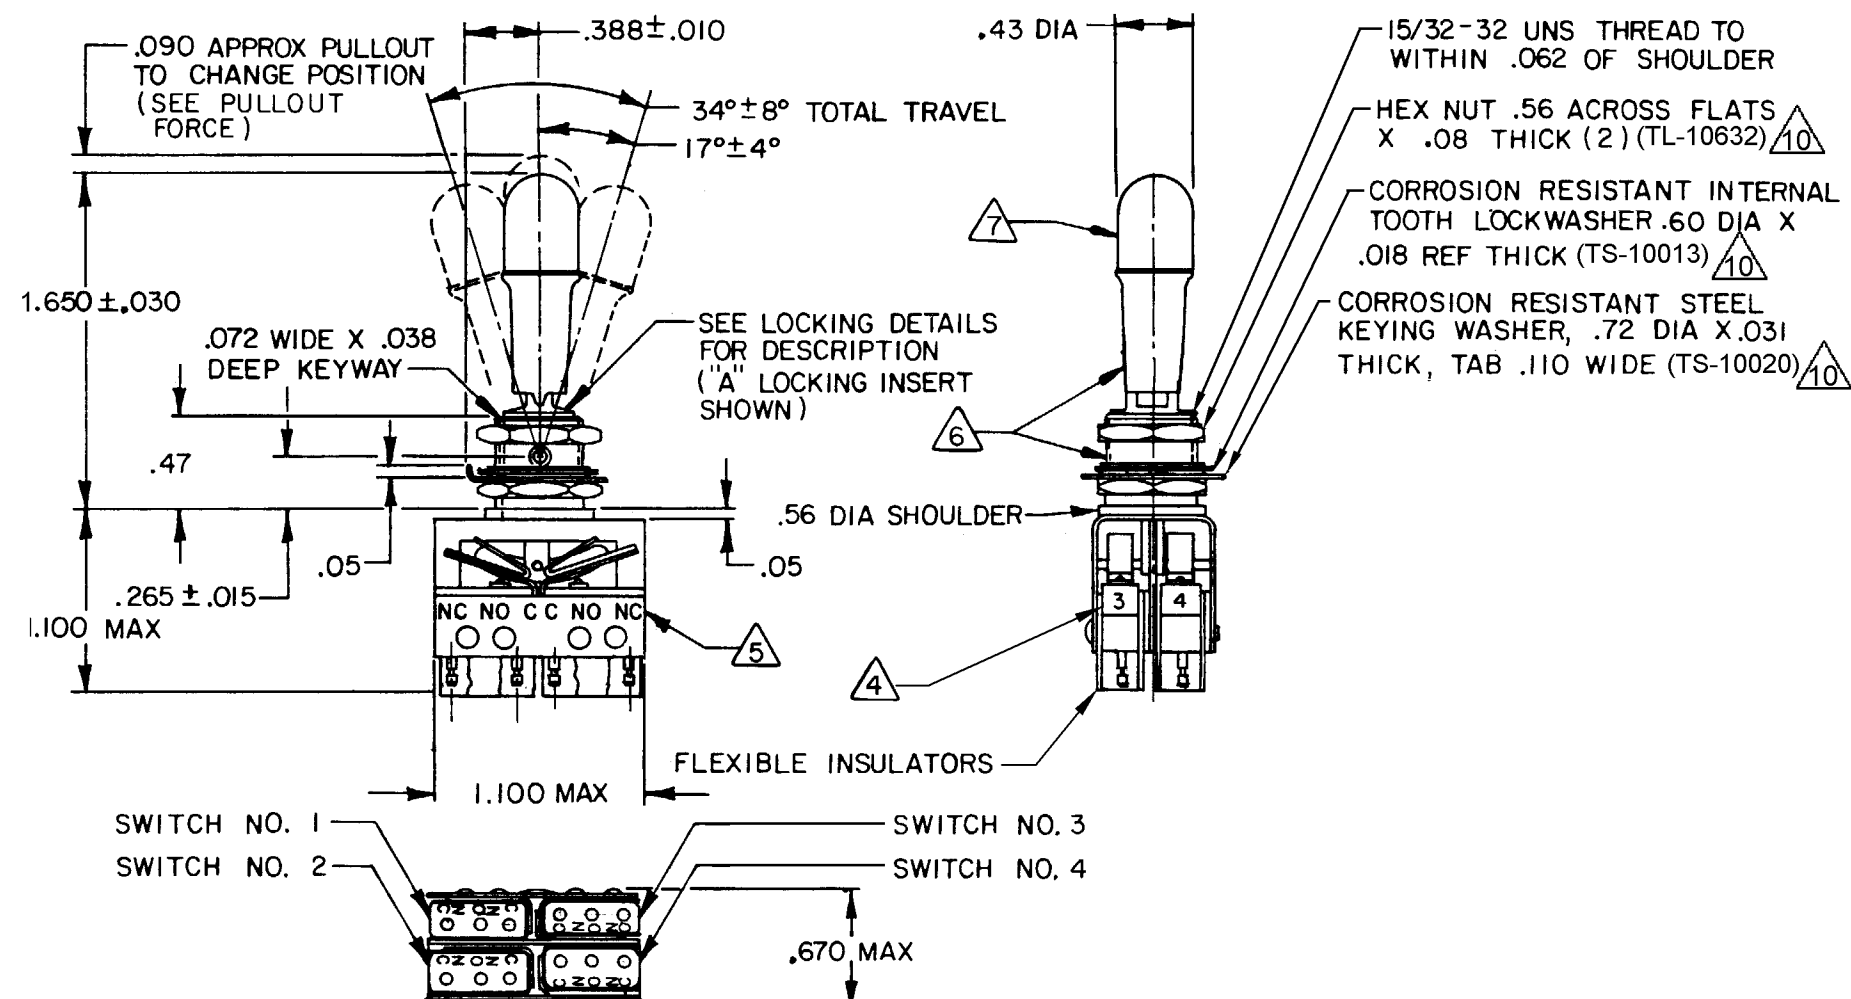

CATALOG LISTING	KEYWAY POSITION		CENTER POSITION		OPPOSITE KEYWAY POSITION		RECOMMENDED LOCKING COMBINATIONS
	C-NC	C-NO	C-NC	C-NO	C-NC	C-NO	
64AT34-1	1,2	3,4	ALL	NONE	3,4	1,2	A,B,D,E,F,G,H J,K,L,M,N,P
64AT34-3	1,2	3,4	NONE	NONE	3,4	1,2	D,F,G
64AT34-5	1,2*	3,4*	ALL	NONE	3,4	1,2	E,F,K,L,M,N
64AT34-7	1,2*	3,4*	ALL	NONE	3,4*	1,2*	E,L,N
64AT34-514	1,2	3,4	ALL	NONE	3,4*	1,2*	B,E,G,L,N,P

* ASTERISK DENOTES MOMENTARY POSITION

CAT. LISTING	"A"	"B"	"D"	"E"
64AT34-1A				
64AT34-1B				
64AT34-1D				
64AT34-1E				
64AT34-1F				
64AT34-1G				
64AT34-1H				
64AT34-1J				
64AT34-1K				
64AT34-1L				
64AT34-1M				
64AT34-1N				
64AT34-1P				
64AT34-3D FAA-PMA				
64AT34-3F				
64AT34-3G				
64AT34-5E				
64AT34-5F				
64AT34-5K				
64AT34-5L				
64AT34-5M				
64AT34-5N				
64AT34-7E				
64AT34-7L				
64AT34-7N				
64AT34-514B				
64AT34-514E				
64AT34-514G				
64AT34-514L				
64AT34-514N				
64AT34-514P				

NOTES

- 1 - UNIT INCLUDES "23SX" TYPE (GOLD CONTACT) BASIC SWITCH (4) (MEETS REQUIREMENTS OF MIL-PRF-8805)
- 2 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 3 - PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES
- 4 - SWITCH NUMBERS STAMPED ON END OF BASIC SWITCHES
- 5 - TERMINAL DESIGNATION STAMPED ON BOTH SIDES OF UNIT
- 6 - DULL FINISH ON LEVER AND BUSHING
- 7 - FLAT WHITE RESILIENT SILICONE (50 DUROMETER APPROX)
- 8 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING (SEE CHART FOR RECOMMENDED LOCKING COMBINATIONS)
- 9 - FOR REPLACEMENT BUTTON SEE MICRO SWITCH CAT. LIST. 15PA90-6W
- 10 - HARDWARE FURNISHED ASSEMBLED WITH SWITCH OR IN PACKET 15PA313-AT PER MIL-PRF-8805
- 11 - REPLACEMENT MOUNTING HARDWARE PACKET 15PA313-AT
- 12 - FOR MANUFACTURING DETAIL SEE THE CORRESPONDING ASSEMBLY DRAWING FOR EACH LISTING FOR FAA-PMA.

CHARACTERISTICS	ELECTRICAL DATA
PULLOUT FORCE --- 3 LB MIN - 5 LB MAX	CONTACT ARRANGEMENT S P D T (4)
	30 VOLTS DC RATING
	INDUCTIVE --- SEA LEVEL --- 1/2 AMP 50,000 FT --- 1/2 AMP
	RESISTIVE --- SEA LEVEL --- 1 AMP 50,000 FT --- 1 AMP
	MAXIMUM INRUSH --- 2 AMP

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:

NO PLACE	X ±	0.030
ONE PLACE	.X ±	0.015
TWO PLACE	.XX ±	0.005
THREE PLACE	.XXX ±	
FOUR PLACE	.XXXX ±	
ANGLES	±	

THIRD ANGLE PROJECTION

DRAWN	SLB	21JUN82
CHECK	CEB	28JUN82
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE ASSEMBLY - TOGGLE SWITCH			
SIZE	TYPE	DRAWING NAME	REV
C	I	64AT34 SERIES CHART 2	8
SCALE	FULL	WEIGHT .09 LB EST	SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Toggle Switches](#) category:

Click to view products by [Honeywell](#) manufacturer:

Other Similar products are found below :

[8928K478](#) [8951K2998](#) [8951K3310](#) [8956K1283](#) [8956K1285](#) [8956K1286](#) [8956K1287](#) [8961K155](#) [8A1-C-222](#) [020017-13](#) [0090-0001](#) [0121-0015](#) [CS115W](#) [CS120W](#) [CS215I](#) [CS8275](#) [637H/25](#) [7101SPDV30BE](#) [7103SDV30BE](#) [7105D](#) [7108P3YAV2BE](#) [71YY50282](#) [7209SY9AQE](#) [7209SYCBE](#) [7300K36](#) [7301K38](#) [7301SS24484](#) [7303KZQE](#) [7306K36](#) [7503K21](#) [7565K6](#) [7595K6](#) [7660K12](#) [7691K14](#) [7704K3](#) [8391K108](#) [8811K17](#) [8825K5](#) [8828K13](#) [8835K3](#) [8858K44](#) [8E4011](#) [1202W](#) [A201SCWZB04](#) [A207SYCB04](#) [A208J61ZQ0004](#) [A221T1TCQ](#) [A232M1YCQ](#) [A323S1CWZQ](#) [1201W](#)