

# HF115FP

# MINIATURE POWER RELAY



File No.: E133481



File No.: 116934



## Features

- 1 pole 16A, 2 pole 8A , 1 CO & 2 CO contacts
- 5kV dielectric, Creepage distance 8 mm (coil to contacts)
- Meeting VDE 0700, 0631 reinforce insulation
- DC/AC coil type relay , Coil power 400mW / 0.75VA
- Manual test device
- Type with mechanical indicator / electrical indicator
- Sockets available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (29.0 x 13.0 x 25.5) mm

## CONTACT DATA

Contact arrangement	1C	2C
Contact resistance	100mΩ (at 1A 6VDC)	
Contact material	AgNi	
Contact rating (Res. load)	16A 250VAC	8A 250VAC
Max. switching voltage	440VAC	
Max. switching current	16A	8A
Max. switching power	4000VA	2000VA
Mechanical endurance	5 x 10 <sup>6</sup> OPS	
Electrical endurance	See approval reports for more details	

## CHARACTERISTICS

Insulation resistance	1000MΩ (500VDC)	
Dielectric strength	Between coil & contacts	5000VAC 1min
	Between open contacts	1000VAC 1min
	Between contact sets	2500VAC 1min
Operate time (at nomi. volt.)	15ms max.	
Release time (at nomi. volt.)	8ms max.	
Temperature rise (at nomi. volt.)	70K max.	
Shock resistance	Functional	98m/s <sup>2</sup>
	Destructive	980m/s <sup>2</sup>
Vibration resistance	NO	10Hz to 150Hz 10g
	NC	length direction: 10Hz to 150Hz 2g other direction: 10Hz to 150Hz 5g
Humidity	35% to 85% RH	
Ambient temperature	-40°C to 70°C	
Termination	PCB	
Unit weight	Approx. 16g	
Mounting distance	5mm, packing of sockets	

Notes: The data shown above are initial values.

## COIL

Coil power	DC type: 400mW AC type: 0.75VA
------------	--------------------------------

Notes: The data shown above don't include the power of electronic indicating circuit when the relay picks-up.

## COIL DATA

at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance Ω
12	8.4	1.2	18	360 x (1±10%)
24	16.8	2.4	36	1440 x (1±10%)
48	33.6	4.8	72	5760 x (1±15%)
110	77.0	11.0	165	25200 x (1±15%)

Notes: The max. allowable voltage in the COIL DATA is coil overdrive voltage, it is the instantaneous max. voltage which the relay coil could endure in a very short time.

Nominal Voltage VAC	Pick-up Voltage VAC	Drop-out Voltage VAC	Coil Current mA	Coil DC Resistance Ω
24	18.0	3.6	31.6	350 x (1±10%)
115	86.3	35.5	6.6	8100 x (1±15%)
230	172.5	34.5	3.2	32500 x (1±15%)

## SAFETY APPROVAL RATINGS

<b>UL&amp;CUL</b>	1 Fomr A: 16A 250VAC 2 Fomr A: 8A 250VAC
<b>VDE</b>	1 Fomr A: 16A 250VAC 2 Fomr A: 8A 250VAC

Notes: Only some typical ratings are listed above. If more details are required, please contact us.



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001、IECQ QC 080000 CERTIFIED

2009 Rev. 1.01


## ORDERING INFORMATION

Type	HF115FP /	024	-1Z	3	B	(XXX)
Coil voltage	012 ~ 110: 12, 24, 48, 110 VDC A24 ~ A230: 24, 115, 230 VAC					
Contact arrangement	1Z: 1 Form C		2Z: 2 Form C			
Version	3: 5.0mm 1 pole 16A		4: 5.0mm 2 pole 8A			
Contact material	B: AgNi					
Customer special code						


## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

### Outline Dimensions

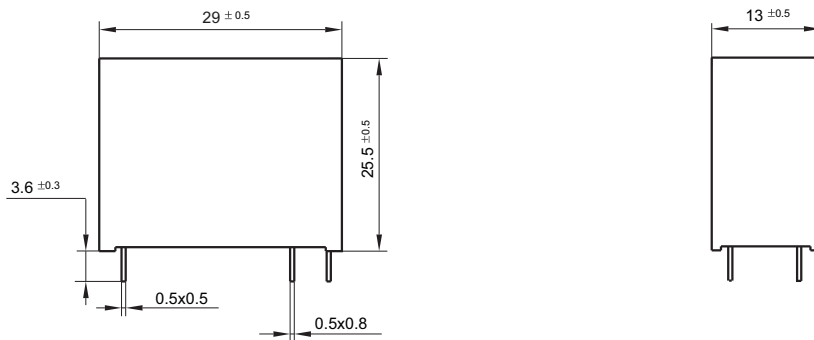

### PCB Layout (Bottom view)

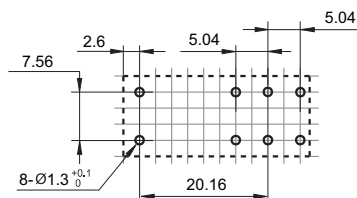

### DIN rail Socket



### Solder Socket




- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1$ mm, tolerance should be  $\pm 0.2$ mm; outline dimension  $> 1$ mm and  $\leq 5$ mm, tolerance should be  $\pm 0.3$ mm; outline dimension  $> 5$ mm, tolerance should be  $\pm 0.4$ mm.  
2) The tolerance without indicating for PCB layout is always  $\pm 0.1$ mm.  
3) The width of the gridding is 2.52mm.

Wiring Diagram (Bottom view)

HF115FP/ □□□ -1Z3□




HF115FP/ □□□ -2Z4□




CHARACTERISTIC CURVES


MAXIMUM SWITCHING POWER

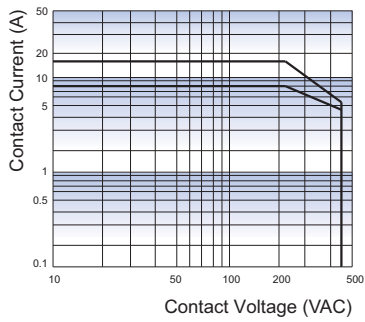


ENDURANCE CURVE

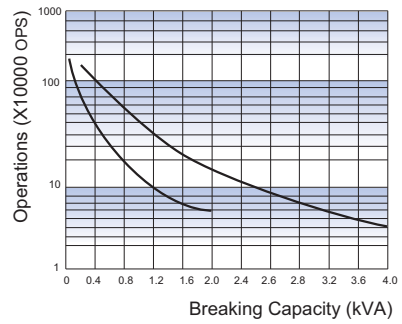

COIL OPERATING RANGE (AC)

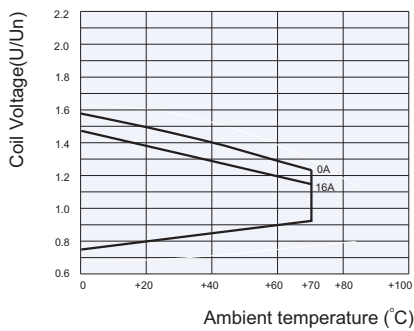

COIL OPERATING RANGE (DC)

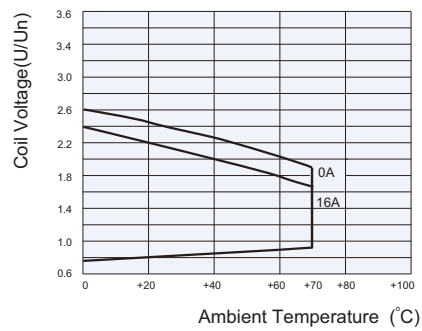

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [General Purpose Relays](#) category:*

*Click to view products by [Hongfa](#) manufacturer:*

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)  
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)  
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)  
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)  
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)  
[7-1393144-5](#) [7-1393767-8](#)