

HF32FA-G

SUBMINIATURE INTERMEDIATE POWER RELAY



File No.:E134517



File No.:40006182



File No.:CQC09002028689



Features

- 10A switching capability
- Creepage/clearance distance > 8mm
- 5kV dielectric strength (between coil and contacts)
- UL insulation system: Class F
- Meets VDE 0700, 0631 reinforce insulation
- Product in accordance to IEC 60335-1 available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (17.6 x 10.1 x 12.3) mm

CONTACT DATA

Contact arrangement	1A
Contact resistance	70mΩ max.(at 1A 6VDC)
Contact material	AgSnO ₂
Contact rating (Res. Load)	10A 250VAC
Max. switching voltage	250VAC
Max. switching current	10A
Max. switching power	2500VA
Mechanical endurance	1 x 10 ⁶ OPS
Electrical endurance	1 x 10 ⁴ OPS (10A 250VAC, Resistive load, at 85°C, 1s on 9s off)

CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	5000VAC 1min
	Between open contacts	1000VAC 1min
Operate time (at nomi. volt.)	8ms max.	
Release time (at nomi. volt.)	4ms max.	
Humidity	5% to 85% RH	
Ambient temperature	-40°C to 85°C	
Shock resistance*	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance*	10Hz to 55 Hz 1.65mm DA	
Termination	PCB	
Unit weight	Approx.4.6g	
Construction	Plastic sealed, Flux proofed	

- Notes:** 1) *Index is not in relay length direction.
 2) The data shown above are initial values.
 3) Please find coil temperature curve in the characteristic curves below.

COIL

Coil power	Standard: Approx. 450mW; Sensitive: Approx. 230mW
------------	--

COIL DATA

at 23°C

Standard type

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Voltage VDC ¹⁾	Coil Resistance Ω
3	2.25	0.15	3.9	20 x (1±10%)
5	3.75	0.25	6.5	55 x (1±10%)
6	4.50	0.30	7.8	80 x (1±10%)
9	6.75	0.45	11.7	180 x (1±10%)
12	9.00	0.60	15.6	320 x (1±10%)
18	13.5	0.90	23.4	720 x (1±10%)
24	18.0	1.20	31.2	1280 x (1±10%)
48 ²⁾	36.0	2.40	62.4	5120 x (1±10%)

Sensitive type

Nominal Voltage VDC	Pick-up Voltage VDC max.	Drop-out Voltage VDC min.	Max. Voltage VDC ¹⁾	Coil Resistance Ω
3	2.25	0.15	5.1	38 x (1±10%)
5	3.75	0.25	8.5	108 x (1±10%)
6	4.50	0.30	10.2	155 x (1±10%)
9	6.75	0.45	15.3	350 x (1±10%)
12	9.00	0.60	20.4	620 x (1±10%)
18	13.5	0.90	30.6	1390 x (1±10%)
24	18.0	1.20	40.8	2480 x (1±10%)
48 ²⁾	36.0	2.40	81.6	9920 x (1±10%)

- Notes:** 1) Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.
 2) For products with rated voltage ≥ 48V, measures should be taken to prevent coil overvoltage in order to protect coil in test and application (eg. Connect diodes in parallel).

SAFETY APPROVAL RATINGS

UL/CUL	10A 250VAC at 85°C B300
VDE	10A 250VAC at 85°C

- Notes:** 1) All values unspecified are at room temperature.
 2) Only typical loads are listed above. Other load specifications can be available upon request.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2015 Rev. 1.02


ORDERING INFORMATION

Type		HF32FA-G / 012 -H S L 1 G (XXX)					
Coil voltage	3, 5, 6, 9, 12, 18, 24, 48VDC						
Contact arrangement	H: 1 Form A						
Construction ¹⁾²⁾	S: Plastic sealed		Nil: Flux proofed				
Coil power	L: Sensitive		Nil: Standard				
Termination	1: Type 1		2: Type 2				
Contact plating ³⁾	G: Gold plated		Nil: No gold plated				
Special code ⁴⁾	XXX: Customer special requirement		Nil: Standard				

- Notes:** 1) We recommend flux proofed types for a clean environment (free from contaminations like H₂S, SO₂, NO₂, dust, etc.).
We suggest to choose plastic sealed types and validate it in real application for an unclean environment (with contaminations like H₂S, SO₂, NO₂, dust, etc).
- 2) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.
- 3) For gold plated type, the min. switching current and min. switching voltage is 10mA 5VDC.
- 4) The customer special requirement express as special code after evaluating by Hongfa. e.g.(335) stands for product in accordance to IEC 60335-1 (GWT).




OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

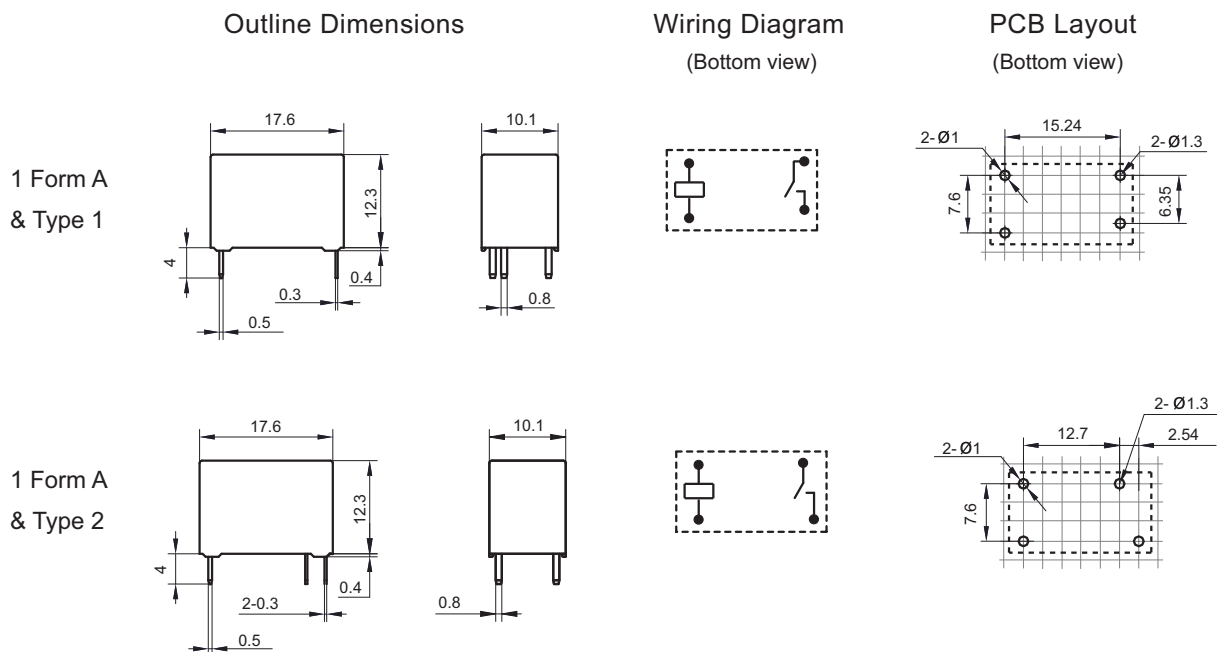

- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤ 1 mm, tolerance should be ± 0.2 mm; outline dimension ≤ 5 mm, tolerance should be ± 0.3 mm; outline dimension > 5 mm, tolerance should be ± 0.4 mm.
- 2) The tolerance without indicating for PCB layout is always ± 0.1 mm.
- 3) The width of the gridding is 2.54mm.

CHARACTERISTIC CURVES

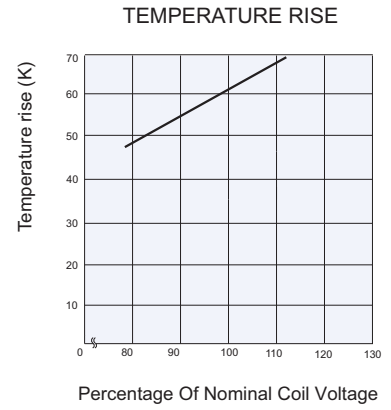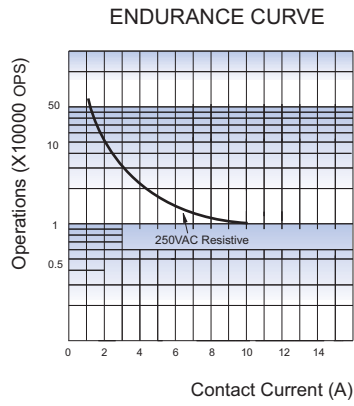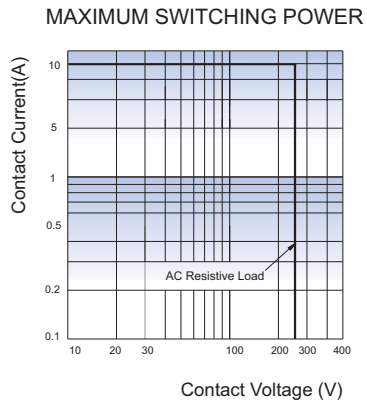

Test conditions: Flux proofed, at 85°C
5s on 5s off

Disclaimer

The specification is for reference only. See to "Terminology and Guidelines" for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [Hongfa](#) manufacturer:

Other Similar products are found below :

[PCN-105D3MH,000](#) [59641F200](#) [5JO-1000CD-SIL](#) [5X827E](#) [5X837F](#) [5X840F](#) [5X842F](#) [5X848E](#) [LY2N-AC120](#) [LY2-US-AC120](#) [M115C60](#)
[M115N010](#) [M115N0150](#) [603-12D](#) [60HE1-5DC](#) [60HE2S-12DC](#) [61211T0B4](#) [61212T400](#) [61222Q400](#) [61243B600](#) [61243C500](#) [61243Q400](#)
[61311BOA2](#) [61311BOA6](#) [61311BOA8](#) [61311C0A2](#) [61311COA1](#) [61311COA6](#) [61311F0A2](#) [61311QOA1](#) [61311QOA4](#) [61311T0D6](#)
[61311TOA6](#) [61311TOA7](#) [61311TOB3](#) [61311TOB4](#) [61311U0A6](#) [61312Q600](#) [61312T400](#) [61312T600](#) [61313U200](#) [61313U400](#) [61322T400](#)
[61332C400](#) [61343C200](#) [61343C600](#) [61343Q200](#) [61343T100](#) [61343T200](#) [61343T400](#)