

SOT-23 Plastic-Encapsulate MOSFETS

● Features

- $V_{DS}=60V$
- $I_D=340mA$
- $R_{DS(on)}@V_{GS}=10V < 5\Omega$
- $R_{DS(on)}@V_{GS}=4.5V < 5.3\Omega$
- ESD protected
- Rugged and reliable
- High density cell design for low $R_{DS(on)}$

Drain-source Voltage

60 V

Drain Current

0.34 Ampere


● Applications

- Battery operated systems
- Solid-state relays
- Direct logic-level interface: TTL/CMOS


● Mechanical Data

- Case: SOT-23
- Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

SOT-23



● Reference News

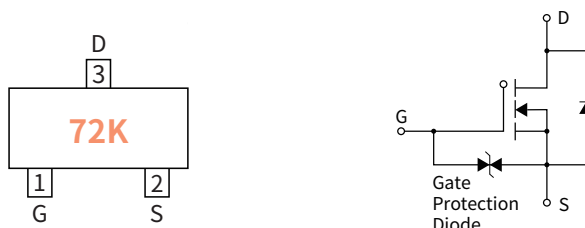

● Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Drain-source Voltage	V_{DS}	V	60
Gate-source Voltage	V_{GS}	V	± 20
Drain Current	I_D	mA	340
Pulsed Drain Current ⁽¹⁾	I_{DM}	A	0.8
Total Power Dissipation @ $T_A=25^\circ C$	P_D	mW	350
Thermal Resistance Junction-to-Ambient @ Steady State ⁽²⁾	$R_{\theta JA}$	$^\circ C / W$	357
Junction and Storage Temperature Range	T_J, T_{STG}	$^\circ C$	-55 ~ +150

● Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-23	R1	0.008	3000	45000	180000	7"

● **Static Parameter Characteristics** (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	V	60	—	—
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=60V, V_{GS}=0V$	μA	—	—	1.0
Gate-Body Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$	μA	—	—	± 10
Gate Threshold Voltage ⁽¹⁾	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=1.0mA$	V	1.0	1.3	2.5
Static Drain-Source On-Resistance ⁽¹⁾	$R_{DS(on)}$	$V_{GS}=10V, I_D=500mA$	Ω	—	0.9	5.0
		$V_{GS}=4.5V, I_D=200mA$		—	1.1	5.3
Diode Forward voltage	V_{SD}	$V_{GS}=0V, I_S=300mA$	V	—	—	1.5

● **Dynamic Parameters** (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Input Capacitance ⁽²⁾	C_{iss}	$V_{DS}=10V$ $V_{GS}=0V$ $f=1MHz$	pF	—	—	40
Output Capacitance ⁽²⁾	C_{oss}			—	—	30
Reverse Transfer Capacitance ⁽²⁾	C_{rss}			—	—	10

● **Switching Parameters** (Ta=25°C Unless otherwise specified)





PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Reverse recovery Time	T_{rr}	$V_{GS}=0V, I_S=300mA,$ $V_R=25V, Dis/dt=100a/\mu S$	ns	—	30	—
Turn-on Delay Time ⁽²⁾	$t_{D(on)}$	$V_{DD}=0V, V_{GS}=10V$ $R_L=250\Omega$		—	—	10
Turn-off Delay Time ⁽²⁾	$t_{D(off)}$	$R_{GEN}=50\Omega, R_{GS}=50\Omega$		—	—	15
Gate-Source Breakdown Voltage	BV_{GSO}	$I_{GS}=\pm 1mA$ (Open Drain)	V	± 21.5	—	± 30

Note :

(1)Pulse test ; Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$

(2)Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch.

● Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

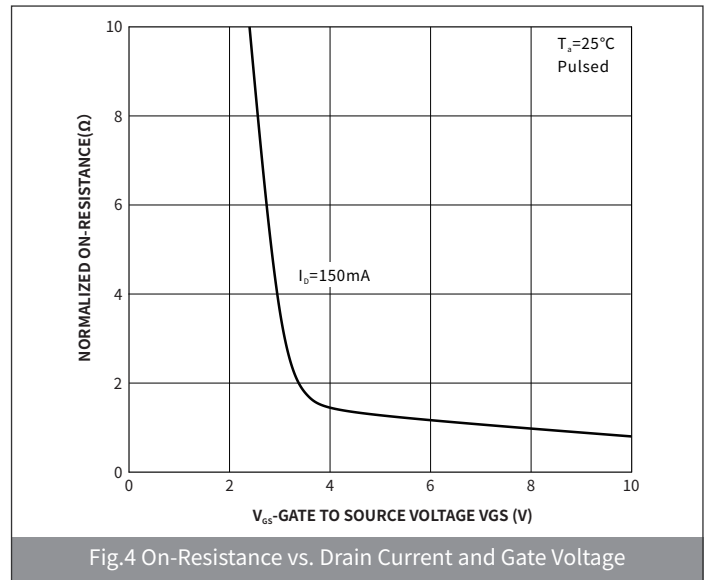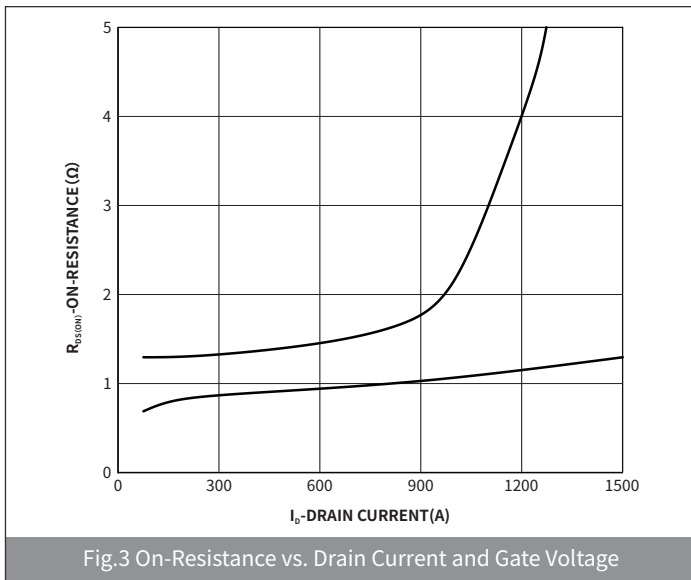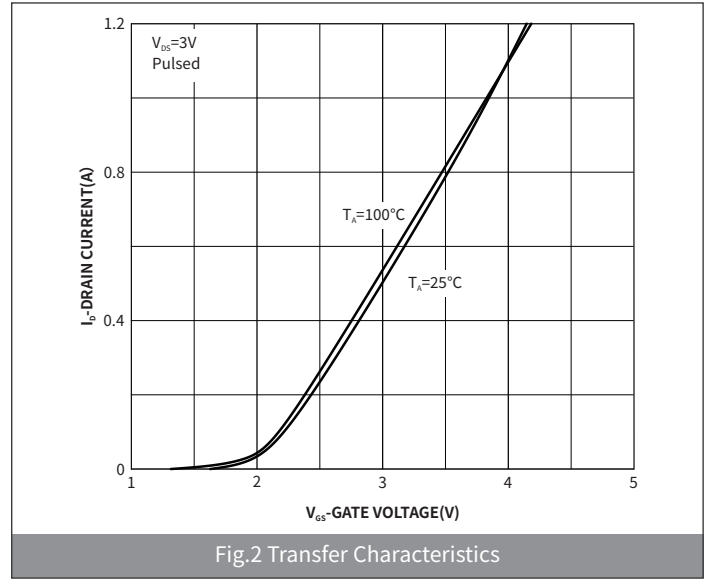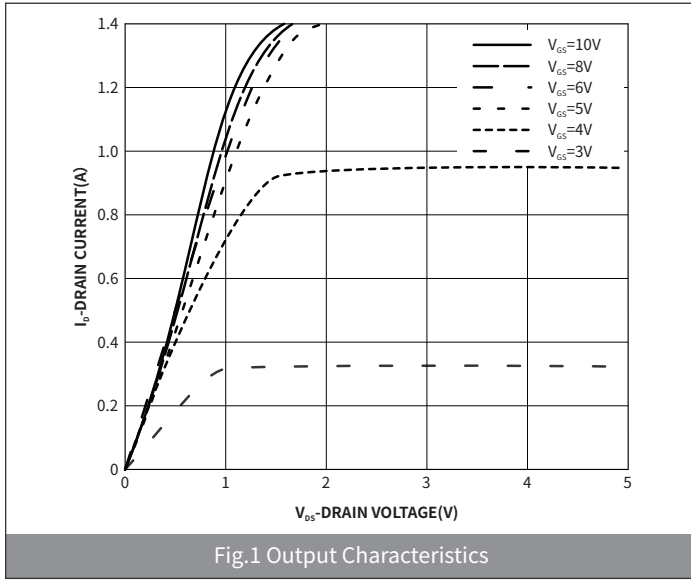

● Package Outline Dimensions (SOT-23)

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.90	1.15	0.035	0.045
A1	-	0.10	-	0.004
A2	0.90	1.05	0.035	0.041
b	0.30	0.50	0.012	0.020
c	0.10	0.20	0.004	0.008
D	2.80	3.00	0.110	0.118
E	1.20	1.40	0.047	0.055
E1	2.25	2.55	0.089	0.100
e	0.950TYP		0.037TYP	
e1	1.80	2.00	0.071	0.079
L	0.550REF		0.022REF	
L1	0.30	0.50	0.012	0.020
θ	-	8°	-	8°

● Suggested Pad Layout

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	0.75	0.85	0.030	0.033
K	0.85	0.95	0.033	0.037
M	1.95	2.05	0.077	0.081
N	1.85	1.95	0.073	0.077

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [hongjiacheng](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#)
[WMJ80N60C4](#) [BXP2N20L](#) [BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTGR](#) [DMNH15H110SK3-13](#)
[SLF10N65ABV2](#) [BSO203SP](#) [BSO211P](#) [IPA60R230P6](#)