

Features

- $V_{DSS} = -20V$
- $I_D = -2.3A$
- $R_{DS(on)}@V_{GS} = -4.5V < 112m\Omega$
- $R_{DS(on)}@V_{GS} = -2.5V < 142m\Omega$
- Trench Power LV MOSFET technology
- High density cell design for low $R_{DS(ON)}$
- High Speed switching

Applications



- Battery protection
- Load switch
- Power management

Mechanical Data

- Case: SOT-23
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Maximum Ratings (Ta=25°C Unless otherwise specified)

SOT-23

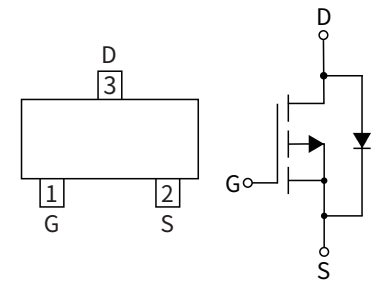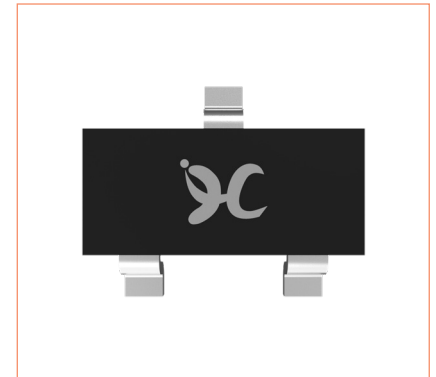

PARAMETER		SYMBOL	UNIT	VALUE
Drain-source Voltage		V_{RRM}	V	-20
Gate-source Voltage		V_{RMS}	V	± 8
Drain Current	Ta=25°C	I_d	A	-2.3
	Ta=70°C			-3.5
Pulsed Drain Current		I_{DM}	A	-10
Total Power Dissipation	Ta=25°C	P_d	W	0.7
	Ta=70°C			0.4
Storage temperature		T_{stg}	°C	-55 ~ +150
Junction temperature		T_j	°C	-55 ~ +150
Typical Thermal Resistance		$R_{\theta J-A}$	°C / W	312

Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-23	R1	0.008	3000	30000	120000	7"

▶ Static Parameter Characteristics (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	V	-20	—	—
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=-20V, V_{GS}=0V$	μA	—	—	-1
Gate-Body Leakage Current	I_{GSS}	$V_{GS}=\pm 8V, V_{DS}=0V$	nA	—	—	± 100
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A$	V	-0.4	-0.7	-1.0
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=4.5V, I_D=-2.8A$	m Ω	—	90	112
		$V_{GS}=-2.5V, I_C=-2A$		—	110	142
Diode Forward Voltage	V_{SD}	$I_S=0.7A$	V	—	-0.8	-1.2







▶ Dynamic Parameters (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Input Capacitance	C_{iss}	$V_{DS}=-10V, V_{GS}=0V, f=1MHz$	pF	—	405	—
Output Capacitance	C_{oss}			—	75	—
Reverse Transfer Capacitance	C_{rss}			—	55	—



▶ Switching Parameters (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Total Gate Charge	Q_g	$V_{GS}=-4.5V, V_{DS}=-10V, I_D=-2.3A$	nC	—	5.5	10
		$V_{GS}=-2.5V, V_{DS}=-10V, I_D=-2.3A$		—	3.3	6
Gate-Source Charge	Q_{gs}	$V_{GS}=-2.5V, V_{DS}=-10V, I_D=-2.3A$		—	0.7	—
Gate-Drain Charge	Q_{gd}	$V_{GS}=-2.5V, V_{DS}=-10V, I_D=-2.3A$		—	1.3	—
Reverse Recovery Time	t_{rr}	$I_F=-2.3A, di/dt=100A/us$	ns	—	13.1	—
Turn-on Delay Time	$t_{D(on)}$	$V_{GS}=-4.5V, V_{DS}=-10V, I_D=-1A$ $R_{GEN}=1\Omega$	ns	—	11	20
Turn-on Rise Time	t_r			—	35	60
Turn-off Delay Time	$t_{D(off)}$			—	30	50
Turn-off fall Time	t_f			—	10	20


► Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

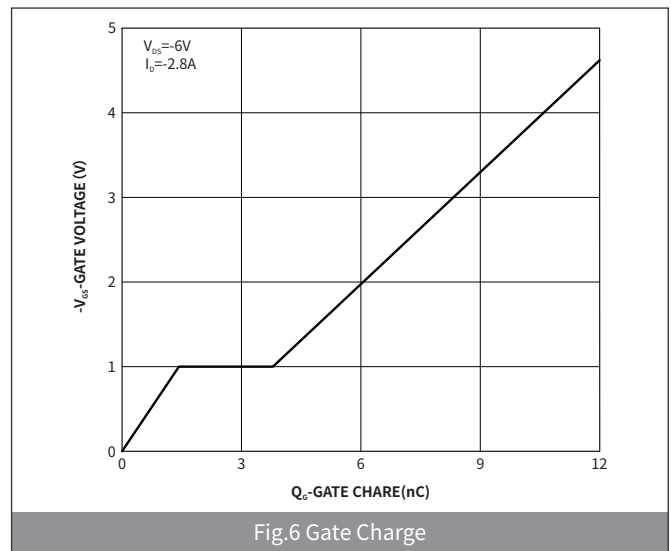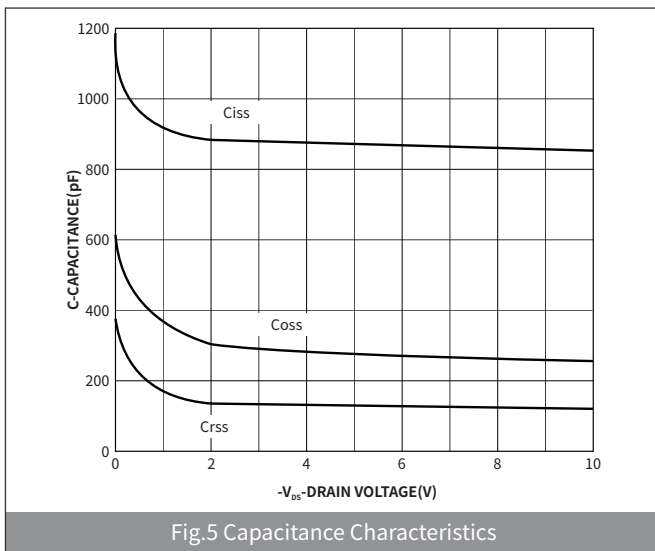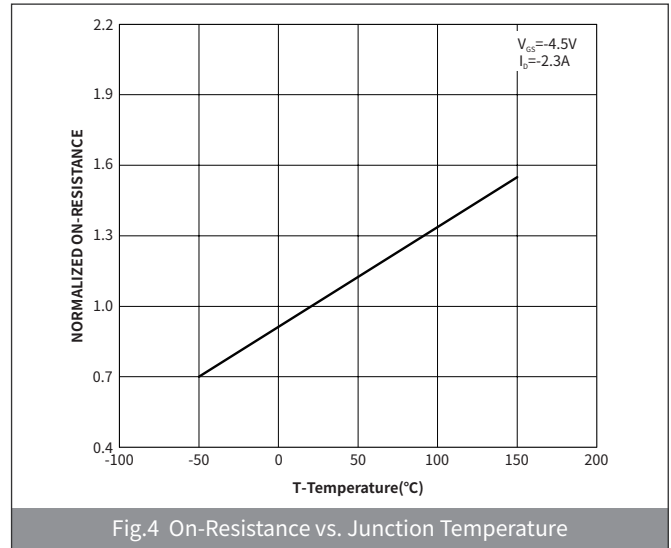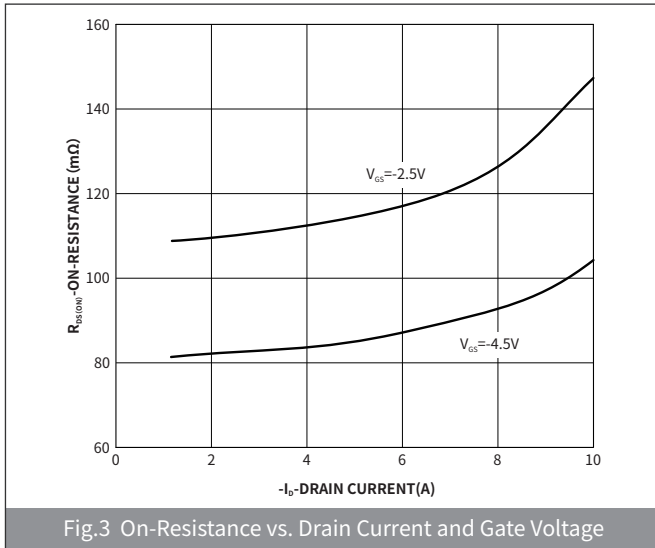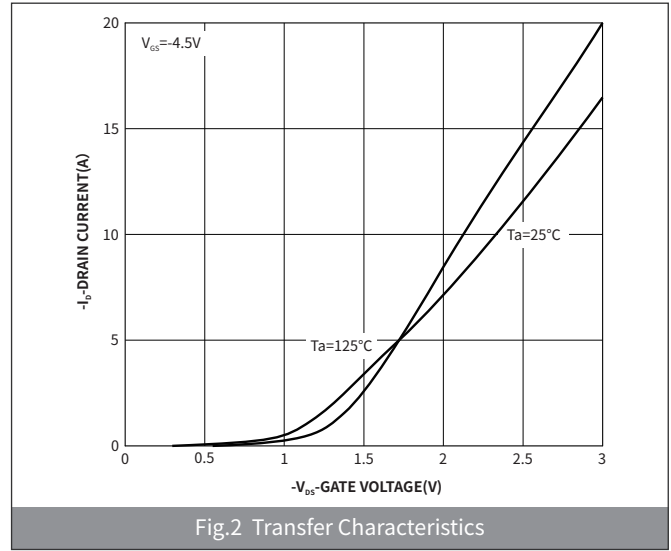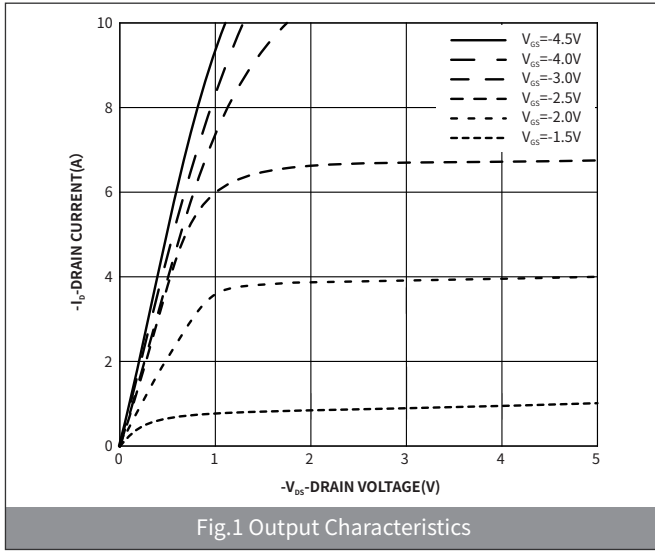


► Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

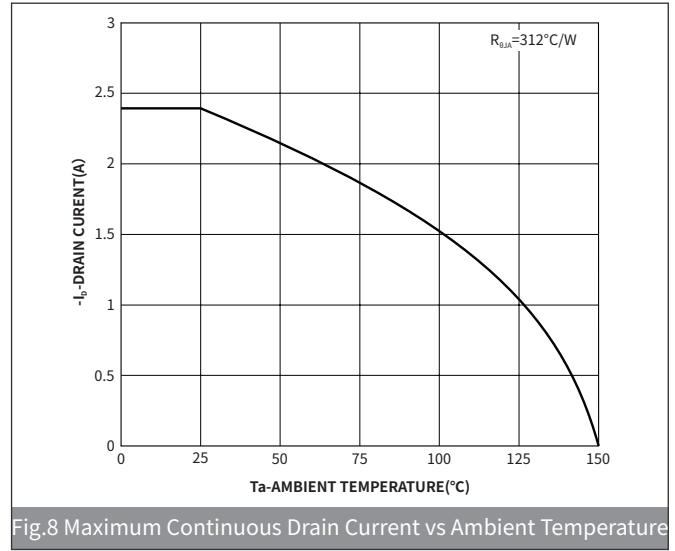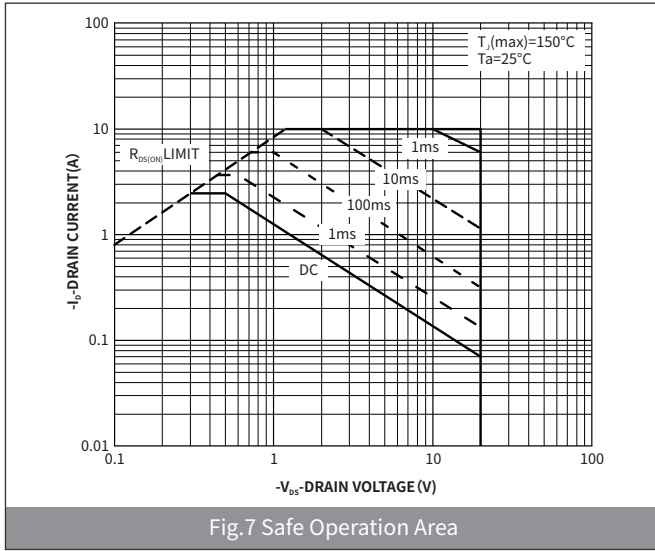

► Package Outline Dimensions (SOT-23)

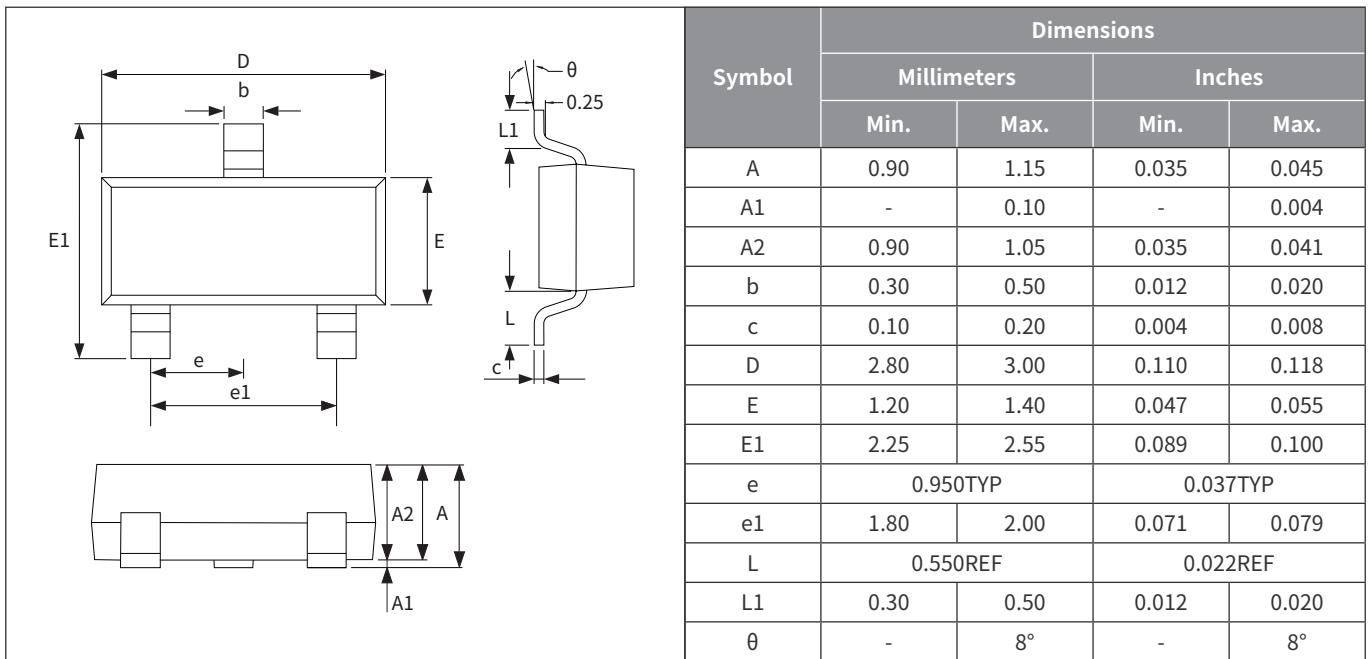

► Suggested Pad Layout

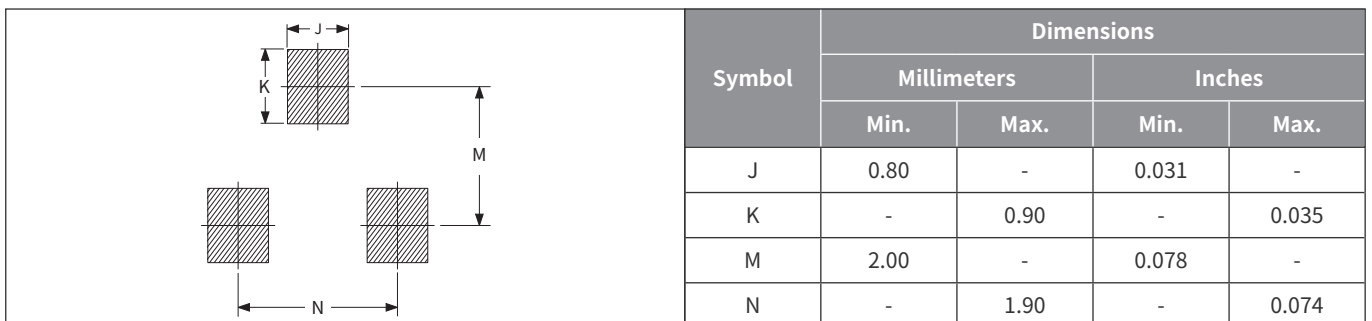

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [hongjiacheng](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#) [SLF10N65ABV2](#)
[BSO203SP](#) [BSO211P](#) [IPA60R230P6](#) [IPA60R460CE](#)