

## SOT-23 Plastic-Encapsulate MOSFETS

### Features

- $V_{DS}=20V$
- $I_D=3A$
- $R_{DS(on)}@V_{GS}=4.5V < 45m\Omega$
- $R_{DS(on)}@V_{GS}=2.5V < 58m\Omega$
- Trench Power MV MOSFET technology
- Voltage controlled small signal switch
- Fast Switching Speed

### Applications

- Battery operated systems
- Solid-state relays
- Direct logic-level interface: TTL/CMOS



### Mechanical Data

- Case: SOT-23  
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

### Reference News

**Drain-source Voltage**  
20 V  
**Drain Current**  
3 Ampere

SOT-23

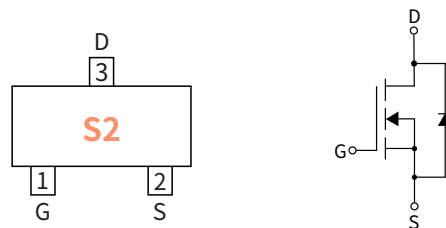

### Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Drain-source Voltage	$V_{DS}$	V	20
Gate-source Voltage	$V_{GS}$	V	$\pm 10$
Drain Current	$I_D$	A	3.0
T <sub>A</sub> =25°C @ Steady State			
Pulsed Drain Current <sup>(1)</sup>	$I_{DM}$	A	8.0
Total Power Dissipation @ T <sub>A</sub> =25°C	$P_D$	mW	700
Thermal Resistance Junction-to-Ambient @ Steady State <sup>(2)</sup>	$R_{\theta JA}$	°C / W	178
Junction and Storage Temperature Range	$T_J, T_{STG}$	°C	-55 ~ +150

Note:

(1) Surface Mounted on FR4 Board,  $t \leq 5$  sec.

(2) Surface Mounted on FR4 Board.

### Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-23	R1	0.008	3000	45000	180000	7"

● **Static Parameter Characteristics** (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS}=0V, I_D=250\mu A$	V	20	—	—
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS}=20V, V_{GS}=0V$	$\mu A$	—	—	1.0
Gate-Body Leakage Current	$I_{GSS}$	$V_{GS}=\pm 8.0V, V_{DS}=0V$	nA	—	—	$\pm 100$
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	V	0.55	0.75	1.1
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=4.5V, I_D=2.5A$	m $\Omega$	—	45	55
		$V_{GS}=2.5V, I_D=2.0A$		—	58	72
Diode Forward Voltage	$V_{SD}$	$I_S=2.5A, V_{GS}=0V$	V	—	—	1.2







● **Dynamic Parameters** (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Input Capacitance	$C_{iss}$	$V_{DS}=10V$ $V_{GS}=0V$ $f=1MHz$	pF	—	120	—
Output Capacitance	$C_{oss}$			—	30	—
Reverse Transfer Capacitance	$C_{rss}$			—	25	—


● **Switching Parameters** (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	Condition	UNIT	Min	Typ	Max
Total Gate Charge	$Q_g$	$V_{GS}=4.5V$ $V_{DS}=10V$ $I_D=2.5A$	nC	—	4.5	—
Gate-Source Charge	$Q_{gs}$			—	0.8	—
Gate-Drain Charge	$Q_{gd}$			—	0.5	—
Turn-on Delay Time	$t_{D(on)}$	$V_{GS}=4.5V$ $V_{DS}=10V$ $R_G=3.0\Omega$ $I_D=2.5A$	ns	—	3.0	—
Turn-on Rise Time	$t_r$			—	29	—
Turn-off Delay Time	$t_{D(off)}$			—	6.0	—
Turn-off fall Time	$t_f$			—	22	—


● Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

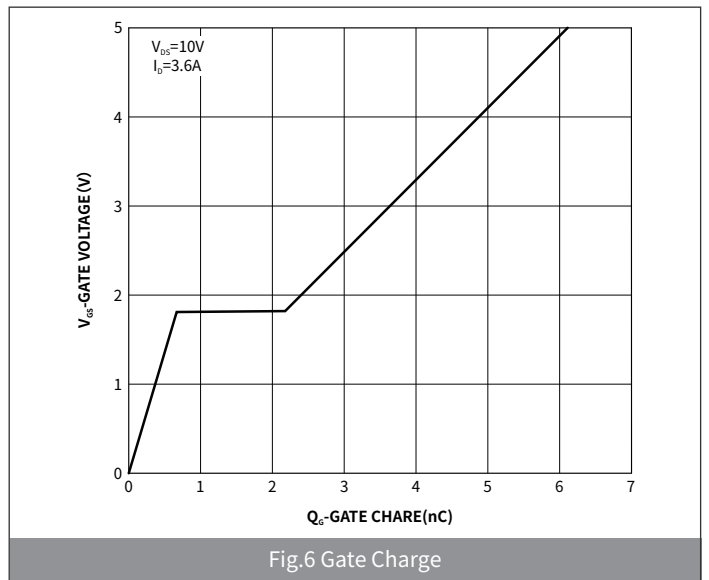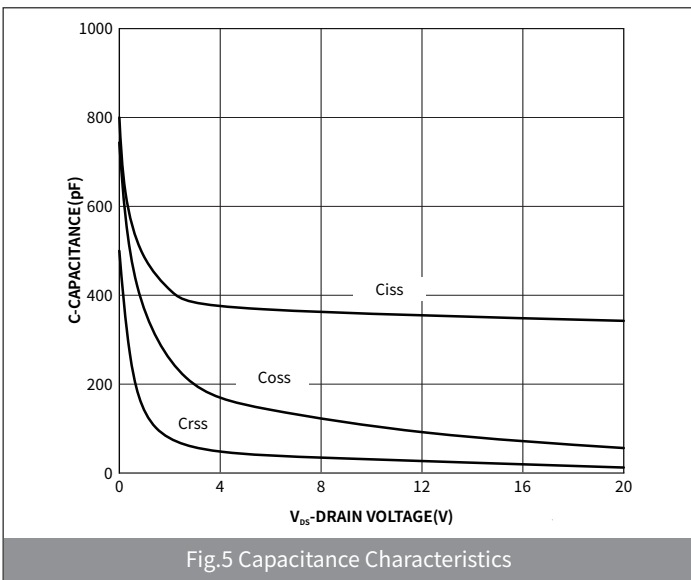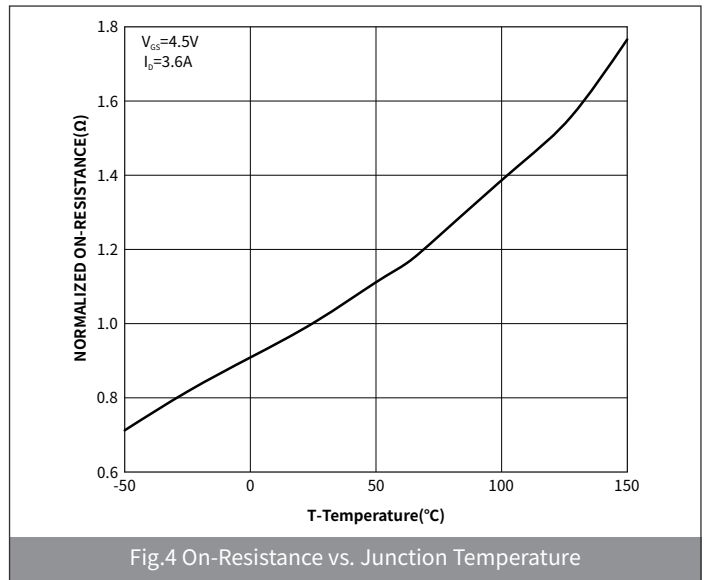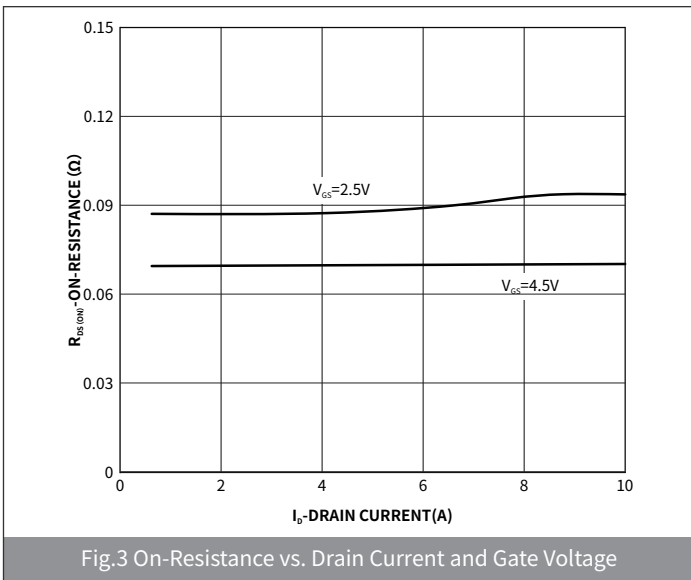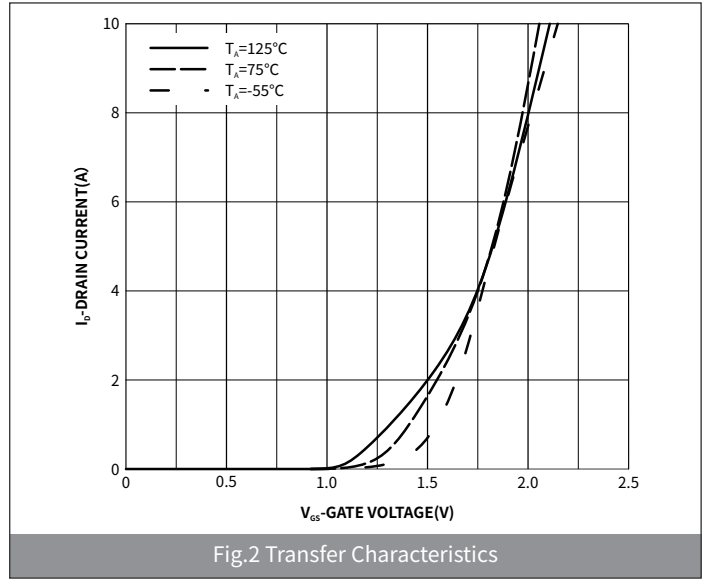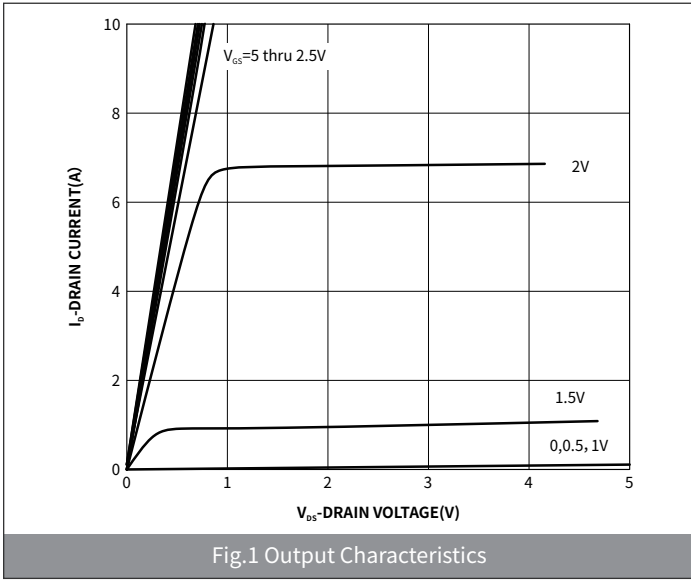


## ● Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

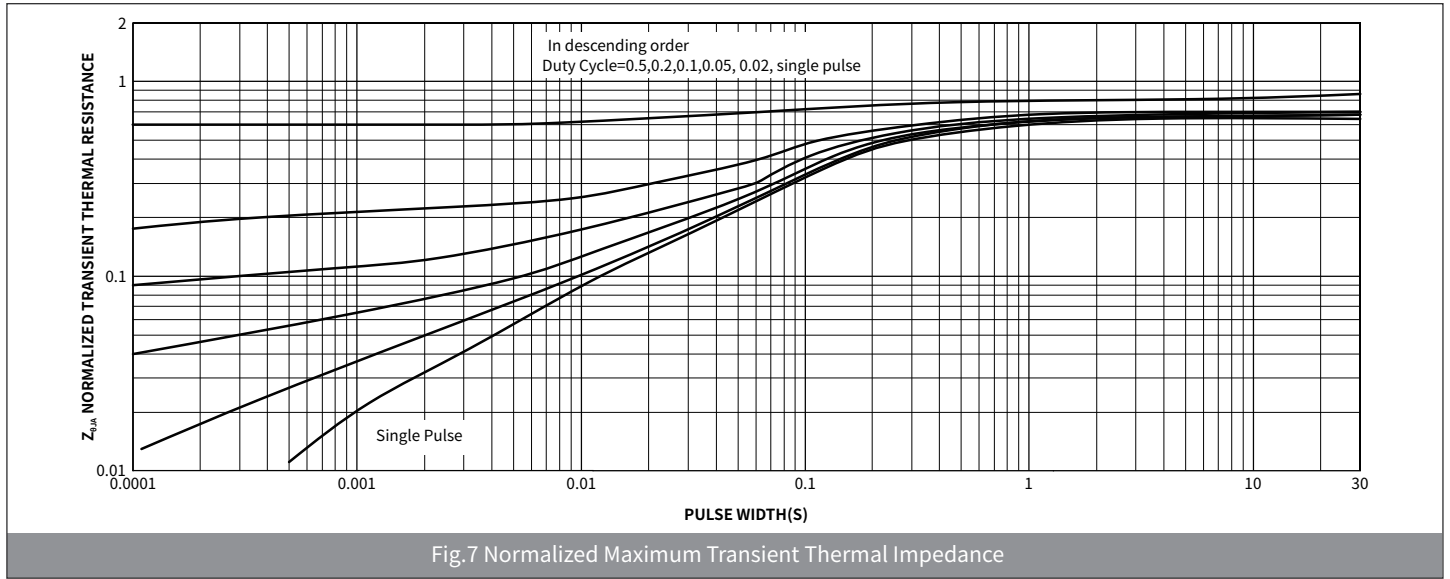

## ● Package Outline Dimensions (SOT-23)

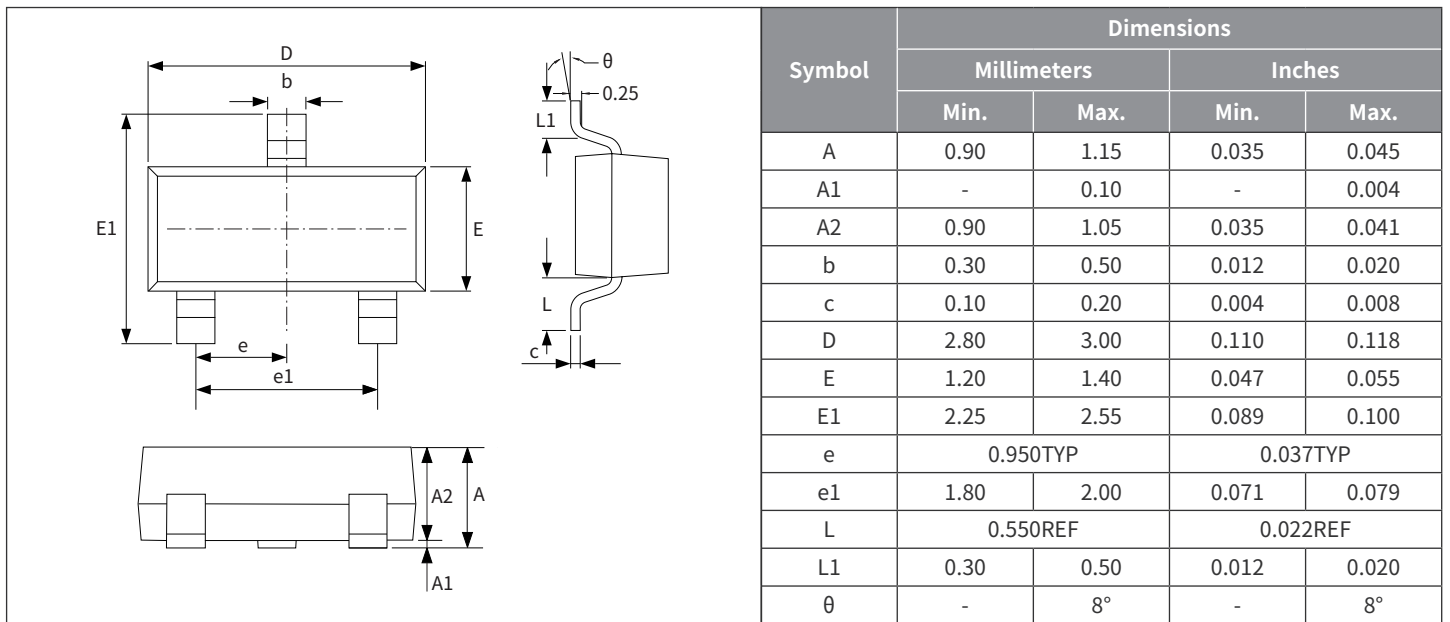

## ● Suggested Pad Layout

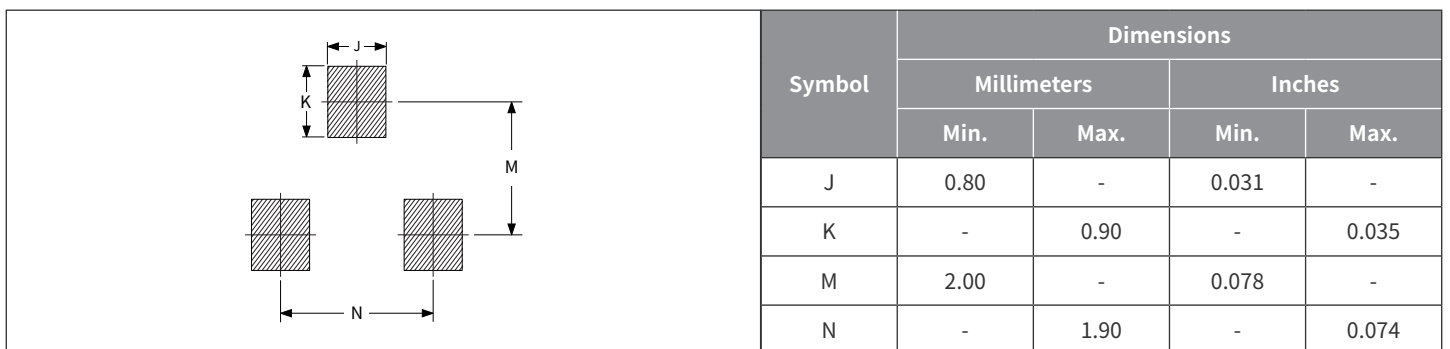

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [hongjiacheng](#) manufacturer:*

Other Similar products are found below :

[IRFD120](#) [IRFY240C](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)  
[IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(Te16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#)  
[DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#)  
[DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#)  
[DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-](#)  
[TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [NVMFS2D3P04M8LT1G](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)  
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#)