

SOT-23 Plastic-Encapsulate MOSFETS

BC2301 P-Channel 20-V(D-S) MOSFET


FEATURE

TrenchFET Power MOSFET


APPLICATIONS

- Load Switch for Portable Devices
- DC/DC Converter

SOT-23



MARKING: 2301



Maximum ratings ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 8	
Continuous Drain Current	I_D	-2.8	A
Pulsed Drain Current	I_{DM}	-10	
Continuous Source-Drain Diode Current	I_S	-0.72	
Maximum Power Dissipation	P_D	0.35	
Thermal Resistance from Junction to Ambient($t \leq 5s$)	$R_{\theta JA}$	357	°C/W
Junction Temperature	T_J	150	°C
Storage Temperature	T_{stg}	-55 ~+150	

Electrical characteristics ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Static						
Drain-source breakdown voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_{\text{D}} = -250\mu\text{A}$	-20			V
Gate-source threshold voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}, I_{\text{D}} = -250\mu\text{A}$	-0.4		-1	
Gate-source leakage	I_{GSS}	$V_{\text{DS}} = 0\text{V}, V_{\text{GS}} = \pm 8\text{V}$			± 100	nA
Zero gate voltage drain current	I_{DSS}	$V_{\text{DS}} = -16\text{V}, V_{\text{GS}} = 0\text{V}$			-1	μA
Drain-source on-state resistance ^a	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}} = -4.5\text{V}, I_{\text{D}} = -2.8\text{A}$		0.090	0.112	Ω
		$V_{\text{GS}} = -2.5\text{V}, I_{\text{D}} = -2.0\text{A}$		0.110	0.142	
Forward transconductance ^a	g_{fs}	$V_{\text{DS}} = -5\text{V}, I_{\text{D}} = -2.8\text{A}$		6.5		S
Dynamic^b						
Input capacitance	C_{iss}	$V_{\text{DS}} = -10\text{V}, V_{\text{GS}} = 0\text{V}, f = 1\text{MHz}$		405		pF
Output capacitance	C_{oss}			75		
Reverse transfer capacitance	C_{rss}			55		
Total gate charge	Q_g	$V_{\text{DS}} = -10\text{V}, V_{\text{GS}} = -4.5\text{V}, I_{\text{D}} = -3\text{A}$		5.5	10	nC
Gate-source charge	Q_{gs}	$V_{\text{DS}} = -10\text{V}, V_{\text{GS}} = -2.5\text{V}, I_{\text{D}} = -3\text{A}$		3.3	6	
Gate-drain charge	Q_{gd}			0.7		
Gate resistance	R_g			1.3		
Turn-on delay time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = -10\text{V}, R_L = 10\Omega, I_{\text{D}} = -1\text{A}, V_{\text{GEN}} = -4.5\text{V}, R_{\text{G}} = 1\Omega$		6.0		Ω
Rise time	t_r			11	20	ns
Turn-off delay time	$t_{\text{d}(\text{off})}$			35	60	
Fall time	t_f			30	50	
Drain-source body diode characteristics						
Continuous source-drain diode current	I_s	$T_c = 25^\circ\text{C}$			-1.3	A
Pulse diode forward current ^a	I_{SM}				-10	
Body diode voltage	V_{SD}	$I_s = -0.7\text{A}$		-0.8	-1.2	






Notes :

a.Pulse Test : Pulse Width < 300 μs , Duty Cycle $\leq 2\%$.

b.Guaranteed by design, not subject to production testing.

Typical Characteristics


BC2301

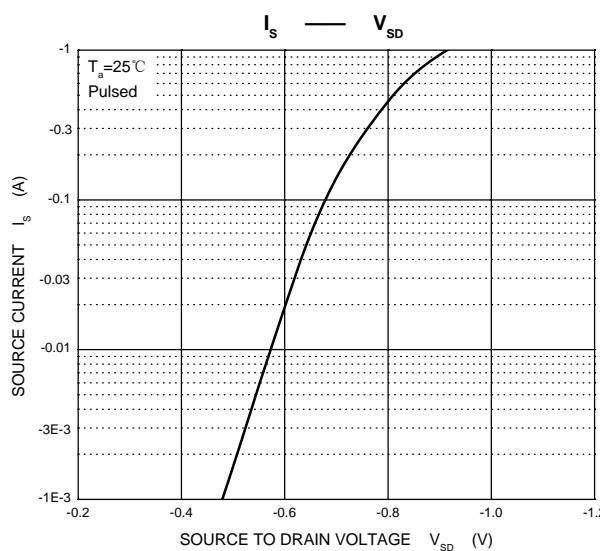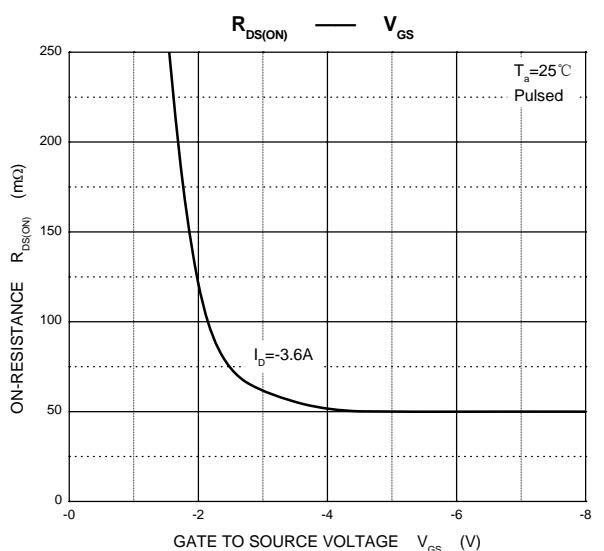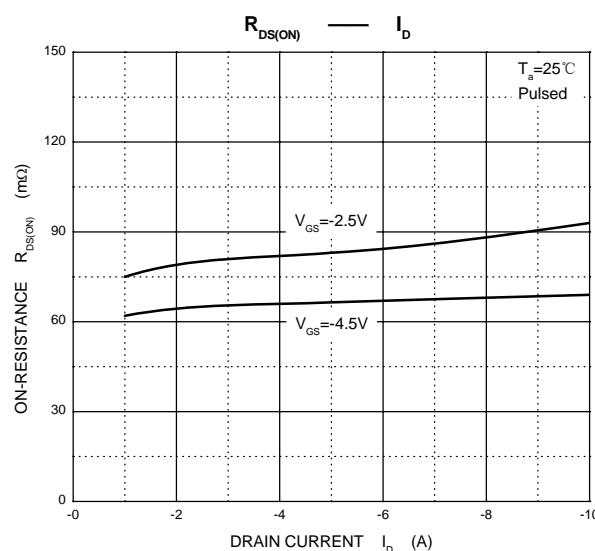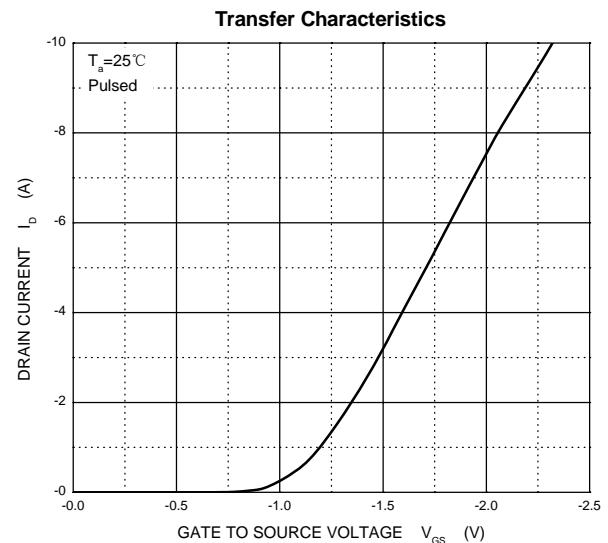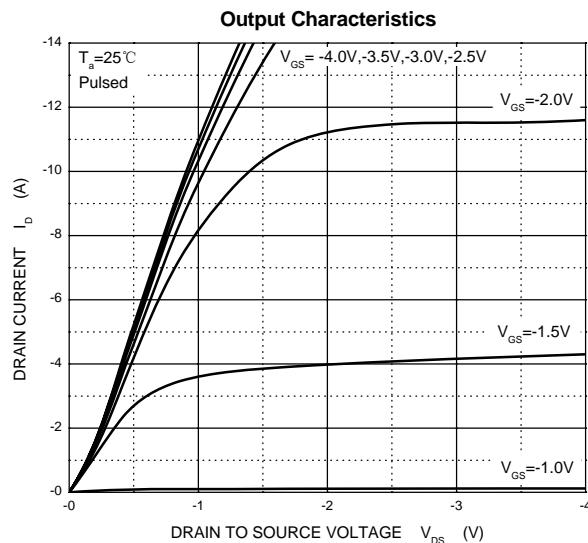

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

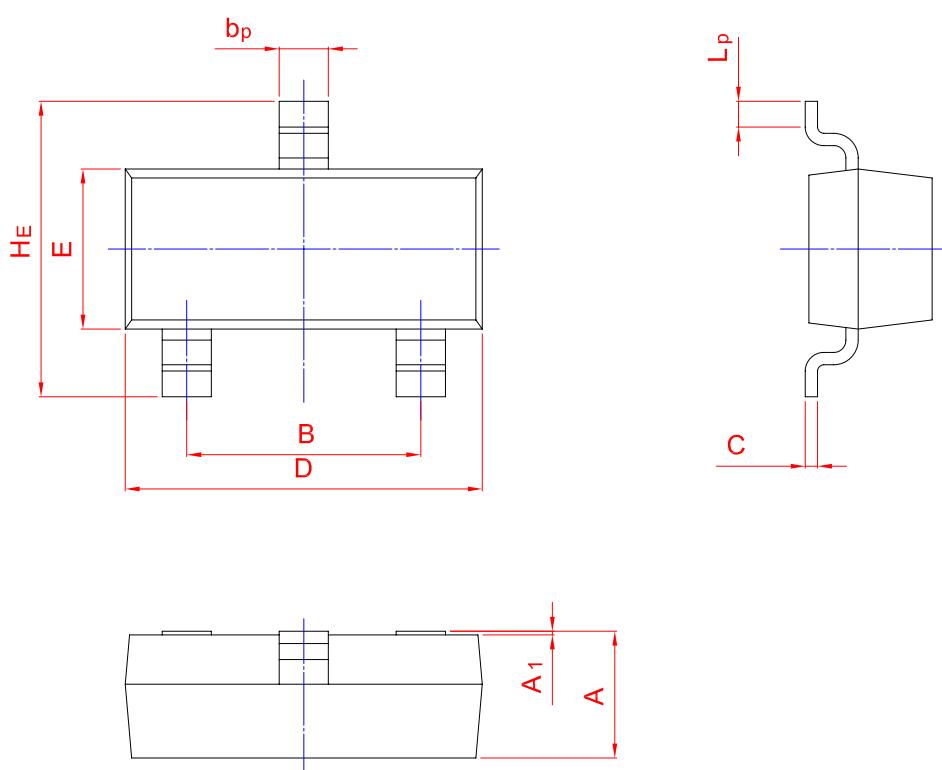

UNIT	A	B	b_p	C	D	E	H_E	A_1	L_p
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by Hong Kong Chuangji manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [NTNS3A92PZT5G](#) [IRFD120](#) [IRFF430](#) [JANTX2N5237](#) [2N7000](#)
[AOD464](#) [2SK2267\(Q\)](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [SSM6J414TU,LF\(T](#) [751625C](#)
[IPS70R2K0CEAKMA1](#) [BSF024N03LT3 G](#) [PSMN4R2-30MLD](#) [TK31J60W5,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#)
[EFC2J004NUZTDG](#) [FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE2384](#) [NTE2969](#) [NTE6400A](#) [DMC2700UDMQ-7](#)
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [SSM6P54TU,LF](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#)
[DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [IPSA70R950CEAKMA1](#) [IPSA70R2K0CEAKMA1](#) [STU5N65M6](#)
[C3M0021120D](#)