



BZX84C...Series Silicon Planar Zener Diodes

This series of Zener diodes is offered in the convenient, surface mount plastic SOT-23 package. These devices are designed to provide voltage regulation with minimum space requirement. They are well suited for applications such as cellular phones, hand held portables, and high density PC boards.



1. Anode 3. Cathode
SOT-23 Plastic Package

Features

- Zener breakdown voltage range - 2.0 V to 75 V
- Package designed for optimal automated board assembly
- Small package size for high density applications

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)

| Parameter | Symbol | Value | Unit |
|---|-----------------|---------------|--------------------|
| Power Dissipation | P_D | 350 | mW |
| Thermal Resistance, Junction to Ambient ¹⁾ | $R_{\theta JA}$ | 417 | $^\circ\text{C/W}$ |
| Junction and Storage Temperature Range | T_j, T_{stg} | - 65 to + 150 | $^\circ\text{C}$ |

¹⁾ Alumina = 0.4 X 0.3 X 0.024 in, 99.5% alumina




Electrical Characteristics ($T_a = 25\text{ }^\circ\text{C}$ unless otherwise noted, $V_F < 0.9\text{ V}$ at $I_F = 10\text{ mA}$)

| Type | Marking Code | Zener Voltage Range ¹⁾ | | | | Dynamic Impedance | | Reverse Current | |
|-----------|--------------|-----------------------------------|----------|----------|-------------|-------------------|-------------|------------------------|----------|
| | | V_{ZT} | | | at I_{ZT} | Z_{ZT} | at I_{ZT} | I_R | at V_R |
| | | Nom. (V) | Min. (V) | Max. (V) | (mA) | Max. (Ω) | (mA) | Max. (μA) | (V) |
| BZX84C2V0 | A8 | 2 | 1.8 | 2.15 | 5 | 100 | 5 | 120 | 0.5 |
| BZX84C2V2 | B8 | 2.2 | 2.08 | 2.33 | 5 | 100 | 5 | 120 | 0.7 |
| BZX84C2V4 | C8 | 2.4 | 2.2 | 2.6 | 5 | 100 | 5 | 50 | 1 |
| BZX84C2V7 | D8 | 2.7 | 2.5 | 2.9 | 5 | 100 | 5 | 20 | 1 |
| BZX84C3V0 | E8 | 3 | 2.8 | 3.2 | 5 | 95 | 5 | 10 | 1 |
| BZX84C3V3 | F8 | 3.3 | 3.1 | 3.5 | 5 | 95 | 5 | 5 | 1 |
| BZX84C3V6 | H8 | 3.6 | 3.4 | 3.8 | 5 | 90 | 5 | 5 | 1 |
| BZX84C3V9 | J8 | 3.9 | 3.7 | 4.1 | 5 | 90 | 5 | 3 | 1 |
| BZX84C4V3 | K8 | 4.3 | 4 | 4.6 | 5 | 90 | 5 | 3 | 1 |
| BZX84C4V7 | M8 | 4.7 | 4.4 | 5 | 5 | 80 | 5 | 3 | 2 |
| BZX84C5V1 | N8 | 5.1 | 4.8 | 5.4 | 5 | 60 | 5 | 2 | 2 |
| BZX84C5V6 | P8 | 5.6 | 5.2 | 6 | 5 | 40 | 5 | 1 | 2 |
| BZX84C6V2 | R8 | 6.2 | 5.8 | 6.6 | 5 | 10 | 5 | 3 | 4 |
| BZX84C6V8 | X8 | 6.8 | 6.4 | 7.2 | 5 | 15 | 5 | 2 | 4 |
| BZX84C7V5 | Y8 | 7.5 | 7 | 7.9 | 5 | 15 | 5 | 1 | 5 |
| BZX84C8V2 | Z8 | 8.2 | 7.7 | 8.7 | 5 | 15 | 5 | 0.7 | 5 |
| BZX84C9V1 | A9 | 9.1 | 8.5 | 9.6 | 5 | 15 | 5 | 0.5 | 6 |
| BZX84C10 | B9 | 10 | 9.4 | 10.6 | 5 | 20 | 5 | 0.2 | 7 |
| BZX84C11 | C9 | 11 | 10.4 | 11.6 | 5 | 20 | 5 | 0.1 | 8 |
| BZX84C12 | D9 | 12 | 11.4 | 12.7 | 5 | 25 | 5 | 0.1 | 8 |
| BZX84C13 | E9 | 13 | 12.4 | 14.1 | 5 | 30 | 5 | 0.1 | 8 |
| BZX84C15 | F9 | 15 | 13.8 | 15.6 | 5 | 30 | 5 | 0.05 | 10.5 |
| BZX84C16 | H9 | 16 | 15.3 | 17.1 | 5 | 40 | 5 | 0.05 | 11.2 |
| BZX84C18 | J9 | 18 | 16.8 | 19.1 | 5 | 45 | 5 | 0.05 | 12.6 |
| BZX84C20 | K9 | 20 | 18.8 | 21.2 | 5 | 55 | 5 | 0.05 | 14 |
| BZX84C22 | M9 | 22 | 20.8 | 23.3 | 5 | 55 | 5 | 0.05 | 15.4 |
| BZX84C24 | N9 | 24 | 22.8 | 25.6 | 5 | 70 | 5 | 0.05 | 16.8 |
| BZX84C27 | P9 | 27 | 25.1 | 28.9 | 2 | 80 | 2 | 0.05 | 18.9 |
| BZX84C30 | R9 | 30 | 28 | 32 | 2 | 80 | 2 | 0.05 | 21 |
| BZX84C33 | X9 | 33 | 31 | 35 | 2 | 80 | 2 | 0.05 | 23.1 |
| BZX84C36 | Y9 | 36 | 34 | 38 | 2 | 90 | 2 | 0.05 | 25.2 |
| BZX84C39 | Z9 | 39 | 37 | 41 | 2 | 130 | 2 | 0.05 | 27.3 |
| BZX84C43 | A0 | 43 | 40 | 46 | 2 | 150 | 2 | 0.05 | 30.1 |
| BZX84C47 | B0 | 47 | 44 | 50 | 2 | 170 | 2 | 0.05 | 32.9 |
| BZX84C51 | C0 | 51 | 48 | 54 | 2 | 180 | 2 | 0.05 | 35.7 |
| BZX84C56 | D0 | 56 | 52 | 60 | 2 | 200 | 2 | 0.05 | 39.2 |
| BZX84C62 | E0 | 62 | 58 | 66 | 2 | 215 | 2 | 0.05 | 43.4 |
| BZX84C68 | F0 | 68 | 64 | 72 | 2 | 240 | 2 | 0.05 | 47.6 |
| BZX84C75 | H0 | 75 | 70 | 79 | 2 | 255 | 2 | 0.05 | 52.5 |


¹⁾ Tested with pulses $t_p = 20\text{ ms}$.




Temperature Coefficient

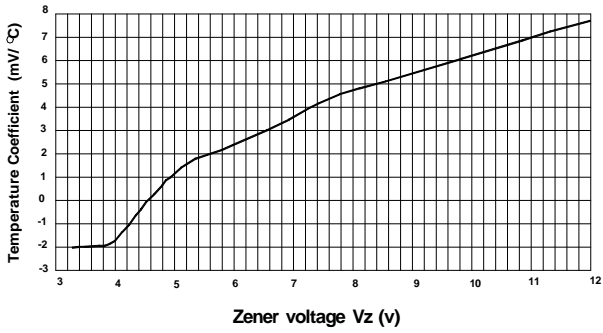



Temperature Coefficient

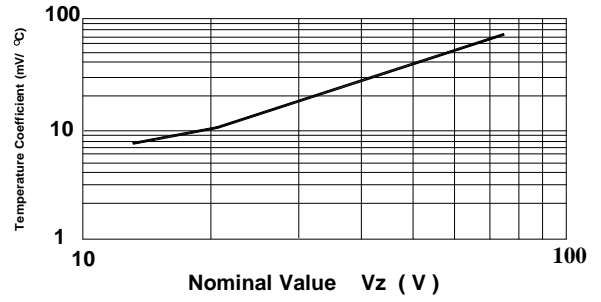

Power Derating Curve

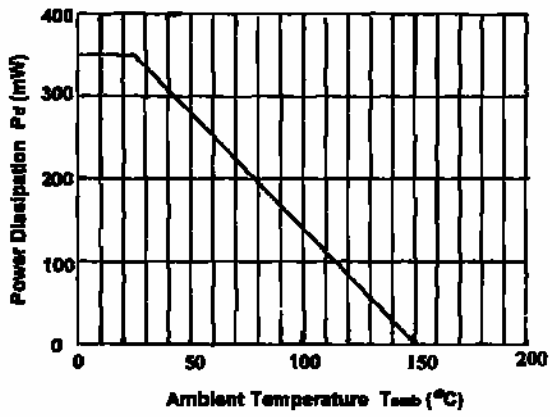

Typical Forward Voltage

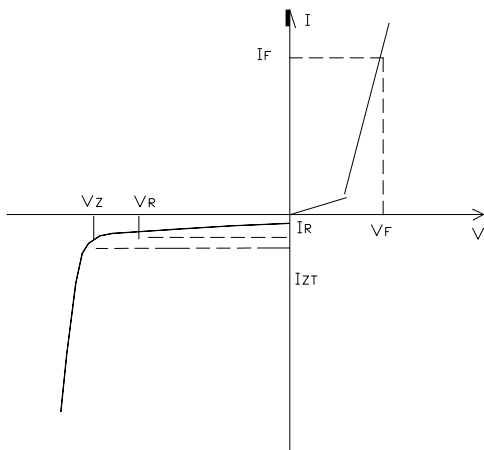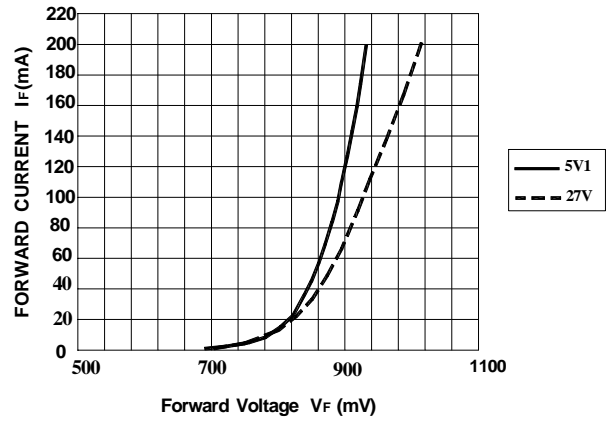



Zener Voltage Regulator



PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

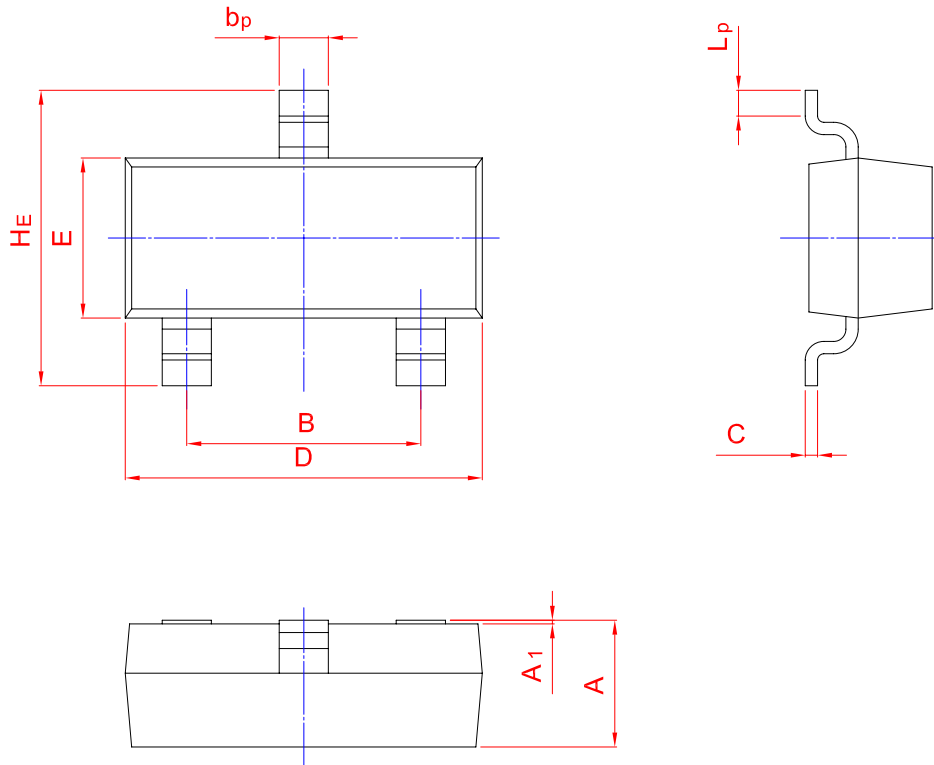

| UNIT | A | B | b_p | C | D | E | $H\epsilon$ | A_1 | L_p |
|------|------|------|-------|------|------|------|-------------|-------|-------|
| mm | 1.40 | 2.04 | 0.50 | 0.19 | 3.10 | 1.65 | 3.00 | 0.100 | 0.50 |
| | 0.95 | 1.78 | 0.35 | 0.08 | 2.70 | 1.20 | 2.20 | 0.013 | 0.20 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zener Diodes](#) category:

Click to view products by [Hong Kong Chuangji](#) manufacturer:

Other Similar products are found below :

[RKZ13B2KG#P1](#) [DL5234B](#) [EDZTE6113B](#) [1N4682](#) [1N4691](#) [1N4693](#) [1N4732A](#) [1N4736A](#) [1N4750A](#) [1N4759ARL](#) [1N5241B](#) [1N5365B](#)
[1N5369B](#) [1N747A](#) [1N959B](#) [1N964B](#) [1N966B](#) [1N968B](#) [1N972B](#) [NTE5121A](#) [NTE5147A](#) [NTE5152A](#) [NTE5155A](#) [NTE5164A](#)
[JANS1N4974US](#) [JANTX1N5907](#) [1N4692](#) [1N4700](#) [1N4702](#) [1N4704](#) [1N4711](#) [1N4714](#) [1N4737A](#) [1N4745ARL](#) [1N4752A](#) [1N4752ARL](#)
[1N4760ARL](#) [1N5221B](#) [1N5231B-TR](#) [1N5236B](#) [1N5241BTR](#) [1N5242BTR](#) [1N5350B](#) [1N5352B](#) [1N961BRR1](#) [1N964BRL](#) [RKZ5.1BKU#P6](#)
[3SMAJ5946B-TP](#) [3SMAJ5950B-TP](#) [3SMBJ5925B-TP](#)