


Dual Bias Resistor Transistors

NPN Silicon Surface Mount Transistors with Monolithic Bias Resistor Network

The BRT (Bias Resistor Transistor) contains a single transistor with a monolithic bias network consisting of two resistors; a series base resistor and a base-emitter resistor. These digital transistors are designed to replace a single device and its external resistor bias network. The BRT eliminates these individual components by integrating them into a single device. In the MMUN5211 DW series, two BRT devices are housed in the SOT-363 package which is ideal for low power surface mount applications where board space is at a premium.

- Simplifies Circuit Design
- Reduces Board Space
- Reduces Component Count
- We declare that the material of product compliance with RoHS requirements.

MMUN5211DW Series



SOT-363

MAXIMUM RATINGS (T_A = 25°C unless otherwise noted, common for Q₁ and Q₂)


Rating	Symbol	Value	Unit
Collector-Base Voltage	V _{CBO}	50	Vdc
Collector-Emitter Voltage	V _{CEO}	50	Vdc
Collector Current	I _C	100	mAdc

THERMAL CHARACTERISTICS


Characteristic (One Junction Heated)	Symbol	Max	Unit
Total Device Dissipation $T_A = 25^\circ\text{C}$	P _D	187 (Note 1.) 256 (Note 2.)	mW
Derate above 25°C		1.5 (Note 1.) 2.0 (Note 2.)	mW/°C
Thermal Resistance – Junction-to-Ambient	R _{θJA}	670 (Note 1.) 490 (Note 2.)	°C/W
Characteristic (Both Junctions Heated)	Symbol	Max	Unit
Total Device Dissipation $T_A = 25^\circ\text{C}$	P _D	250 (Note 1.) 385 (Note 2.)	mW
Derate above 25°C		2.0 (Note 1.) 3.0 (Note 2.)	mW/°C
Thermal Resistance – Junction-to-Ambient	R _{θJA}	493 (Note 1.) 325 (Note 2.)	°C/W
Thermal Resistance – Junction-to-Lead	R _{θJL}	188 (Note 1.) 208 (Note 2.)	°C/W
Junction and Storage Temperature	T _J , T _{stg}	-55 to +150	°C

1. FR-4 @ Minimum Pad

2. FR-4 @ 1.0 x 1.0 inch Pad



MARKING DIAGRAM



7X = Device Marking
(See Page 2)

DEVICE MARKING INFORMATION

See specific marking information in the device marking table on page 2 of this data sheet.

DEVICE MARKING , RESISTOR VALUES AND ORDERING INFORMATION

Device	Package	Marking	R1(K)	R2(K)	Shipping
MMUN5211DW	SOT-363	7A	10	10	3000/Tape&Reel
MMUN5212DW	SOT-363	7B	22	22	3000/Tape&Reel
MMUN5213DW	SOT-363	7C	47	47	3000/Tape&Reel
MMUN5214DW	SOT-363	7D	10	47	3000/Tape&Reel
MMUN5215DW	SOT-363	7E	10	∞	3000/Tape&Reel
MMUN5216DW	SOT-363	7F	4.7	∞	3000/Tape&Reel
MMUN5230DW	SOT-363	7G	1	1	3000/Tape&Reel
MMUN5231DW	SOT-363	7H	2.2	2.2	3000/Tape&Reel
MMUN5232DW	SOT-363	7J	4.7	4.7	3000/Tape&Reel
MMUN5233DW	SOT-363	7K	4.7	47	3000/Tape&Reel
MMUN5234DW	SOT-363	7L	22	47	3000/Tape&Reel
MMUN5235DW	SOT-363	7M	2.2	47	3000/Tape&Reel
MMUN5238DW	SOT-363	7Q	2.2	∞	3000/Tape&Reel
MMUN5241DW	SOT-363	7T	100	∞	3000/Tape&Reel






ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, common for Q_1 and Q_2 .) (Continued)

Parameter	Symbol	Min.	Max.	Unit
DC Current Gain at $V_{CE} = 10 \text{ V}$, $I_C = 5 \text{ mA}$	h_{FE}	35	-	-
MMUN5211DW	h_{FE}	60	-	-
MMUN5212DW	h_{FE}	80	-	-
MMUN5213DW	h_{FE}	80	-	-
MMUN5214DW	h_{FE}	160	-	-
MMUN5215DW	h_{FE}	160	-	-
MMUN5216DW	h_{FE}	3	-	-
MMUN5230DW	h_{FE}	8	-	-
MMUN5231DW	h_{FE}	15	-	-
MMUN5232DW	h_{FE}	80	-	-
MMUN5233DW	h_{FE}	80	-	-
MMUN5234DW	h_{FE}	80	-	-
MMUN5235DW	h_{FE}	160	-	-
MMUN5238DW	h_{FE}	160	-	-
MMUN5241DW	h_{FE}	-	-	-
Collector Base Cutoff Current at $V_{CB} = 50 \text{ V}$	I_{CBO}	-	100	nA
Collector Emitter Cutoff Current at $V_{CE} = 50 \text{ V}$	I_{CEO}	-	500	nA
Emitter Base Cutoff Current at $V_{EB} = 6 \text{ V}$	I_{EBO}	-	0.5	mA
MMUN5211DW	I_{EBO}	-	0.2	mA
MMUN5212DW	I_{EBO}	-	0.1	mA
MMUN5213DW	I_{EBO}	-	0.2	mA
MMUN5214DW	I_{EBO}	-	0.9	mA
MMUN5215DW	I_{EBO}	-	1.9	mA
MMUN5216DW	I_{EBO}	-	4.3	mA
MMUN5230DW	I_{EBO}	-	2.3	mA
MMUN5231DW	I_{EBO}	-	1.5	mA
MMUN5232DW	I_{EBO}	-	0.18	mA
MMUN5233DW	I_{EBO}	-	0.13	mA
MMUN5234DW	I_{EBO}	-	0.2	mA
MMUN5235DW	I_{EBO}	-	4	mA
MMUN5238DW	I_{EBO}	-	0.1	mA
MMUN5241DW	I_{EBO}	-	-	-
Collector Base Breakdown Voltage at $I_C = 10 \mu\text{A}$	$V_{(BR)CBO}$	50	-	V
Collector Emitter Breakdown Voltage at $I_C = 2 \text{ mA}$	$V_{(BR)CEO}$	50	-	V
Collector Emitter Saturation Voltage at $I_C = 10 \text{ mA}$, $I_B = 0.3 \text{ mA}$	V_{CEsat}	-	0.25	V
at $I_C = 10 \text{ mA}$, $I_B = 5 \text{ mA}$	V_{CEsat}	-	0.25	V
at $I_C = 10 \text{ mA}$, $I_B = 1 \text{ mA}$	V_{CEsat}	-	0.25	V
MMUN5230DW	V_{CEsat}	-	0.25	V
MMUN5231DW	V_{CEsat}	-	0.25	V
MMUN5215DW	V_{CEsat}	-	0.25	V
MMUN5216DW	V_{CEsat}	-	0.25	V
MMUN5232DW	V_{CEsat}	-	0.25	V
MMUN5233DW	V_{CEsat}	-	0.25	V
MMUN5234DW	V_{CEsat}	-	0.25	V
MMUN5235DW	V_{CEsat}	-	0.25	V
MMUN5238DW	V_{CEsat}	-	0.25	V

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise noted, common for Q_1 and Q_2)(Continued)

Parameter	Symbol	Min.	Max.	Unit
Output Voltage (on) at $V_{CC} = 5 \text{ V}$, $V_B = 2.5 \text{ V}$, $R_L = 1 \text{ k}\Omega$	V_{OL}	-	0.2	V
MMUN5211DW	V_{OL}	-	0.2	V
MMUN5212DW	V_{OL}	-	0.2	V
MMUN5214DW	V_{OL}	-	0.2	V
MMUN5215DW	V_{OL}	-	0.2	V
MMUN5216DW	V_{OL}	-	0.2	V
MMUN5230DW	V_{OL}	-	0.2	V
MMUN5231DW	V_{OL}	-	0.2	V
MMUN5232DW	V_{OL}	-	0.2	V
MMUN5233DW	V_{OL}	-	0.2	V
MMUN5234DW	V_{OL}	-	0.2	V
MMUN5235DW	V_{OL}	-	0.2	V
MMUN5238DW	V_{OL}	-	0.2	V
at $V_{CC} = 5 \text{ V}$, $V_B = 3.5 \text{ V}$, $R_L = 1 \text{ k}\Omega$	V_{OL}	-	0.2	V
at $V_{CC} = 5 \text{ V}$, $V_B = 5 \text{ V}$, $R_L = 1 \text{k}\Omega$	V_{OL}	-	0.2	V
MMUN5241DW	V_{OL}	-	0.2	V
Output Voltage (off)				
at $V_{CC} = 5 \text{ V}$, $V_B = 0.5 \text{ V}$, $R_L = 1 \text{ k}\Omega$	V_{OH}	4.9	-	V
at $V_{CC} = 5 \text{ V}$, $V_B = 0.05 \text{ V}$, $R_L = 1 \text{ k}\Omega$	V_{OH}	4.9	-	V
at $V_{CC} = 5 \text{ V}$, $V_B = 0.25 \text{ V}$, $R_L = 1 \text{ k}\Omega$	V_{OH}	4.9	-	V
MMUN5230DW	V_{OH}	4.9	-	V
MMUN5215DW	V_{OH}	4.9	-	V
MMUN5216DW	V_{OH}	4.9	-	V
MMUN5233DW	V_{OH}	4.9	-	V
MMUN5238DW	V_{OH}	4.9	-	V
Input Resistor	MMUN5211DW	R1	7	$\text{k}\Omega$
	MMUN5212DW	R1	15.4	$\text{k}\Omega$
	MMUN5213DW	R1	32.9	$\text{k}\Omega$
	MMUN5214DW	R1	7	$\text{k}\Omega$
	MMUN5215DW	R1	7	$\text{k}\Omega$
	MMUN5216DW	R1	3.3	$\text{k}\Omega$
	MMUN5230DW	R1	0.7	$\text{k}\Omega$
	MMUN5231DW	R1	1.5	$\text{k}\Omega$
	MMUN5232DW	R1	3.3	$\text{k}\Omega$
	MMUN5233DW	R1	3.3	$\text{k}\Omega$
	MMUN5234DW	R1	15.4	$\text{k}\Omega$
	MMUN5235DW	R1	1.54	$\text{k}\Omega$
	MMUN5238DW	R1	1.54	$\text{k}\Omega$
	MMUN5241DW	R1	70	$\text{k}\Omega$
Resistor Ratio	MMUN5211DW/MMUN5212DW/MMUN5213DW	R1/R2	0.8	1.2
	MMUN5214DW	R1/R2	0.17	0.25
	MMUN5215DW/MMUN5216DW/MMUN5238DW	R1/R2	-	-
	MMUN5241DW	R1/R2	-	-
	MMUN5230DW/MMUN5231DW/MMUN5232DW	R1/R2	0.8	1.2
	MMUN5233DW	R1/R2	0.055	0.185
	MMUN5234DW	R1/R2	0.38	0.56
	MMUN5235DW	R1/R2	0.038	0.056

TYPICAL ELECTRICAL CHARACTERISTICS – MMUN5211DW

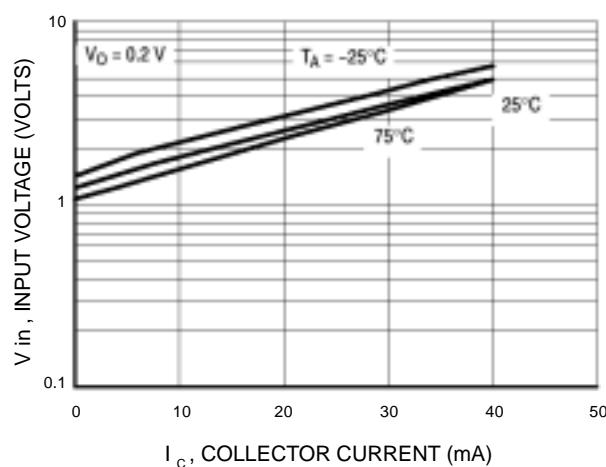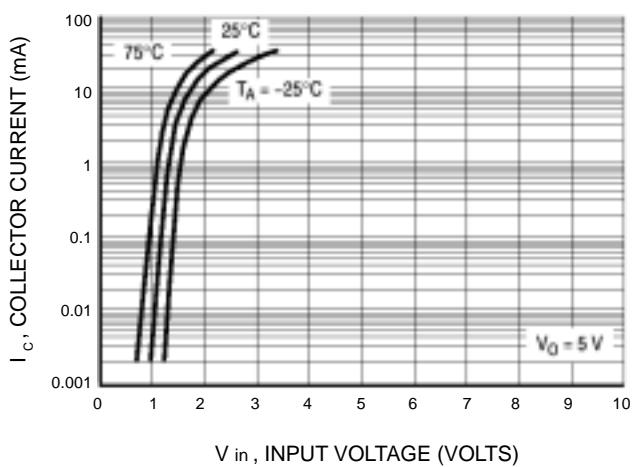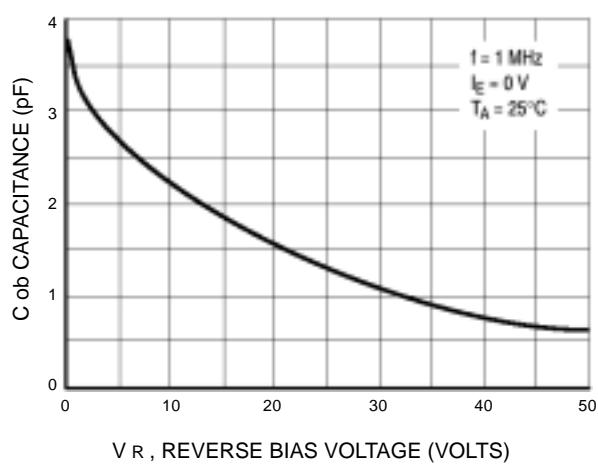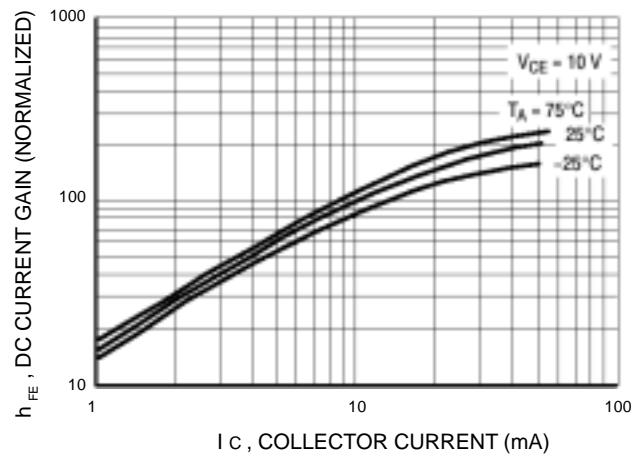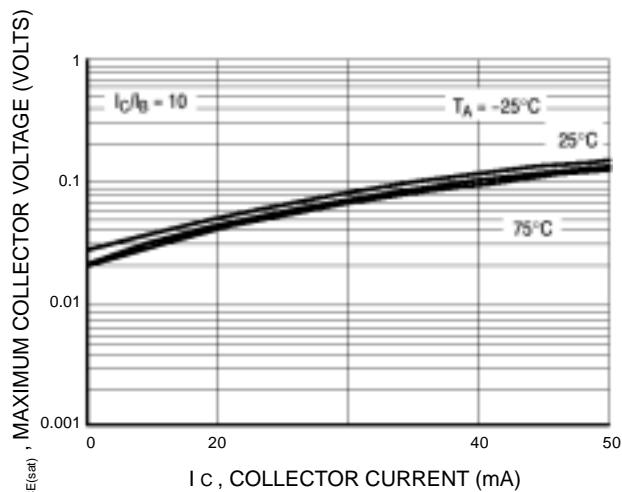

SOT-363 Package Outline Dimensions

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - Pre-Biased category:

Click to view products by Hong Kong Chuangji manufacturer:

Other Similar products are found below :

[DRC9A14E0L](#) [DTA124GKAT146](#) [DTA144WETL](#) [DTA144WKAT146](#) [DTC113EET1G](#) [DTC115TETL](#) [DTC115TKAT146](#)
[DTC144VUAT106](#) [MUN5241T1G](#) [BCR158WH6327XTSA1](#) [SMUN5330DW1T1G](#) [RN1306\(TE85L,F\)](#) [EMH15T2R](#) [NSBC143ZPDP6T5G](#)
[DTC114EUA-TP](#) [SMUN5237DW1T1G](#) [SMUN5213DW1T1G](#) [SMUN5114DW1T1G](#) [DTC124ECA-TP](#) [DTA114ECA-TP](#) [DTC113EM3T5G](#)
[NSVMUN5135DW1T1G](#) [NSVMUN2237T1G](#) [NSVDTC143ZM3T5G](#) [SMUN5335DW1T2G](#) [SMUN5216DW1T1G](#) [NSVMUN5316DW1T1G](#)
[NSVMUN5215DW1T1G](#) [NSVMUN5213DW1T3G](#) [NSVIMD10AMT1G](#) [NSVEMC2DXV5T1G](#) [NSVDTC144WET1G](#) [NSVDTC123JET1G](#)
[NSVDTA143EM3T5G](#) [NSVB1706DMW5T1G](#) [NSBC143EDP6T5G](#) [NSBA144wdxv6t1g](#) [DTA115TET1G](#) [NSBC115TDP6T5G](#)
[NSBA113EF3T5G](#) [MUN2235T1G](#) [NSBC143ZDXV6T5G](#) [NSVDTA114EM3T5G](#) [MUN2138T1G](#) [DCX124EUQ-7-F](#) [MUN2141T1G](#)
[DTC144TET1G](#) [MUN2238T1G](#) [SMUN5112DW1T1G](#) [NSVMUN5131T1G](#)