

HVB-2314KPX



2314 MINITOP 系列产品 / Products Series

具有高发光效率、高一致性、高稳定性、高可靠性，主要用于汽车应用

High luminous efficiency, consistency, stability and reliability, it is mainly used in automobile applications.

特征

- 外观：白色PPA塑料，树脂封装
- 50% I_v 视角：120°
- 颜色：蓝色（464~476nm）
- 资格：可靠性测试符合AEC Q102
- 潮湿敏感等级-2

Features

- Package: Silicone in white PPA cup
- Viewing angle at 50% I_v : 120°
- Color: Blue (464~476nm)
- Qualifications: Reliability test compliance with AEC Q102
- MSL-2

应用

- 信号灯
- 汽车内外部照明应用

Applications

- Signaling
- Interior and exterior lighting for automotive

订购信息 / Ordering Information

| 型号 Type | | | | 发光强度 Luminous Intensity $I_v @ I_f = 20\text{mA}$ | 订购编号 Ordering Code |
|-------------|---|-------------------|--------------|---|-----------------------|
| HVB-2314KPX | - | XXXX | - XX - XXXX | | |
| | | I | I | | |
| | | 亮度档 Brightness | 颜色档 Color | 电压档 Forward Voltage | 180 - 450 mcd |
| | | | | | XXXXXX |

备注

■ 亮度档

单个最小包装只装有同一个亮度档次的产品，具体分档信息请见第4页

例如：HVB-2314KPX-S1T2-XX-XXXX，单个卷盘中的产品只有S1、S2、T1、T2中的某一档

■ 颜色档

单个最小包装只装有同一个颜色档次的产品，具体分档信息请见第4页

例如：HVB-2314KPX-XXXX-35-XXXX，单个卷盘中的产品只有3、4、5中的某一档

■ 正向电压档

单个最小包装只装有同一个正向电压档次的产品，具体分档信息请见第4页

例如：HVB-2314KPX-XXXX-XX-36，单个卷盘中的产品只有3、4、5、6中的某一档

Note

■ Brightness Grouping

Only one brightness group will be packed in one reel. Please refer to page #4 for details.

E.g. : HVB-2314KPX-S1T2-XX-XXXX, means only one bin of S1、S2、T1 or T2 is in one reel.

■ Color Groups

Only one color group will be packed in one reel. Please refer to page #4 for details.

E.g. : HVB-2314KPX-XXXX-35-XXXX, means only one bin of 3、4 or 5 is in one reel.

■ Forward Voltage Groups

Only one forward voltage group will be packed in one reel. Please refer to page #4 for details.

E.g. : HVB-2314KPX-XXXX-XX-36, means only one bin of 3, 4, 5 or 6 is in one reel.

极限参数 / Maximum Ratings

| 参数 Parameters | 符号 Symbol | 数值 Rating | 单位 Unit |
|---|--------------|---|------------|
| 结温 / Junction Temperature | T_j | 125 | °C |
| 正向电流 / Forward Current ($T_s=25^\circ\text{C}$) | I_f | 30 | mA |
| 峰值正向电流 Peak Forward Current ($t \leq 10\mu\text{s}$; $D=0.005$; $T_s=25^\circ\text{C}$) | I_{fp} | 100 | mA |
| 反向电压 / Reverse Voltage ($T_s=25^\circ\text{C}$) | V_r | 不适用于反向操作 Not designed for reverse operation | V |
| 抗静电能力 Electrostatic Discharge (HBM) | V_{ESD} | 2000 | V |
| 操作温度 / Operating Temperature | T_{opr} | -40 ~ + 100 | °C |
| 储存温度 / Storage Temperature | T_{stg} | -40 ~ + 100 | °C |

特性 / Characteristics ($T_s = 25^\circ\text{C}$; $I_f = 20\text{ mA}$)

| 参数 Parameters | 符号 Symbol | 数值 Rating | 单位 Unit |
|---|-------------------------|--------------|------------|
| 峰值波长 / Wavelength at Peak Emission | typ. λ_{peak} | 465 | nm |
| | min. λ_{dom} | 464 | nm |
| 主波长 / Dominant Wavelength | typ. λ_{dom} | 468 | nm |
| | max. λ_{dom} | 476 | nm |
| 半波宽 / Spectral Bandwidth at 50% I_{rel} max | typ. $\Delta\lambda$ | 17.5 | nm |
| 50 % I_v 下的视角 / Viewing Angle at 50 % I_v | typ. 2Φ | 120 | ° |
| | min. V_f | 2.60 | V |
| 正向电压 / Forward Voltage | typ. V_f | 3.20 | V |
| | max. V_f | 3.80 | V |
| 反向电压 / Reverse Voltage (V_r) =5V | typ. I_r | 0.2 | uA |
| | Max. I_r | 10 | uA |
| 实际热阻值 (PN结-焊点) / Real Thermal Resistance (Junction / Solder Point) | max. $R_{th JS_{real}}$ | 330 | °C/W |

亮度分档 / Brightness Grouping ($T_s = 25\text{ }^\circ\text{C}$; $I_f = 20\text{ mA}$)

| 档次 Grouping | 发光强度 Luminous Intensity I_v (min.) | 发光强度 Luminous Intensity I_v (max.) |
|----------------|--|--|
| S1 | 180 mcd | 224 mcd |
| S2 | 224 mcd | 280 mcd |
| T1 | 280 mcd | 355mcd |
| T2 | 355 mcd | 450 mcd |

正向电压分档 / Forward Voltage Grouping ($T_s = 25\text{ }^\circ\text{C}$; $I_f = 20\text{ mA}$)

| 档次 Grouping | 正向电压 Forward Voltage V_f (min.) | 正向电压 Forward Voltage V_f (max.) |
|----------------|---|---|
| 3 | 2.60 V | 2.90 V |
| 4 | 2.90 V | 3.20 V |
| 5 | 3.20 V | 3.50 V |
| 6 | 3.50 V | 3.80 V |

主波长分档 / Dominant Wavelength Grouping ($T_s = 25\text{ }^\circ\text{C}$; $I_f = 20\text{ mA}$)

| 档次 Grouping | 主波长 Dominant Wavelength λ_{dom} (min.) | 主波长 Dominant Wavelength λ_{dom} (max.) |
|----------------|---|---|
| 3 | 464 nm | 468 nm |
| 4 | 468 nm | 472 nm |
| 5 | 472 nm | 476 nm |

标签信息 / Information on Label


例 / E. g. : T2-4-8B

| 亮度档 / Brightness | 颜色 / Color | 正向电压 / Forward Voltage |
|------------------|------------|------------------------|
| T2 | 4 | 8B |

相对发射光谱 - $V(\lambda)$ = 标准人眼视觉曲线


Relative Spectral Emission - $V(\lambda)$ = Standard Eye Response Curve

$I_{rel} = f(\lambda)$; $T_s = 25\text{ }^\circ\text{C}$; $I_f = 20\text{ mA}$

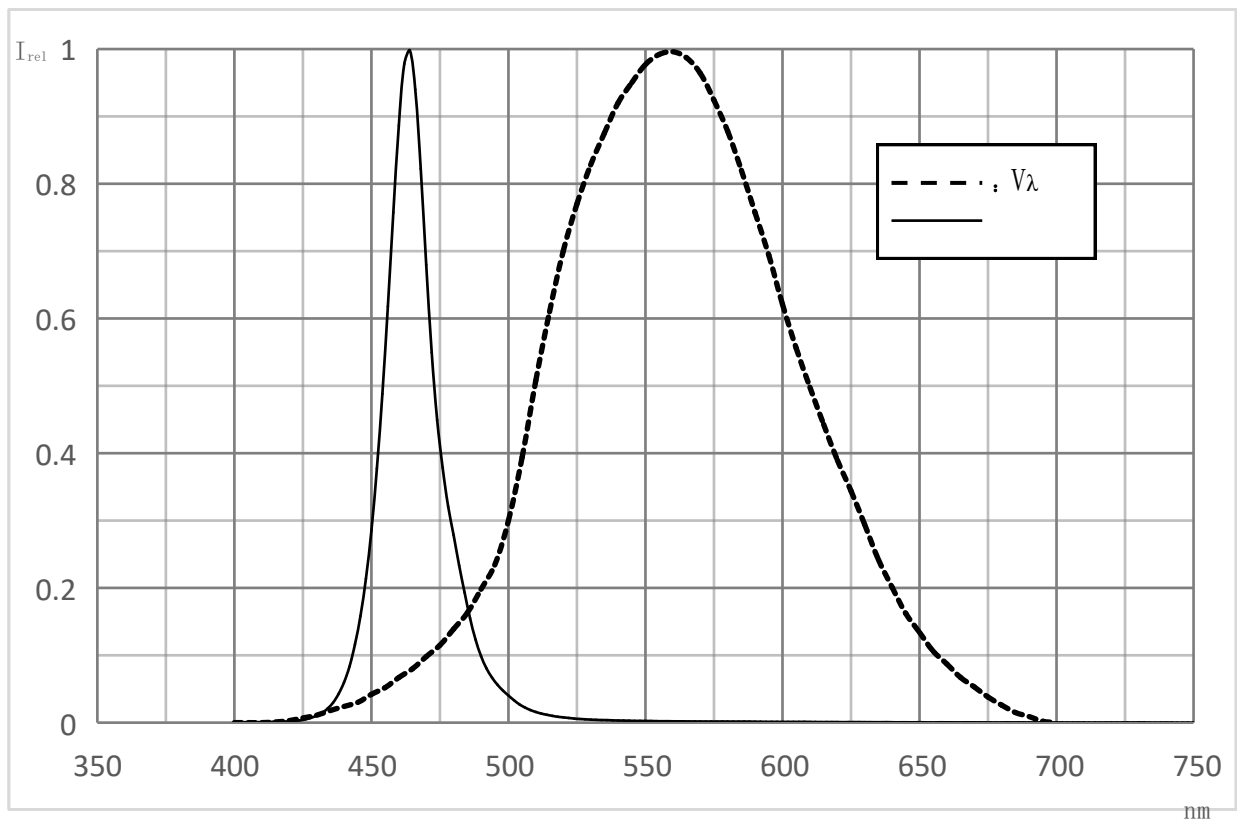


辐射特性 / Radiation Characteristics

$I_{rel} = f(\phi); T_s = 25\text{ }^\circ\text{C}$

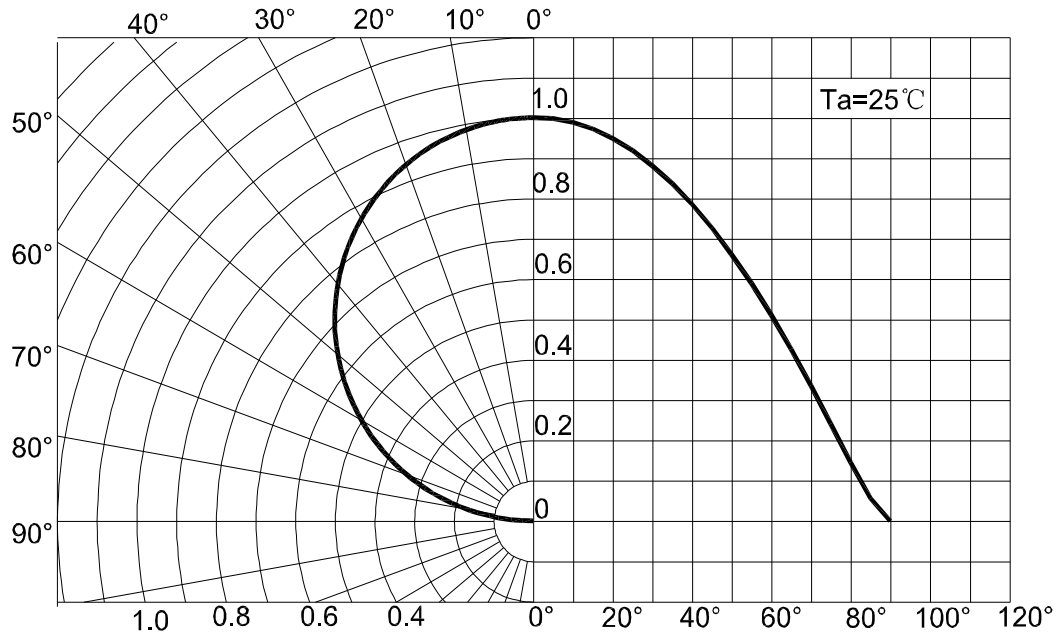


正向电流 / Forward Current

$I_f = f(V_f); T_a = 25\text{ }^\circ\text{C}$

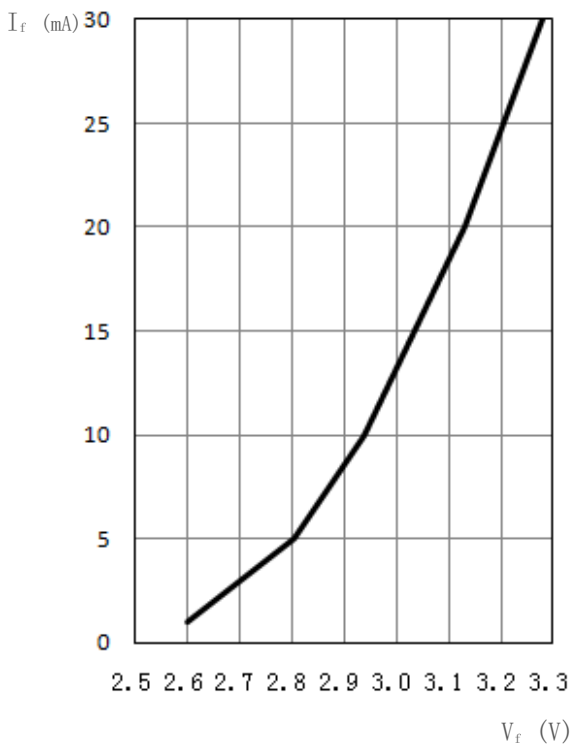


相对亮度特性曲线 / Relative Luminous Intensity


$I_v / I_v(20\text{ mA}) = f(I_f); T_a = 25\text{ }^\circ\text{C}$

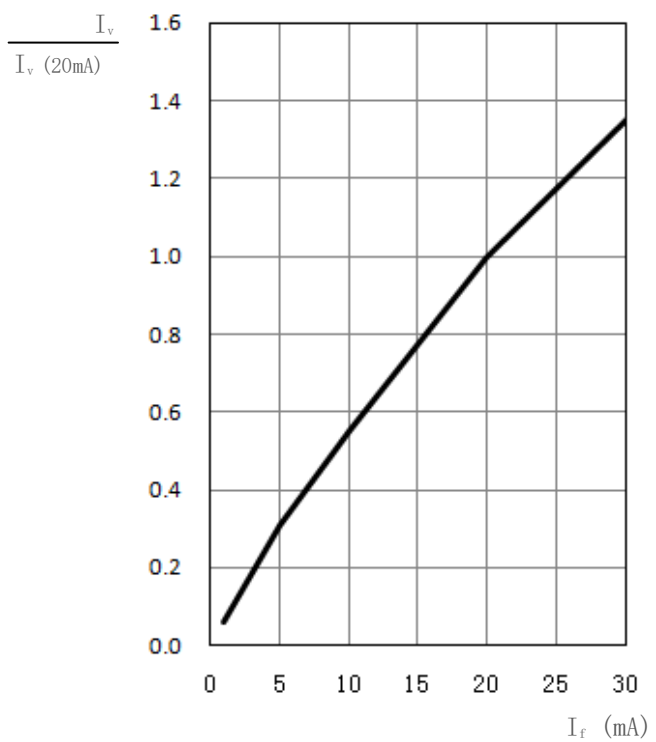


相对正向电压 / Relative Forward Voltage
 $\Delta V_f = V_f - V_f(25^\circ\text{C}) = f(T_j); I_f = 20\text{ mA}$

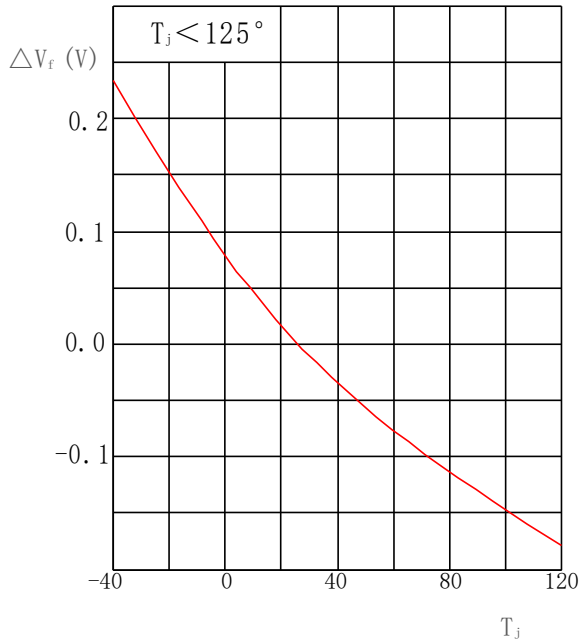


相对发光强度 / Relative Luminous Intensity
 $I_v / I_v(25^\circ\text{C}) = f(T_j); I_f = 20\text{ mA}$

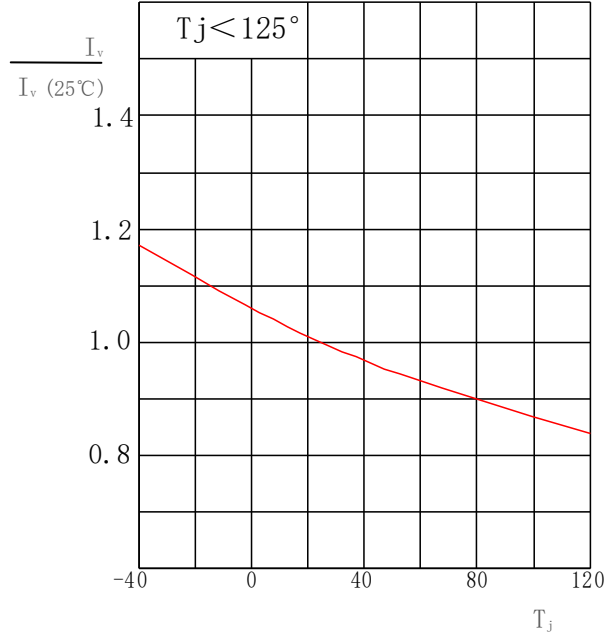


环境温度与正向电流
 Ambient Temperature vs. Forward Current
 $I_f = f(T_a)$

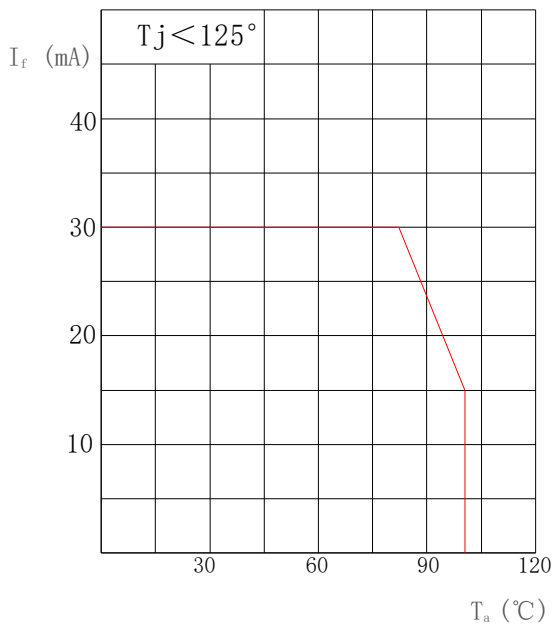

焊点温度与正向电流 / Solder Point Temperature vs. Forward Current
 $I_f = f(T_s)$

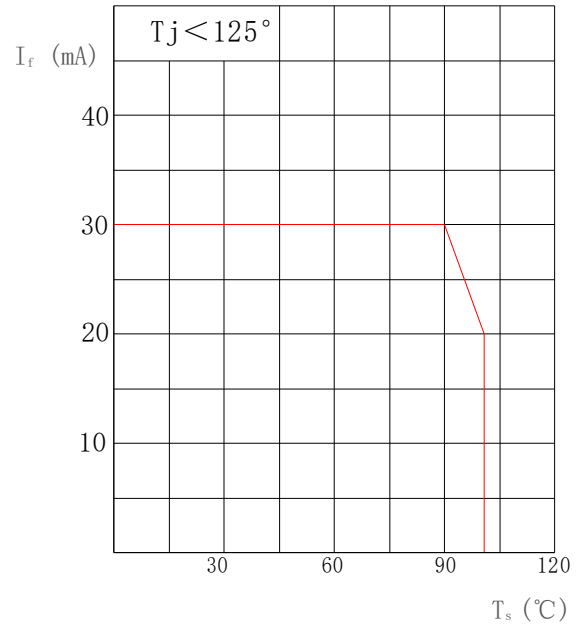

产品尺寸 / Package Outline

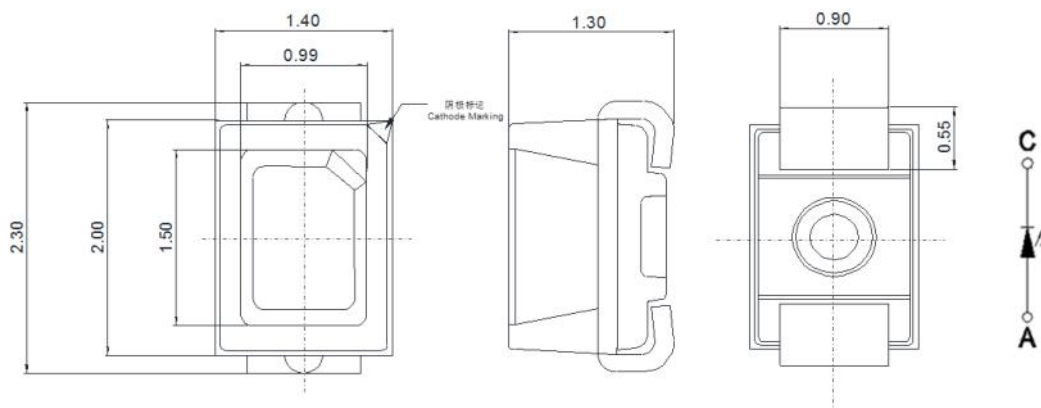


备注

- 统计质量: 10mg
- 标 记: 负极

NOTE

- Approximate Weight: 10mg
- Mark: Cathode

推荐焊盘 / Recommended Solder Pad

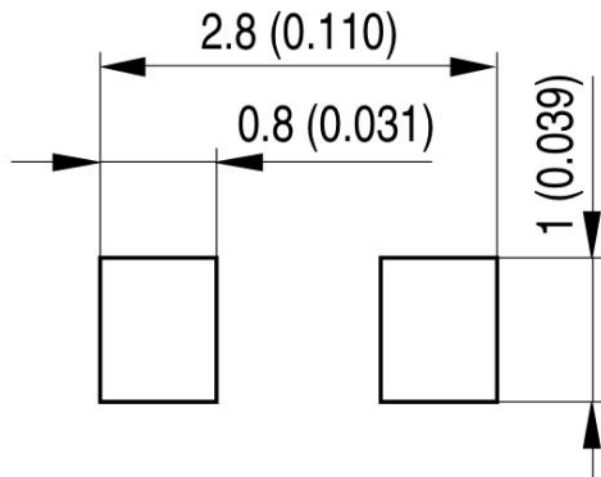


注释

- 不适合超声波清洗的封装

NOTE


- Package not suitable for ultrasonic cleaning

回流焊要求 / Reflow Soldering Profile

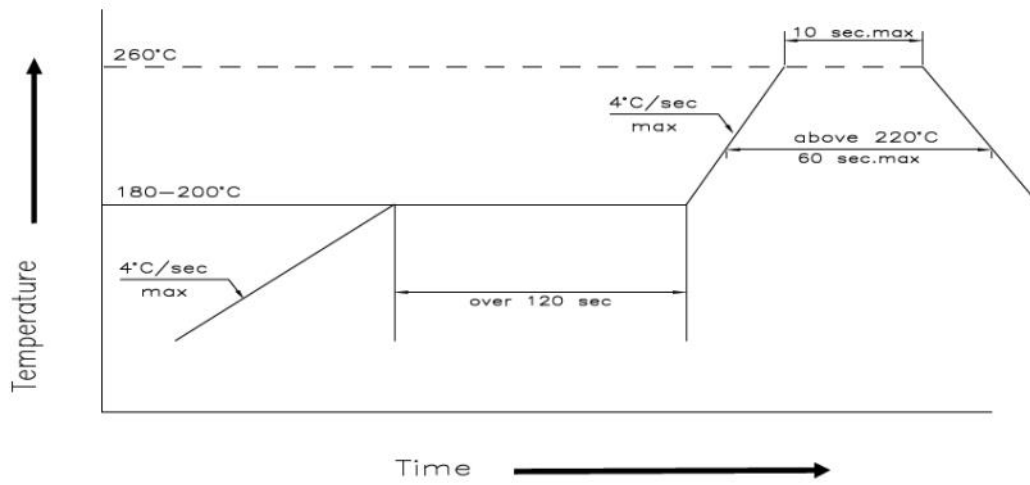

| 主要特性 Profile Feature | 符号 Symbol | 无铅焊接 Pb-Free Assembly | | | 单位 Unit |
|--|--------------|--------------------------|------|------|------------|
| | | min. | rec. | max. | |
| 预热升温速率 Ramp-up Rate to Preheat 25°C-150°C | - | - | 2 | 3 | °C/s |
| 时间 / Time (T_{smin} to T_{smax}) | T_s | 60 | 100 | 120 | s |
| 峰值升温速率 Ramp-up Rate to Peak (T_{smax} to T_p) | - | - | 2 | 3 | °C/s |
| 熔点温度 Liquidus Temperature | T_l | | 217 | | °C |
| 高于熔点温度的时间 Time above Liquidus Temperature | t_l | - | 80 | 100 | s |
| 峰值温度 / Peak Temperature | T_p | - | 255 | 260 | °C |
| 规定的峰值温度±5°C以内的时间 Time within 5°C of the Specified Peak Temperature | t_p | 10 | 20 | 30 | s |
| 降温速率 / Ramp-down Rate (T_p to 100°C) | - | - | 3 | 6 | °C/s |
| 时间 / Time (25°C to T_p) | - | - | - | 480 | s |

卷带与卷盘 / Tape and Reel

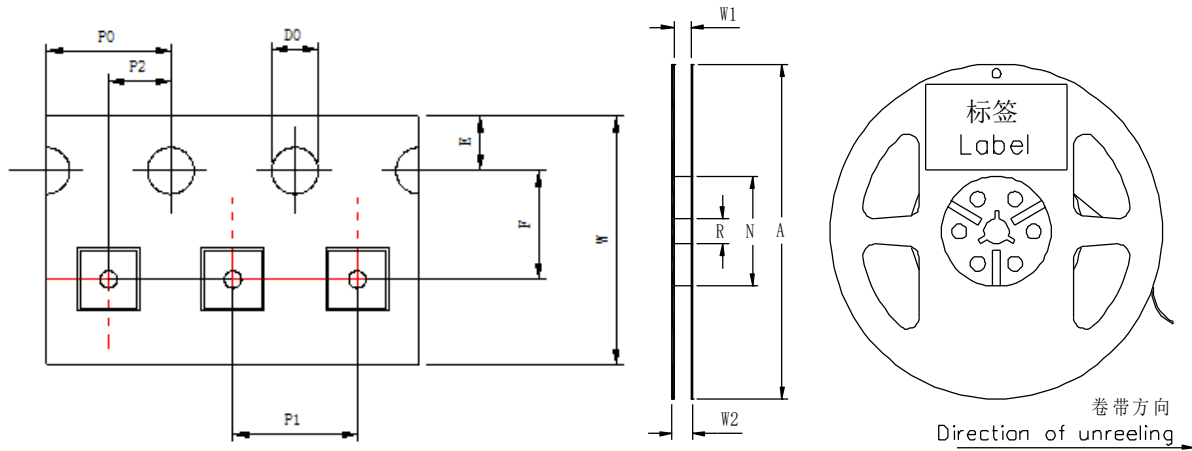

前端空带：最小400 mm；尾端空带： 最小160 mm；尺寸符合： IEC 60286-3, EIA 481-D标准
 Leader: min. 400 mm; Trailer: min. 160 mm; Requirement acc. to IEC 60286-3, EIA 481-D

卷带尺寸 / Tape Dimensions (mm)

| W | P0 | P1 | P2 | D0 | E | F |
|-------|-------|-------|--------|----------|----------|----------|
| 8±0.1 | 4±0.1 | 4±0.1 | 2±0.05 | 1.5±0.05 | 1.75±0.1 | 3.5±0.05 |

卷盘尺寸 / Reel Dimensions (mm)

| A | W1 | W2 | N | R |
|-------|---------|----------|----------|----------|
| 177.8 | 9.3±0.3 | 11.2±0.3 | 58.5±0.2 | 13.5±0.2 |


数量 (颗/卷) / Quantity (pcs/reel)

3000

条形码标签 / Barcode-Product-Label (BPL)



包装材料及过程 / Dry Packing Process and Materials

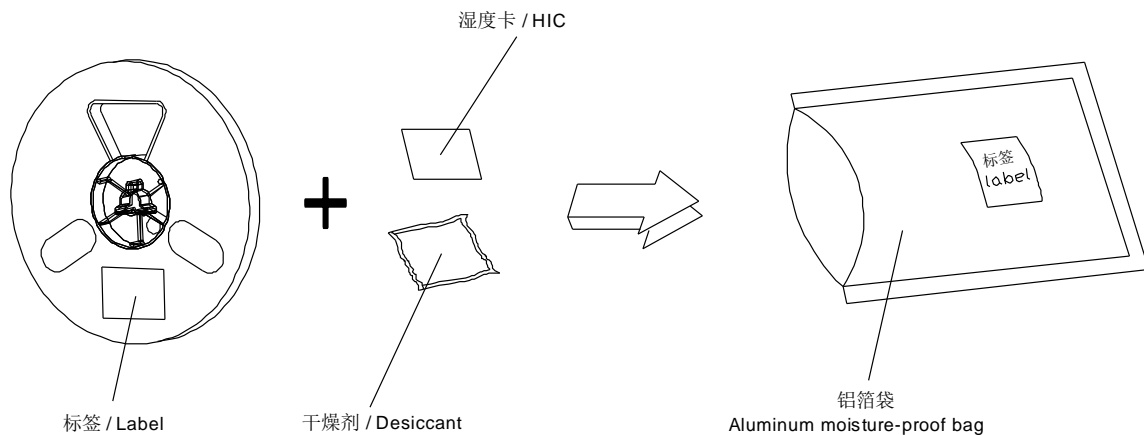


备注

产品包装在一个干燥的铝箔袋里，同时内附有干燥剂和湿度卡。
对于干燥包装，您可以从网络或JEDEC标准里获取。

NOTE

Moisture-sensitive product is packed in a dry bag containing desiccant and HIC (humidity indicator card).
Regarding dry pack you may find further information in the internet or JEDEC.

出货包装及材料 / Transportation Packing and Materials

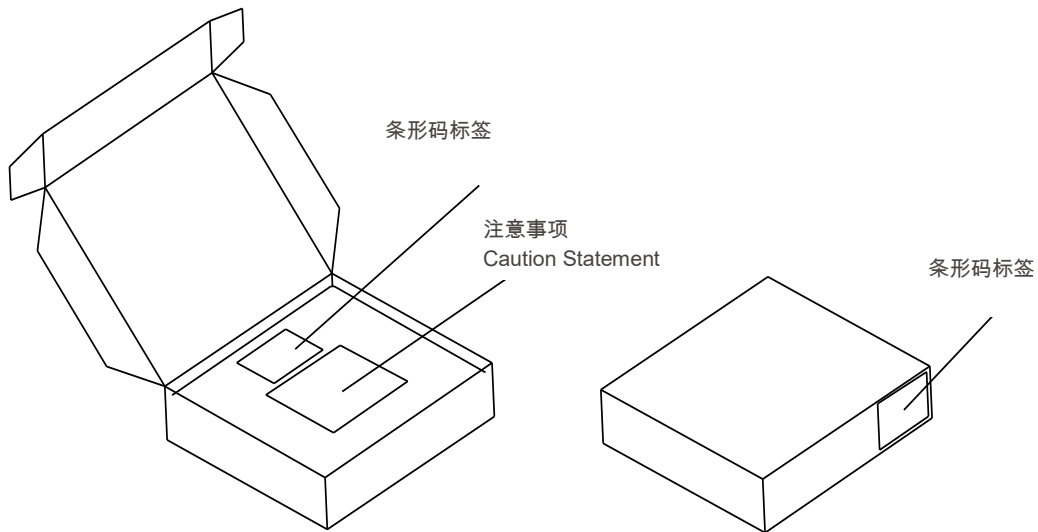

出货箱尺寸 / Dimensions of Transportation Box (mm)

| 宽度 / Width | 长度 / Length | 高度 / Height |
|------------|-------------|-------------|
| 256±5 | 223±5 | 62±5 |
| 256±5 | 223±5 | 124±5 |

注释

典型值： 每个产品的实际值可能与这些统计出的典型值不同。

公差： 除非图纸中有说明，公差默认为 ± 0.1 mm。

正向电压： 正向电压是在8ms脉冲电流并且内部再现性为 ± 0.05 V和一个 ± 0.1 V的外在不确定性（按照GUM K=3因子）来进行测试的。

波长： 波长是在25ms脉冲电流并且内部再现性为 ± 0.5 nm和一个 ± 1 nm的外在不确定性（按照GUM K=3因子）来进行测试的。

亮度： 亮度是在25ms脉冲电流并且内部再现性为 $\pm 8\%$ 和一个 $\pm 11\%$ 的外在不确定性（按照GUM K=3因子）来进行测试的。

特殊声明： 本版本最终解释权归属鸿利智汇，当中英文意思发生歧义时，以中文为准。

Glossary

Typical Values: Actual values of each product may differ from these statistical values .

Tolerance of Measure: Unless otherwise noted in drawing, tolerances are specified with +/-0.1mm.

Forward Voltage: The forward voltage is measured during a current pulse of typically 8 ms, with an internal reproducibility of ± 0.05 V and an expanded uncertainty of ± 0.1 V (acc. to GUM with a coverage factor of $k = 3$).

Wavelength: The wavelength is measured at a current pulse of typically 25 ms, with an internal reproducibility of ± 0.5 nm and an expanded uncertainty of ± 1 nm (acc. to GUM with a coverage factor of $k = 3$).

Brightness: Brightness values are measured during a current pulse of typically 25 ms, with an internal reproducibility of $\pm 8\%$ and an expanded uncertainty of $\pm 11\%$ (acc. to GUM with a coverage factor of $k = 3$).

Special Statement: The final interpretation of this specification shall be vested in Hongli-tronic, in the case of ambiguity, the Chinese version shall prevail.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard LEDs - SMD category](#):

Click to view products by [HONGLITRONIC manufacturer](#):

Other Similar products are found below :

[LTST-C190KYKT](#) [LTST-C19GD2WT](#) [LTST-N683GBEW](#) [LTW-170ZDC](#) [LTW-M140SZS40](#) [LTW-M140ZVS](#) [598-8110-100F](#) [598-8170-100F](#) [598-8610-202F](#) [AAAF5060QBFSEEZGS](#) [ALMD-LB36-SV002](#) [APT1608QGWW](#) [EAST2012YA0](#) [EASV1803BA0](#) [SML-512VWT86A](#) [SML-LX0606SISUGC/A](#) [SML-LXL1307SRC-TR](#) [SML-LXR851SIUPGUBC](#) [LT1ED53A](#) [AM27ZGC03](#) [APB3025SGNC](#) [APFA3010SURKCGKQBDC](#) [APHK1608VGCA](#) [APT2012QGWW](#) [CLX6D-FKB-CN1R1H1BB7D3D3](#) [LTST-008BGEW](#) [LTW-020ZDCG](#) [LTW-21TS5](#) [LTW-220DS5](#) [598-8330-117F](#) [SML-LX0402IC-TR](#) [CMDA20AYAA7D1S](#) [CMDA16AYDR7A1X](#) [91-21SYGD/S530-E2/TR7](#) [598-8040-100F](#) [598-8070-100F](#) [598-8140-100F](#) [598-8610-200F](#) [EAST2012GA0](#) [EAPL3527GA5](#) [SML-LXL1209SYC/ATR](#) [EAST2012RA0](#) [CMD91-21VRC/TR7](#) [SML-LXR851SGSIC-TR](#) [SML-512PWT86A](#) [SMF-2432GYC-TR](#) [LTST-C194TBKT-5A](#) [CLX6E-FKC-CH1M1D1BB7C3D3](#) [SML-LXL0805USBC-TR](#) [SML-LX2835SYSUGCTR](#)