



HL-304PT1C-T



Features


- Mechanically and spectrally matchend to the infrared emitting LED LAMP.
- Color Transparent Lens.
- Rohs compliant.

Package Dimensions

Description

Made with NPN silicon phototransistor chips.

- 1: ANODE
2: CATHODE

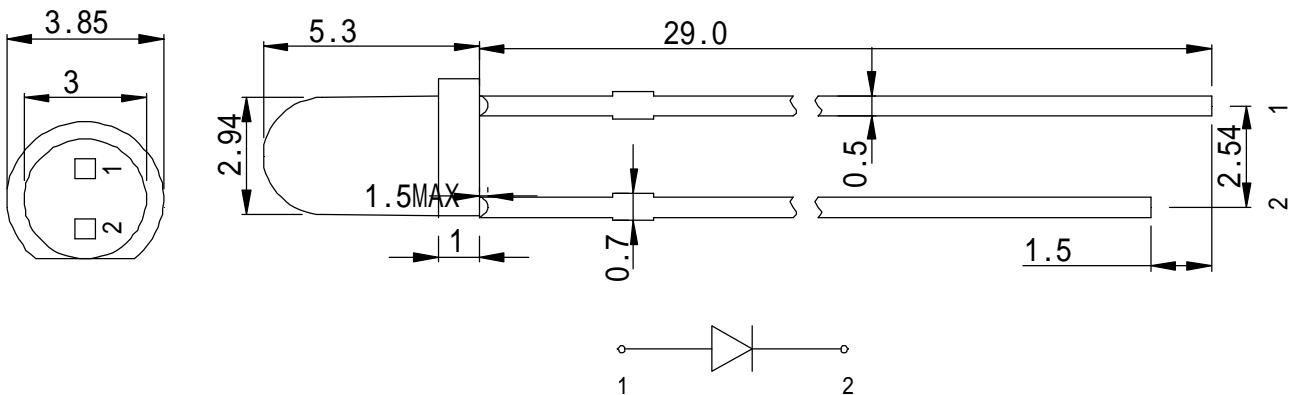

Tolerance Grade	Dimension Tolerance (UNIT:mm)			
	0.5~3	3~6	6~30	30~120
	±0.1	±0.2	±0.3	±0.5

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Min	Typ	Max	Units	Test Conditions
$V_{BR\ CE0}$	Collector-Emitter Breakdown Voltage	30	-	100	V	$I_C=100\mu A$ $E_e=0mW/cm^2$
$V_{BR\ ECO}$	Emitter-to-Collector Breakdown Voltage	6.5	-	-	V	$I_e=100\mu A$ $E_e=0mW/cm^2$
$V_{CE(SAT)}$	Collector-to-Emitter Saturation Voltage	-	-	0.2	V	$I_C=100\mu A$ $E_e=20mW/cm^2$
I_{CEO}	Collector Dark Current	-	-	100	nA	$V_{CE}=100\mu A$ $E_e=0mW/cm^2$
T_R	Rise Time (10% to 90%)	-	15	-	us	$V_{CE}=5V$ $I_C=1mA$ $R_L=1000\Omega$
T_F	Fall Time (90% to 10%)	-	15	-	us	
$I_{(ON)}$	On State Collector Current	0.1	0.5	-	mA	$V_{CE}=5V$ $E_e=1mW/cm^2$ $\lambda=940nm$

Absolute Maximum ratings at Ta=25°C

Parameter	Max Ratings
Collector-to-Emitter Breakdown Voltage	30V
Emitter-to-Collector Breakdown Voltage	6.5V
Power Dissipation at (or below) 25°C Free Air Temperature	100mW
Operating Temperature Range	-30°C~80°C
Storage Temperature Range	-30°C~80°C
Lead Soldering Temperature (>3mm for 5sec)	260°C

Soldering:

1. Manual Of Soldering


The temperature of the iron tip should not be higher than 300°C and Soldering within 3 seconds per solder-land is to be observed.

2. DIP soldering (Wave Soldering):

Preheating: 120°C~150°C, within 120~180 sec.

Operation heating: 245°C ± 5°C within 5 sec. 260°C (Max)

Gradual Cooling (Avoid quenching).

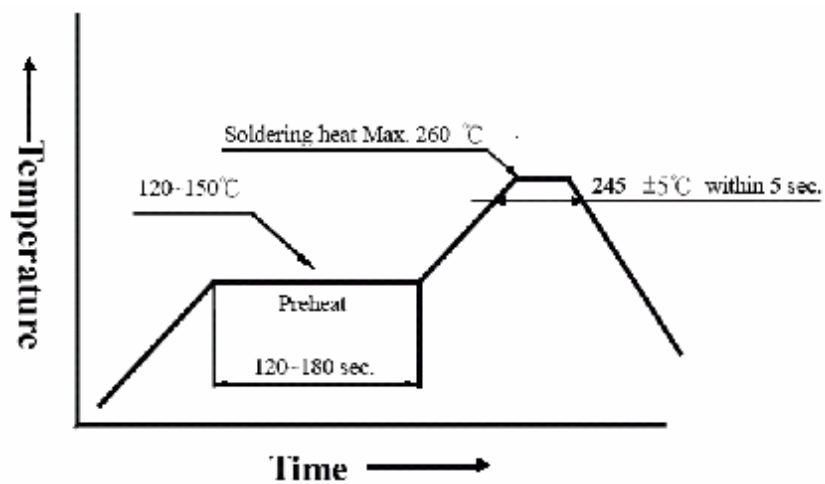

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Infrared Receivers](#) category:

Click to view products by [Hongli Zhihui](#) manufacturer:

Other Similar products are found below :

[TSOP38436](#) [TSOP6136TR](#) [TSOP2456](#) [TSOP31456](#) [TSOP34356](#) [TSOP34456](#) [TSOP38336](#) [TSOP6130TT](#) [TSOP6940TT](#) [TSOP34438SS1V](#)
[GP1UX511QS](#) [TSOP34336SS1F](#) [TSSP57038ETT1](#) [TSOP57438ETT1](#) [TSOP37438HTT1](#) [TSOP6140TR](#) [TSOP53356](#) [TSOP53238](#)
[TSOP33238](#) [TSOP33256](#) [TSOP53256](#) [TSOP33138](#) [TSOP6133TT](#) [HL-PST-1608PT1F](#) [PT2424-6B](#) [TSOP37540QHTT1](#)
[E6C0805PRAC1UDA](#) [TSOP31136](#) [TSOP31140](#) [TSOP75238WTT](#) [RPM5537-H14E2A](#) [RPM6937-V4](#) [RPM7136-H4R](#) [RPM7238-H5R](#)
[TSOP4156](#) [TSOP6156TR](#) [TSOP75336WTT](#) [TSOP75338TR](#) [TSSP77038TT](#) [PD70-01C/TR7](#) [TSOP38138](#) [TSSP57P38TT1](#) [GP1UE292QKVF](#)
[GP1UM281XKVF](#) [GP1UM287RKVF](#) [GP1UM287XK](#) [TSOP59438](#) [TSOP58336](#) [TSOP38156](#) [PT19-21B/L41/TR8](#)