


## 技术参数 SPECIFICATIONS



- 适用线规 (Applicable wires) : AWG24#~16#
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 300V.Ac/Dc
- 额定电流 (Current rating) : 15A max
- 接触电阻 (Contact resistance) : ≤0.01Ω
- 绝缘电阻 (Insulation resistance) : ≥1000MΩ
- 耐压 (Withstand voltage) : 2000V.Ac/1min
- 材料 (Material) :
  - 壳体 (Housing) : 尼龙 (PA66) UL94V-2 (0)
  - 端子 (Terminal) : 黄铜 (Brass Tin/plated)
  - 磷青铜 (phos.bronze Tin/plated)

### .187" /250# 端子 TERMINAL

型号 Type	适用线规 Applicable wires	材料 Material	尺寸 Dimensions (mm)				示意图 Sample	数量 Quantity		
			mm <sup>2</sup>	AWG#	W	L			E	材料厚度 Thickness
HX480N-01T	STO-01T-187N		0.2~0.5	24~20	5.7	15.0	6.5	0.35	A	10000PCS/卷
HX480N-41T	STO-41T-187N	黄铜 Brass	0.5~1.25	20~16	5.7	15.0	6.5	0.35	A	10000PCS/卷
HX480N-61T	STO-61T-187N		(UL1015) 20+18		5.7	15.0	6.5	0.35		10000PCS/卷
HX4.8Z-21T	730494-3	磷青铜 Phos.bronze	0.5~1.25	20~16	5.6	18.0	6.0	0.3	B	2500PCS/盒

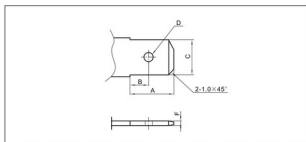

型号 Type	尺寸 Dimensions (mm)				
	A	B	C	D	F
.187"	7.0	3.6	4.8	φ1.5	0.5

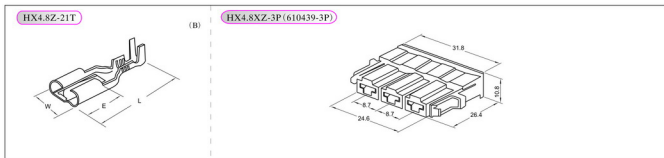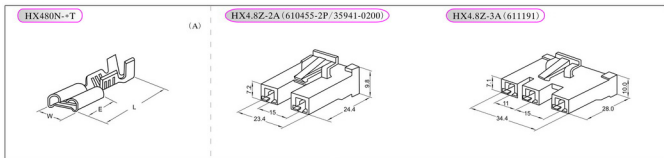

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminals](#) category:*

*Click to view products by [Hongxing](#) manufacturer:*

Other Similar products are found below :

[HT-13-10](#) [71M-250-32-NB](#) [01-2065-1-0216](#) [00581P0075](#) [M10-10RX](#) [M10BCK](#) [60205-1](#) [604200-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [60873-1](#) [M14-516R/SK](#) [M14-6RSX](#) [M18-10FLX](#) [M18-8FBX](#) [M18-8R/LX](#) [M18BCK](#) [61314-6-C](#) [61-S](#) [61-SN-A](#) [62-NBM-A](#) [63-S](#) [640179-1](#) [640917-2-CUT-TAPE](#) [6501550002](#) [66107-2-C](#) [66107-4-C](#) [696683-1](#) [696834-1](#) [696861-1](#) [696931-1](#) [696999-1](#) [M8-516RK](#) [M86700006](#) [MA250DMFMX-A](#) [701-2007](#) [701-2307](#) [701-7761-03](#) [70F-110-32-PB](#) [718-N-A](#) [71M-187-20-NBL](#) [71M-250-32-NBL](#) [72F-187-20-NBL](#) [72M-250-32-NBL](#) [7310](#) [73F-250-32](#) [73F-250-32-NBL](#) [73F-250-32-NL](#) [F14-10C](#) [F-1M](#)