



技术参数 SPECIFICATIONS

- 适用线规 (Applicable wires) : AWG24#~14#
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 300V.Ac/Dc
- 额定电流 (Current rating) : 15A max
- 接触电阻 (Contact resistance) : $\leq 0.01\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 2000V.Ac/1min
- 材料 (Material) :
 - 壳体 (Housing) : 尼龙 (PA66) UL94V-0
 - 端子 (Terminal) : 黄铜 (Brass Tin/plated)


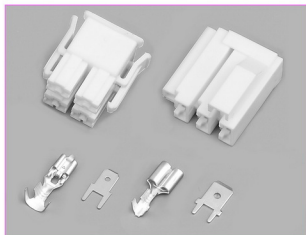


.187"/.250" 端子 TERMINAL

型号 Type	适用线规 Applicable wires	mm ²	AWG#	材料 Material	尺寸 Dimensions (mm)				示例 Sample	数量 Quantity
					W	L	E	材料厚度 Thickness		
HX4.8S-01T	730567-3	0.22~0.5	24~20		5.6	19.3	5.1	0.3	A	10000PCS/包
HX4.8S-21T	730568-3	0.55~1.28	20~16	黄铜 Brass	5.6	19.3	5.1	0.3		8000PCS/包
HX4.8S-41T	730569-3	0.76~2.09	18~14		5.6	19.3	5.1	0.3		6000PCS/包
HX6.3Z-21PT	35725-4210	0.55~1.28	20~16	黄铜 Brass	7.5	18.5	7.7	0.4	B	

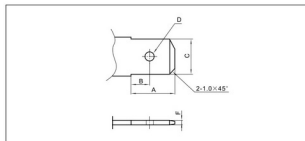

型号 Type	尺寸 Dimensions (mm)				
	A	B	C	D	F
.187"	7.0	3.6	4.8	φ1.5	0.5
.250"	8.3	3.8	6.35	φ2.0	0.8

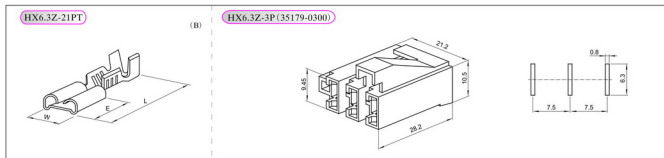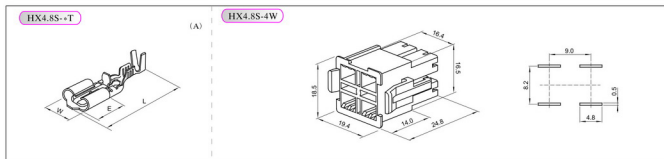

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Hongxing](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)