



技术参数 SPECIFICATIONS

- 适用线规 (Applicable wires) : AWG24#~14#
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 300V.Ac/Dc
- 额定电流 (Current rating) : 15A max
- 接触电阻 (Contact resistance) : $\leq 0.01\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 2000V.Ac/1min
- 材料 (Material) :
 - 壳体 (Housing) : 尼龙 (PA66) UL94V-0
 - 端子 (Terminal) : 黄铜 (Brass Tin/plated)


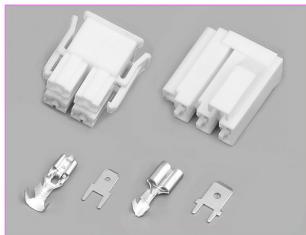


.187"/.250" 端子 TERMINAL

型号 Type	适用线规 Applicable wires	mm ²	AWG#	材料 Material	尺寸 Dimensions (mm)				示例 Sample	数量 Quantity
					W	L	E	材料厚度 Thickness		
HX4.8S-01T	730567-3	0.22~0.5	24~20		5.6	19.3	5.1	0.3	A	10000PCS/包
HX4.8S-21T	730568-3	0.55~1.28	20~16	黄铜 Brass	5.6	19.3	5.1	0.3		8000PCS/包
HX4.8S-41T	730569-3	0.76~2.09	18~14		5.6	19.3	5.1	0.3		6000PCS/包
HX6.3Z-21PT	35725-4210	0.55~1.28	20~16	黄铜 Brass	7.5	18.5	7.7	0.4	B	

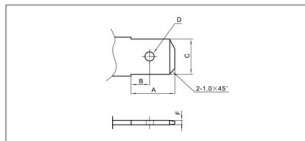

型号 Type	尺寸 Dimensions (mm)				
	A	B	C	D	F
.187"	7.0	3.6	4.8	φ1.5	0.5
.250"	8.3	3.8	6.35	φ2.0	0.8

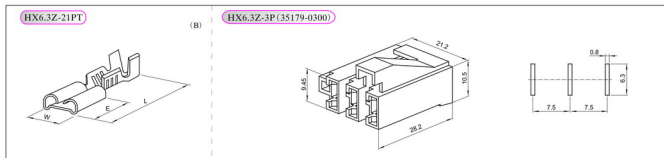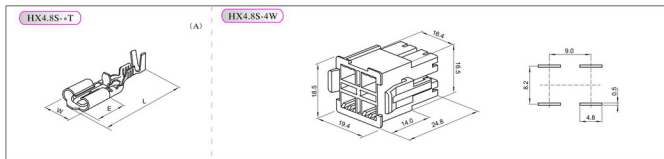

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [Hongxing](#) manufacturer:

Other Similar products are found below :

[00-054007-01074-6](#) [00-054007-70206-1](#) [00-054007-70210-8](#) [00-054007-70217-7](#) [00-054007-70228-3](#) [00-054007-70256-6](#) [00-054007-70316-7](#) [00-054007-49560-4](#) [00-054007-70209-2](#) [00-054007-70231-3](#) [00-054007-70241-2](#) [00-054007-70242-9](#) [00-054007-70246-7](#) [00-054007-70263-4](#) [00-054007-70288-7](#) [00-054007-70290-0](#) [00-054007-70300-6](#) [00-054007-70304-4](#) [00581P0075](#) [600TS-10](#) [604200-1](#) [605601-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [61314-6-C](#) [61810-3](#) [62149-1](#) [626-0194](#) [62-NBM-A](#) [62-SP](#) [63-S](#) [M55155/079C01](#) [M55155/29-5S](#) [M6-14RSX](#) [696683-1](#) [696861-1](#) [696999-1](#) [M86700006](#) [D18-110B-C](#) [D18-110B-M](#) [701-1936](#) [701-2007](#) [701-2069](#) [701-2349](#) [701-2487](#) [70-4800](#) [707-0026](#) [707-0036](#) [707-0070-26](#) [707-0071-26](#)