


技术参数 SPECIFICATIONS

- 线数 (Poles) : 1、2、3、4、6、8、12
- 适用线规 (Applicable wires) : AWG18# ~14#
- 适应基板厚度 (Applicable PC board thickness) : 0.8~2.0mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 300V.Ac/Dc
- 额定电流 (Current rating) : 20A max
- 接触电阻 (Contact resistance) : $\leq 0.01\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 2000V.Ac/1min
- 材料 (Material) :
 - 插头 (Plug housing) : 尼龙 (PA66) UL94V-2(0)
 - 插座 (Receptacle housing) : 尼龙 (PA66) UL94V-2(0)
 - 插片 (Retainer) : 尼龙 (PA66) UL94V-2(0)
 - 针座 (Wafer) : 尼龙 (PA66) UL94V-2(0)
 - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)

端子 TERMINAL(VLP/VLR)

型号 Type	适用线规 Applicable wires		电线外径 O.D of wire ins	材料厚度 Thickness	数量 Quantity
	mm ²	AWG#	mm		
HX62007-PT	0.75~2.0	18~14	2.7~4.0	0.25	2000PCS/盘
HX62008-RT	0.75~2.0	18~14	2.7~4.0	0.25	2000PCS/盘

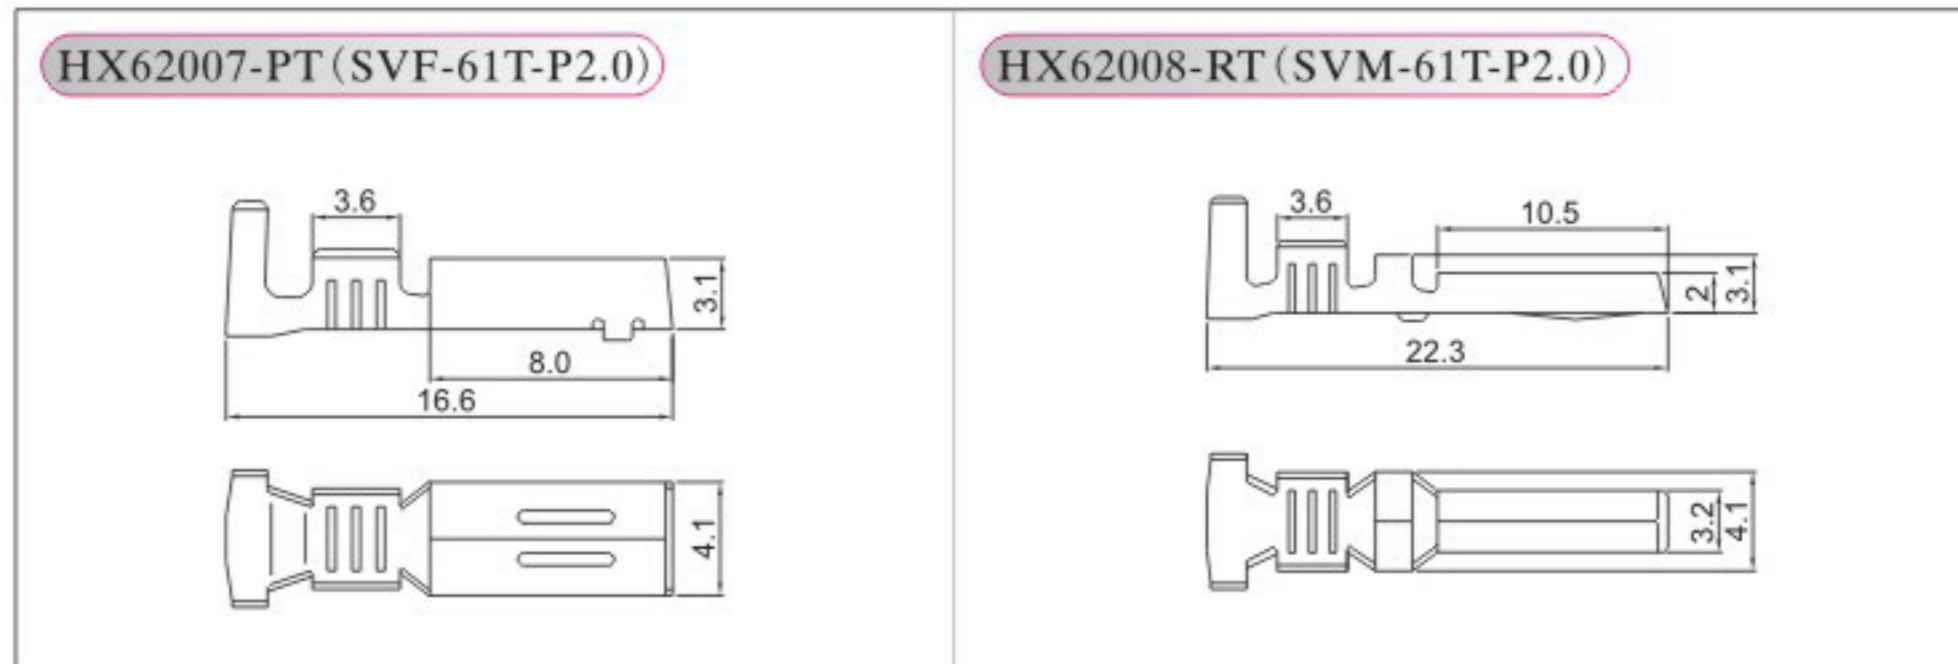



线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座 / 针座 (Housing/Wafer)	插片 (Retainer)
1	300V	20A	<p>HX62007-1P (VLP-01V)</p>	<p>HX62008-1RF (VLR-01VF)</p>	<p>HX62007-1S (VLS-01V)</p>
			<p>HX62008-1A (VLR-1A)</p>	<p>安装尺寸 MOUNTING MEASUREMENT</p>	

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座/针座 (Housing/Wafer)	插片 (Retainer)
2	300V	20A	HX62007-2P (VLP-02V) 	HX62008-2R (VLR-02V) 	HX62003-2S (VLS-02V) <p>蓝色</p>
				HX62008-2RF (VLR-02V) 	HX62003-2HS <p>灰色</p>
				HX62008-2A (VLR-2A) 	安装尺寸 MOUNTING MEASUREMENT
			HX62007-3P (VLP-03V) 	HX62008-3R (VLR-03V) 	HX62003-3S (VLS-03V)
				HX62008-3A (VLR-3A) 	安装尺寸 MOUNTING MEASUREMENT
4 (1X4)	300V	18A	HX62007-4PN (VLP-04VN) 	HX62008-4RN (VLR-04VN) 	HX62003-4S (VL-4S)
				HX62008-4AN (VLR-4AN) 	安装尺寸 MOUNTING MEASUREMENT

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座/针座 (Housing/Wafer)	插片 (Retainer)
4 (2X2)	300V	16A	HX62007-4P (VLP-04V) 	HX62008-4R (VLR-04V) 	HX62003-2S (VLS-02V)
				HX62008-4A (VLR-4A) 	安装尺寸 MOUNTING MEASUREMENT
6	300V	16A	HX62007-6P (VLP-06V) 	HX62008-6R (VLR-06V) 	HX62003-3S (VLS-03V)
				HX62008-6A (VLR-6A) 	安装尺寸 MOUNTING MEASUREMENT
8	300V	15A	HX62007-8P (VLP-08V) 	HX62008-8R (VLR-08V) 	HX62003-4S (VLS-04V)
				HX62008-8A (VLR-8A) 	安装尺寸 MOUNTING MEASUREMENT

线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座/针座(Housing/Wafer)	插片(Retainer)
12	300V	15A	HX62007-12P (VLP-12V) 	HX62008-12R (VLR-12V) 	HX62007-6S (VLS-6V)
			HX62008-12A (VLR-12A) 	安装尺寸 MOUNTING MEASUREMENT 	

■ 安装尺寸 MOUNTING MEASUREMENT

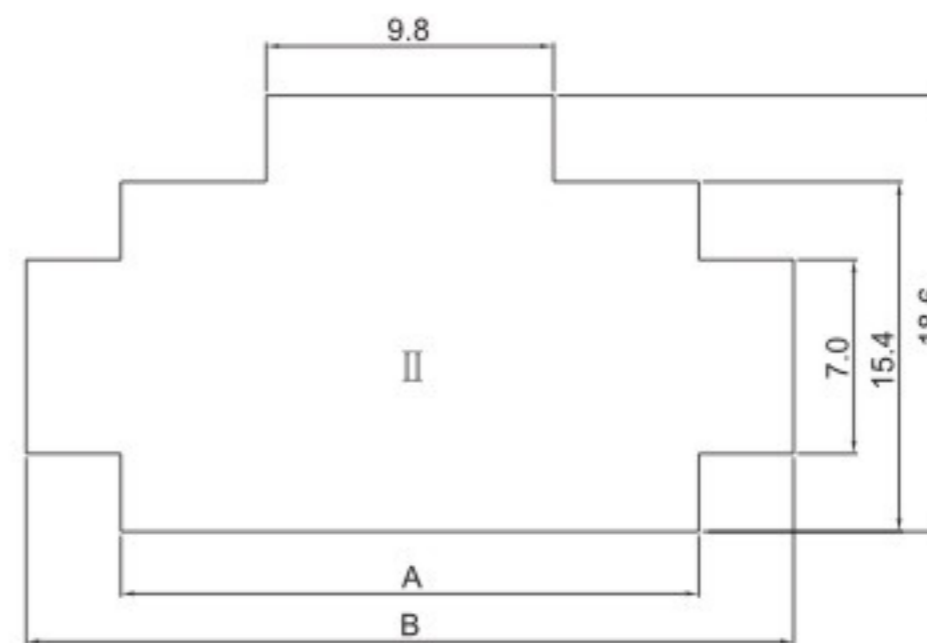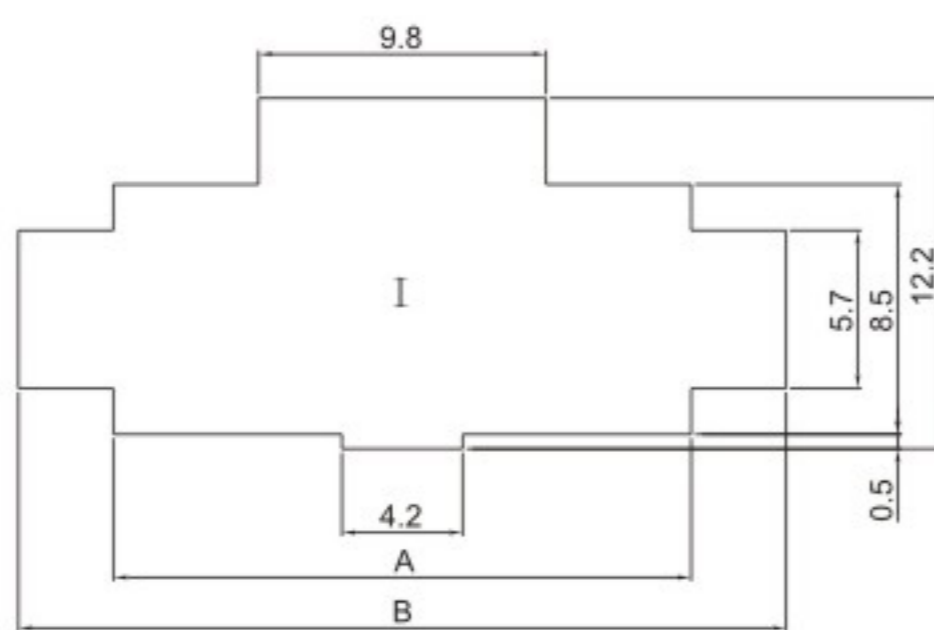

插座 RECEPTACLE HOUSING (HX62008-2~12R)

线数 Poles	型号 Type	尺寸 Dimensions (mm)		示图 Sample
		A	B	
2	HX62008-2R	13.8	20.6	I
3	HX62008-3R	20.0	26.8	I
1×4	HX62008-4RN	26.2	33.0	I
2×2	HX62008-4R	13.8	20.6	II
6	HX62008-6R	20.0	26.8	II
8	HX62008-8R	26.2	33.0	II
12	HX62008-12R	38.9	45.4	II

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Terminals](#) category:

Click to view products by [Hongxing](#) manufacturer:

Other Similar products are found below :

[00-054007-01074-6](#) [00-054007-70206-1](#) [00-054007-70210-8](#) [00-054007-70217-7](#) [00-054007-70228-3](#) [00-054007-70256-6](#) [00-054007-70316-7](#) [00-054007-49560-4](#) [00-054007-70209-2](#) [00-054007-70231-3](#) [00-054007-70241-2](#) [00-054007-70242-9](#) [00-054007-70246-7](#) [00-054007-70263-4](#) [00-054007-70288-7](#) [00-054007-70290-0](#) [00-054007-70300-6](#) [00-054007-70304-4](#) [01-2900-1-04412](#) [00581P0075](#) [600TS-10](#) [604200-1](#) [605601-1](#) [60598-1-CUT-TAPE](#) [60617-1-C](#) [61314-6-C](#) [61810-3](#) [62149-1](#) [626-0194](#) [62-NBM-A](#) [62-SP](#) [63-S](#) [M55155/059I03](#)
[M55155/079C01](#) [M55155/099B03](#) [M55155/099H02](#) [M55155/109H01](#) [M55155/12XH05](#) [M55155/16XH02](#) [M55155/29-5S](#) [M55155/29XJ08](#)
[M55155/30-6S](#) [M55155/30-9S](#) [M55155/30XI09](#) [696683-1](#) [696861-1](#) [696999-1](#) [M86700006](#) [D18-110B-C](#) [D18-110B-M](#)