


技术参数 SPECIFICATIONS

- 适用线规 (Applicable wires) : AWG24#~12#
- 温度范围 (Temperature range) : -20°C~85°C
- 额定电压 (Voltage rating) : 300V.Ac/Dc
- 额定电流 (Current rating) : 18A max
- 接触电阻 (Contact resistance) : $\leq 0.01\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 1500V.Ac/1min
- 材料 (Material) :
 壳体 (Housing) : 尼龙 (PA66) UL94V-2 (0)
 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)
 端子 (Terminal) : 黄铜 (Brass Tin/plated)

端子 TERMINAL

型号 Type	适用线规 Applicable wires		材料 Material	材料厚度 Thickness mm	数量 Quantity
	mm ²	AWG#			
HX630N-21T	ST0-21-250N	0.3~0.75 22~18	黄铜 Brass	0.4	7000PCS/包
HX630N-41T	ST0-61-250N	0.75~2.0 18~14		0.4	6000PCS/包
HX630N-61T	ST0-81-250N	2.0~3.5 14~12		0.4	5000PCS/包

型号 Type	适用线规 Applicable wires		材料 Material	材料厚度 Thickness mm	数量 Quantity
	mm ²	AWG#			
HX63092-PT	0.52~2.1	20~14	黄铜 Brass	0.35	6000PCS/包
HX50008-01PT	0.22~0.5	24~20		0.3	2000PCS/包
HX50008-21PT	0.75~2.0	18~14		0.3	1500PCS/包
HX630S-61TO	SFPS-61T-250	0.75~2.0 18~14		0.43	4000PCS/包

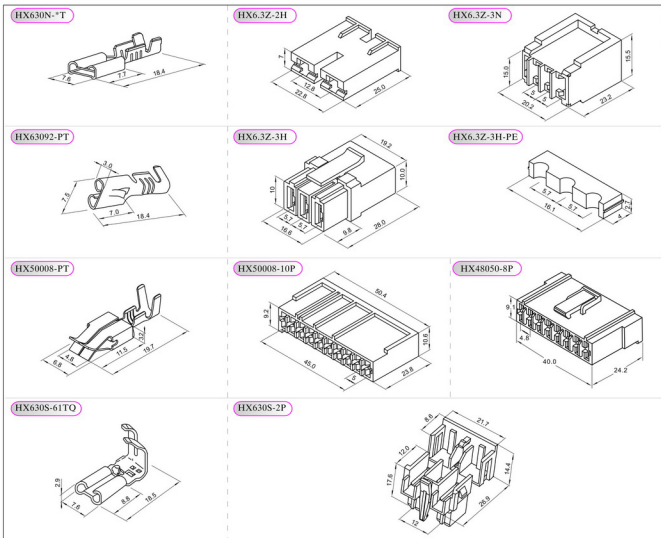

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Hongxing](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)