

RVT-VT Series

WIDE TEMPERATURE 宽温品


- Operating with wide temperature range -40 ~ +105°C  
适用于 -40 ~ +105°C 的宽温范围
- Load life of 1000~2000 hours  
负荷寿命1000~2000小时
- Comply with the RoHS directive  
符合RoHS指令



■ 主要技术性能 Specification

| 项目 Item  | 特性 Performance Characteristics  |  |      |      |      |      |      |       |      |      |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
|--|---|--|------|------|------|------|------|-------|------|------|--------------------|--|---|-----|----|----|----|----|-------|-----|--------|--------------------|--------|------|------|------|------|------|------|------|--------------------|------|-----------|------|------|------|------|------|------|-----------|--------------------|------|---|---|---|---|---|---|---|--------------------|----|----|----|---|---|---|---|---|
| 使用温度范围<br>Operating temperature range                          | -40 ~ +105°C  |  |      |      |      |      |      |       |      |      |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
| 额定电压范围<br>Rated voltage range                                  | 4 ~ 100V  |  |      |      |      |      |      |       |      |      |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
| 标称电容量范围<br>Nominal capacitance range                           | 0.1 ~ 6800μF  |  |      |      |      |      |      |       |      |      |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
| 标称电容量允许偏差<br>Capacitance tolerance                             | ± 20% (120Hz, +20°C)  |  |      |      |      |      |      |       |      |      |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
| 漏电流<br>Leakage current   | $I \leq 0.01CV$ 或 $3(\mu A)$ 2分钟 取较大者<br>( at 20°C, after 2 minutes ) ( whichever is greater )  | $I \leq 0.02CV + 15(\mu A)$ 1分钟 ( 1 minute ) |      |      |      |      |      |       |      |      |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
| 损耗角正切值 ( tg δ )<br>Dissipation factor (+20°C, 120Hz)           | <table border="1"> <thead> <tr> <th colspan="2">U<sub>R</sub> (V)</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td rowspan="2">tg δ</td> <td>∅4~∅10</td> <td>0.35</td> <td>0.26</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.12</td> <td>0.12</td> <td>0.12</td> </tr> <tr> <td>∅12.5~∅16</td> <td>0.42</td> <td>0.38</td> <td>0.34</td> <td>0.30</td> <td>0.26</td> <td>0.22</td> <td>0.18</td> <td>0.14</td> <td>0.12</td> </tr> </tbody> </table>   |  |      |      |      |      |      |       |      |      | U <sub>R</sub> (V) |  | 4 | 6.3 | 10 | 16 | 25 | 35 | 50    | 63  | 100    | tg δ               | ∅4~∅10 | 0.35 | 0.26 | 0.20 | 0.16 | 0.14 | 0.12 | 0.12 | 0.12               | 0.12 | ∅12.5~∅16 | 0.42 | 0.38 | 0.34 | 0.30 | 0.26 | 0.22 | 0.18      | 0.14               | 0.12 |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
| U <sub>R</sub> (V)   |   | 4  | 6.3  | 10   | 16   | 25   | 35   | 50    | 63   | 100  |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
| tg δ   | ∅4~∅10  | 0.35   | 0.26 | 0.20 | 0.16 | 0.14 | 0.12 | 0.12  | 0.12 | 0.12 |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
|  | ∅12.5~∅16   | 0.42   | 0.38 | 0.34 | 0.30 | 0.26 | 0.22 | 0.18  | 0.14 | 0.12 |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
| 温度特性 Temperature characteristics<br>(Impedance ratio at 120Hz) | <table border="1"> <thead> <tr> <th colspan="2"></th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50-63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td rowspan="2">∅4~∅10</td> <td>Z(-25°C) / Z(20°C)</td> <td>7</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> </tr> <tr> <td>Z(-40°C) / Z(20°C)</td> <td>15</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>4</td> </tr> <tr> <td rowspan="2">∅12.5~∅16</td> <td>Z(-25°C) / Z(20°C)</td> <td>7</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C) / Z(20°C)</td> <td>17</td> <td>12</td> <td>10</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table> |  |      |      |      |      |      |       |      |      |                    |  | 4 | 6.3 | 10 | 16 | 25 | 35 | 50-63 | 100 | ∅4~∅10 | Z(-25°C) / Z(20°C) | 7      | 4    | 3    | 2    | 2    | 2    | 2    | 3    | Z(-40°C) / Z(20°C) | 15   | 8         | 6    | 4    | 4    | 3    | 3    | 4    | ∅12.5~∅16 | Z(-25°C) / Z(20°C) | 7    | 5 | 4 | 3 | 2 | 2 | 2 | 2 | Z(-40°C) / Z(20°C) | 17 | 12 | 10 | 8 | 5 | 4 | 3 | 3 |
|  |   | 4  | 6.3  | 10   | 16   | 25   | 35   | 50-63 | 100  |      |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
| ∅4~∅10   | Z(-25°C) / Z(20°C)  | 7  | 4    | 3    | 2    | 2    | 2    | 2     | 3    |      |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
|  | Z(-40°C) / Z(20°C)  | 15   | 8    | 6    | 4    | 4    | 3    | 3     | 4    |      |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
| ∅12.5~∅16  | Z(-25°C) / Z(20°C)  | 7  | 5    | 4    | 3    | 2    | 2    | 2     | 2    |      |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
|  | Z(-40°C) / Z(20°C)  | 17   | 12   | 10   | 8    | 5    | 4    | 3     | 3    |      |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
| 耐久性<br>Load life   | After 2000 hrs. (1000 hrs. for ∅4~∅6.3x5.4) application of the rated voltage at 105°C, they meet the characteristics listed below. 在105°C环境中施加额定工作电压2000小时 (∅4~∅6.3x5.4 为1000小时)后, 电容器的特性符合下表的要求。<br>电容量变化率 Capacitance change : ±20%初始测量值以内 ±20% of the initial measured value<br>漏电流 Leakage current : ≤初始规定值 ≤the initial specified value<br>损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2times of the initial specified value   |  |      |      |      |      |      |       |      |      |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |
| 高温贮存<br>Shelf life   | +105°C, 1000小时贮存后, 恢复16小时后:<br>After storage for 1000 hours at +105°C and then resumed for 16 hours:<br>电容量变化率 Capacitance change : ±10%初始测量值以内 10% of the initial measured value<br>漏电流 Leakage current : ≤ 2倍初始规定值 ≤2times of the initial specified value<br>损耗角正切值 Dissipation factor : ≤ 2倍初始规定值 ≤2times of the initial specified value   |  |      |      |      |      |      |       |      |      |                    |  |   |     |    |    |    |    |       |     |        |                    |        |      |      |      |      |      |      |      |                    |      |           |      |      |      |      |      |      |           |                    |      |   |   |   |   |   |   |   |                    |    |    |    |   |   |   |   |   |

■ 外形图及尺寸图 Case size table

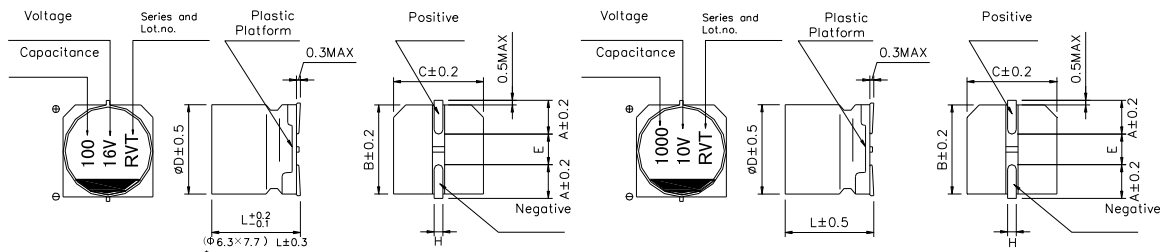

\*1. Voltage mark for 6.3V is [6V]      6.3V的产品标识为 [6V]  
 \*2. Applicable to ∅6.3x7.7      适用于∅6.3x7.7  
 \*3. Applicable to ∅8x10.5~∅10      适用于∅8x10.5~∅10  
 \*4. Applicable to ∅12.5~∅16      适用于∅12.5~∅16

V-CHIP ALUMINUM ELECTROLYTIC CAPACITORS 贴片式铝电解电容器

RVT-VT Series

| ∅D x L  | 4 x 5.4 | 5 x 5.4 | 6.3 x 5.4 | 6.3 x 7.7 | 8 x 6.2 | 8 x 10.5 | 10 x 10.5 | 10 x 13.5 | 12.5 x 13.5 | 12.5 x 16 | 16 x 16.5 |
|---------|---------|---------|-----------|-----------|---------|----------|-----------|-----------|-------------|-----------|-----------|
| A       | 1.8     | 2.1     | 2.4       | 2.4       | 3.3     | 2.9      | 3.2       | 3.2       | 4.7         | 4.7       | 5.5       |
| B       | 4.3     | 5.3     | 6.6       | 6.6       | 8.3     | 8.3      | 10.3      | 10.3      | 13.0        | 13.0      | 17.0      |
| C       | 4.3     | 5.3     | 6.6       | 6.6       | 8.3     | 8.3      | 10.3      | 10.3      | 13.0        | 13.0      | 17.0      |
| E ± 0.2 | 1.0     | 1.3     | 2.2       | 2.2       | 2.2     | 3.1      | 4.4       | 4.4       | 4.4         | 4.4       | 6.7       |
| L       | 5.4     | 5.4     | 5.4       | 7.7       | 6.2     | 10.5     | 10.5      | 13.5      | 13.5        | 16.0      | 16.5      |

■ 尺寸 Dimensions

| μF   | WV<br>Code<br>代码 | 4                        |              | 6.3                        |              | 10                      |              | 16  |                       | 25                      |                        |
|------|------------------|--------------------------|--------------|----------------------------|--------------|-------------------------|--------------|---|-----------------------|-------------------------|------------------------|
|      |                  | 0G                       |              | 0J                         |              | 1A                      |              | 1C  |                       | 1E                      |                        |
| 4.7  | 4R7              |                          |              |                            |              |                         |              |   |                       | 4 x 5.4                 | 13                     |
| 10   | 100              |                          |              |                            |              |                         |              | 4 x 5.4                                   | 18                    | 5 x 5.4<br>(4 x 5.4)    | 20<br>(14)             |
| 22   | 220              |                          |              | 4 x 5.4                    | 22           | 5 x 5.4<br>(4 x 5.4)    | 25<br>(20)   | 5 x 5.4<br>(4 x 5.4)                      | 27<br>(20)            | 6.3 x 5.4<br>(5 x 5.4)  | 36<br>(25)             |
| 33   | 330              | 5 x 5.4<br>(4 x 5.4)     | 30<br>(18)   | 5 x 5.4<br>(4 x 5.4)       | 27<br>(22)   | 5 x 5.4<br>(4 x 5.4)    | 30<br>(22)   | 6.3 x 5.4<br>(5 x 5.4)                    | 40<br>(28)            | 6.3 x 5.4<br>(5 x 5.4)  | 44<br>(29)             |
| 47   | 470              | 5 x 5.4<br>(4 x 5.4)     | 36<br>(24)   | 5 x 5.4<br>(4 x 5.4)       | 33<br>(25)   | 6.3 x 5.4<br>(5 x 5.4)  | 41<br>(30)   | 6.3 x 5.4<br>(5 x 5.4)                    | 48<br>(31)            | 6.3 x 5.4<br>(8 x 6.2)  | 48<br>(91)             |
| 100  | 101              | 6.3 x 5.4<br>(5 x 5.4)   | 60<br>(43)   | 6.3 x 5.4<br>(5 x 5.4)     | 50<br>(39)   | 6.3 x 5.4<br>(8 x 6.2)  | 53<br>(110)  | 6.3 x 5.4<br>(8 x 6.2)                    | 60<br>(120)           | 6.3 x 7.7               | 91                     |
| 150  | 151              | 6.3 x 5.4                | 52           | 6.3 x 5.4                  | 55           | 6.3 x 5.4               | 62           | 6.3 x 7.7                                 | 95                    | 8 x 10.5<br>(6.3 x 7.7) | 140<br>(100)           |
| 220  | 221              | 6.3 x 5.4                | 57           | 6.3 x 7.7<br>(6.3 x 5.4)   | 105<br>(67)  | 6.3 x 7.7<br>(8 x 6.2)  | 105<br>(105) | 8 x 10.5<br>(6.3 x 7.7)<br>(8 x 6.2)      | 150<br>(105)<br>(85)  | 8 x 10.5                | 175                    |
| 330  | 331              | 6.3 x 7.7                | 100          | 6.3 x 7.7                  | 105          | 8 x 10.5                | 196          | 8 x 10.5                                  | 195                   | 10 x 10.5<br>(8 x 10.5) | 240<br>(220)           |
| 470  | 471              | 6.3 x 7.7                | 105          | 8 x 10.5<br>(6.3 x 7.7)    | 210<br>(120) | 10 x 10.5<br>(8 x 10.5) | 260<br>(210) | 10 x 10.5<br>(8 x 10.5)                   | 295<br>(230)          | 10 x 10.5               | 280                    |
| 680  | 681              | 8 x 10.5                 | 210          | 8 x 10.5                   | 210          | 10 x 10.5               | 270          | 10 x 10.5                                 | 315                   | 10 x 13.5               | 400                    |
| 1000 | 102              | 8 x 10.5                 | 230          | 10 x 10.5<br>(8 x 10.5)    | 300<br>(230) | 10 x 10.5               | 315          | 12.5 x 13.5<br>(10 x 13.5)<br>(10 x 10.5) | 500<br>(390)<br>(340) | 12.5 x 13.5             | 580                    |
| 1500 | 152              | 10 x 10.5                | 315          | 10 x 13.5<br>(10 x 10.5)   | 450<br>(315) | 10 x 13.5               | 460          | 12.5 x 13.5                               | 550                   | 12.5 x 16               | 850                    |
| 2200 | 222              | 10 x 13.5<br>(10 x 10.5) | 440<br>(340) | 12.5 x 13.5<br>(10 x 13.5) | 620<br>(500) | 12.5 x 13.5             | 680          | 16 x 16.5<br>(12.5 x 16)                  | 950<br>(750)          | 16 x 16.5               | 1050                   |
| 3300 | 332              | 10 x 13.5                | 490          | 12.5 x 16<br>(12.5 x 13.5) | 700<br>(660) | 16 x 16.5               | 1000         | 16 x 16.5                                 | 1000                  |                         |                        |
| 4700 | 472              | 12.5 x 13.5              | 600          | 16 x 16.5                  | 1000         |                         |              |   |                       |                         |                        |
| 6800 | 682              | 16 x 16.5<br>(12.5 x 16) | 950<br>(650) |                            |              |                         |              |   |                       | Case size<br>尺寸         | Ripple current<br>纹波电流 |

| μF   | WV<br>Code<br>代码 | 35                       |            | 50                                    |                    | 63                                    |                        | 100                                       |                       |
|------|------------------|--------------------------|------------|---------------------------------------|--------------------|---------------------------------------|------------------------|---|-----------------------|
|      |                  | 1V                       |            | 1H                                    |                    | 1J                                    |                        | 2A  |                       |
| 0.1  | 0R1              |                          |            | 4 x 5.4                               | 0.7                | 4 x 5.4                               | 0.7                    |   |                       |
| 0.22 | R22              |                          |            | 4 x 5.4                               | 1.6                | 4 x 5.4                               | 1.6                    |   |                       |
| 0.33 | R33              |                          |            | 4 x 5.4                               | 2.5                | 4 x 5.4                               | 2.5                    |   |                       |
| 0.47 | R47              |                          |            | 4 x 5.4                               | 3.5                | 4 x 5.4                               | 3.5                    |   |                       |
| 1    | 010              |                          |            | 4 x 5.4                               | 7                  | 4 x 5.4                               | 7                      | 4 x 5.4                                   | 7                     |
| 2.2  | 2R2              |                          |            | 4 x 5.4                               | 11                 | 4 x 5.4                               | 11                     | 6.3 x 5.4                                 | 14                    |
| 3.3  | 3R3              | 4 x 5.4                  | 13         | 4 x 5.4                               | 13                 | 5 x 5.4                               | 13                     | 6.3 x 7.7<br>(6.3 x 5.4)<br>(8 x 6.2)     | 32<br>(20)<br>(30)    |
| 4.7  | 4R7              | 4 x 5.4                  | 14         | 5 x 5.4<br>(4 x 5.4)                  | 16<br>(13)         | 5 x 5.4                               | 16                     | 6.3 x 7.7<br>(6.3 x 5.4)                  | 35<br>(21)            |
| 10   | 100              | 5 x 5.4<br>(4 x 5.4)     | 21<br>(14) | 6.3 x 5.4                             | 24                 | 6.3 x 7.7<br>(6.3 x 5.4)<br>(8 x 6.2) | 39<br>(24)<br>(25)     | 8 x 10.5<br>(6.3 x 7.7)                   | 77<br>(35)            |
| 22   | 220              | 6.3 x 5.4                | 38         | 6.3 x 7.7<br>(6.3 x 5.4)<br>(8 x 6.2) | 51<br>(42)<br>(70) | 8 x 10.5<br>(6.3 x 7.7)               | 98<br>(49)             | 10 x 10.5<br>(8 x 10.5)                   | 126<br>(84)           |
| 33   | 330              | 6.3 x 5.4<br>(8 x 6.2)   | 42<br>(84) | 6.3 x 7.7                             | 60                 | 8 x 10.5                              | 112                    | 10 x 10.5                                 | 133                   |
| 47   | 470              | 6.3 x 7.7<br>(6.3 x 5.4) | 70<br>(50) | 8 x 10.5<br>(6.3 x 7.7)               | 120<br>(63)        | 10 x 10.5<br>(8 x 10.5)               | 160<br>(119)           | 12.5 x 13.5<br>(10 x 13.5)<br>(10 x 10.5) | 250<br>(160)<br>(140) |
| 68   | 680              |                          |            |                                       |                    | Case size<br>尺寸                       | Ripple current<br>纹波电流 | 12.5 x 13.5<br>(10 x 13.5)                | 300<br>(180)          |

•Case size ∅D×L(mm), ripple current (mA rms) at 105°C 120Hz •尺寸∅D×L(mm), 纹波电流(mA rms)於 105°C 120Hz

V-CHIP

RVT-VT Series

■ 尺寸 Dimensions

| μF   | WV<br>Code<br>代码 | 35  |                       | 50  |                       | 63  |                       | 100                        |                        |
|------|------------------|---|-----------------------|---|-----------------------|---|-----------------------|----------------------------|------------------------|
|      |                  | 1V  |                       | 1H  |                       | 1J  |                       | 2A                         |                        |
| 100  | 101              | 8 × 10.5<br>(6.3 × 7.7)                   | 120<br>(84)           | 10 × 10.5<br>(8 × 10.5)                   | 170<br>(140)          | 12.5 × 13.5<br>(10 × 13.5)<br>(10 × 10.5) | 270<br>(210)<br>(196) | 16 × 16.5<br>(12.5 × 13.5) | 450<br>(380)           |
| 150  | 151              | 8 × 10.5                                  | 155                   | 10 × 10.5                                 | 170                   | 10 × 13.5                                 | 225                   |                            |                        |
| 220  | 221              | 10 × 10.5<br>(8 × 10.5)                   | 220<br>(190)          | 10 × 13.5<br>(10 × 10.5)                  | 280<br>(220)          | 16 × 16.5<br>(12.5 × 13.5)<br>(10 × 13.5) | 560<br>(470)<br>(235) | 16 × 16.5                  | 550                    |
| 330  | 331              | 10 × 10.5                                 | 245                   | 16 × 16.5<br>(12.5 × 13.5)<br>(10 × 13.5) | 600<br>(420)<br>(295) | 16 × 16.5<br>(12.5 × 16)                  | 700<br>(510)          |                            |                        |
| 470  | 471              | 12.5 × 13.5<br>(10 × 13.5)<br>(10 × 10.5) | 520<br>(375)<br>(280) | 16 × 16.5<br>(12.5 × 16)                  | 700<br>(520)          | 16 × 16.5                                 | 750                   |                            |                        |
| 680  | 681              | 12.5 × 13.5<br>(10 × 13.5)                | 530<br>(395)          | 16 × 16.5                                 | 750                   |   |                       | Case size<br>尺寸            | Ripple current<br>纹波电流 |
| 1000 | 102              | 16 × 16.5<br>(12.5 × 16)                  | 750<br>(600)          |   |                       |   |                       |                            |                        |

•Case size  $\varnothing D \times L$ (mm), ripple current (mA rms) at 105°C 120Hz •尺寸 $\varnothing D \times L$ (mm) 纹波电流 (mA rms)於 105°C 120Hz

■ 纹波电流的相关参数 Multiplier For Ripple Current

| Frequency 频率      |           | 50Hz        | 120Hz | 300Hz | 1KHz | 10KHz- |      |
|-------------------|-----------|-------------|-------|-------|------|--------|------|
| Coefficient<br>系数 | Φ4-Φ10    | 0.1-68uF    | 0.70  | 1.00  | 1.17 | 1.36   | 1.50 |
|                   |           | 100-300uF   | 0.85  | 1.00  | 1.08 | 1.20   | 1.30 |
|                   | Φ12.5-Φ16 | -68uF       | 0.75  | 1.00  | 1.35 | 1.57   | 2.00 |
|                   |           | 100-680uF   | 0.80  | 1.00  | 1.23 | 1.34   | 1.50 |
|                   |           | 1000-6800uF | 0.85  | 1.00  | 1.10 | 1.13   | 1.15 |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Aluminium Electrolytic Capacitors - SMD category](#):*

*Click to view products by [Honor manufacturer](#):*

Other Similar products are found below :

[EEV-FK1E332W](#) [ULV2H1R8MNL1GS](#) [MAL214099813E3](#) [CA025M4R70REB-0405](#) [HUB1800-S](#) [34610](#) [RYK-50V101MG5TT-FL](#)  
[107AXZ016MQ5](#) [RVJ-50V101MH10U-R](#) [EMVH101GRA221MMN0S](#) [MAL214097402E3](#) [MAL215375471E3](#) [MAL224699909E3](#)  
[MAL224699813E3](#) [MAL215099014E3](#) [MAL215099017E3](#) [MAL215099117E3](#) [MAL215099818E3](#) [AEH1010331M025R](#)  
[AEA1010221M035R](#) [AEA1010470M080R](#) [AEH1010221M025R](#) [AEA1010102M016R](#) [AEA0810331M025R](#) [AEA1213102M025R](#)  
[AEA1213331M050R](#) [AEH1012471M016R](#) [MAL213967339E3](#) [ZSC00AF2211EARL](#) [VB1E100MB054000CE0](#) [RVT0J471M0607](#)  
[RVT1000UF10V34RV0081](#) [XT100UF50V90RV0067](#) [RVE100UF16V67RV0046](#) [RST22UF35V025](#) [RVT100UF16V67RV0120](#)  
[XT47UF50V90RV0082](#) [XT22UF50V90RV0083](#) [RST22UF50V026](#) [RST10UF16V013](#) [RST100UF25V004](#) [RST100UF35V009](#)  
[RST47UF25V035](#) [RST47UF50V038](#) [RST220UF25V019](#) [RSL220UF25V021](#) [XT10UF25V90RV0068](#) [FZ100UF50V90RV0066](#)  
[RST100UF16V003](#) [XT100UF10V90RV0060](#)