



Recommended PCB Layout (Tolerance ±0.05)
(Copper-sided View)

PIN	Ø2.0	Ø2.35	Ø2.5

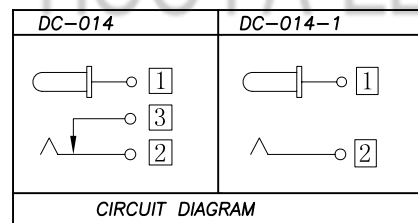

DC MATE PLUG

					TOLERANCE UNLESS SPECIFIED								
					UP TO 5mm: ±0.1	ANGULAR	1						
					ABOVE 5mm: ±0.2	±1°	NO	DATE	REVISIONS		BY	APPD	
6	SHUNT TERMINAL	2	BRASS	1	Sn-PLATED	TITLE: DC JACK		UNIT : MM	ROHS COMPLIANT	DWN			
5	TIP SPRING	1	SUS	1	Sn-PLATED	MODEL: DC-014 2.0		SCALE: 1:1	CHK'D				
4	CENTER PIN CONTACT	3	BRASS	1	Sn-PLATED				APPD				
3	CENTER PIN		BRASS	1	Sn-PLATED								
2	COVER		PCB	1									
1	HOUSING		PBT	1									
NO.	PART NAME		MATERIAL	QTY	FINISHING	HAOYU(HONGKONG)LIMITED 皓宇(香港)有限公司				PRO.AGL:		REV :A0	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DC Power Connectors](#) category:

Click to view products by [HOOYA](#) manufacturer:

Other Similar products are found below :

[B04P-VL-VN-1.8](#) [1600206-1](#) [163-0308-EX](#) [163-4012-EX](#) [163-4117-EX](#) [163-7421](#) [163-MJ22-EX](#) [171-0721-EX](#) [KLDX-SMT-0202-BPTR](#)
[163-0179-EX](#) [163-1000-EX](#) [163-4007-EX](#) [163-4015-EX](#) [171-0722-E](#) [171-7391](#) [K596](#) [KLD-0201-BC](#) [KPPX-D](#) [4C6831AX](#) [TS3PNJ](#)
[E16550-0008](#) [VLP-08V-1](#) [DC PLUG-P1M-P1MR](#) [XT90IPW22-M](#) [09758](#) [09441](#) [AS120-F](#) [09442](#) [AS120-M](#) [09759](#) [09760](#) [CP30240](#)
[TAMIYA-M](#) [TAMIYA-MT1](#) [TAMIYA-MT2](#) [4840.1200](#) [4840.2202](#) [C5080HI-04P-18 + C5080HI-C](#) [JC-138](#) [JC-210](#) [JPO-25 \(FC6814\)](#) [JYO-](#)
[26 \(FC6811\)](#) [JYO-29 \(FC68102\)](#) [KLB 3](#) [KLBM 3](#) [KLBPS 3](#) [KLS 10 SCHWARZ](#) [KLS 40 SCHWARZ](#) [KPJXHT-4S](#) [DC-10A FC68148](#) [DC-](#)
[10B \(FC68149\)](#) [WKLS 2](#)