
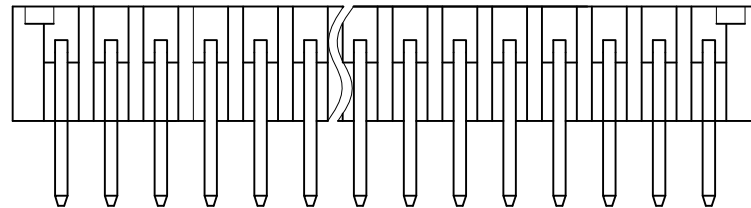



P. C. B LAYOUT

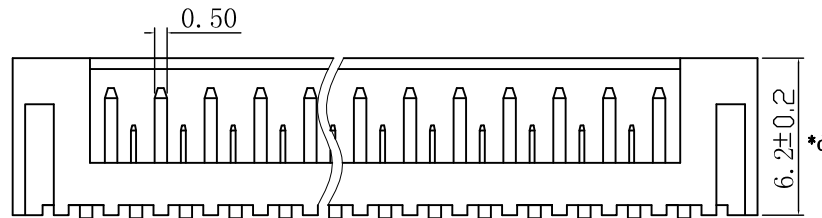

SPECIFICATION

1. Rating : AC/DC 250V 2A.
2. Contact resistance: ≤50mΩ.
3. Insulation resistance: ≥1000MΩ (DC500V).
4. Withstanding voltage: 800VAC .
5. PINRETENTIVE FORCE 针固定力: ≥10N
6. life test: 50 cycles.
7. Operation temperature range:-25℃~85℃.
8. Sign"* "is importance dimension.

$A = (\text{PIN}-1) \times 2.0$

$B = (\text{PIN}-1) \times 2.0 + 4.0$

				TOLERANCE UNLESS SPECIFIED								
				<1.5: ±0.1mm	ANGLES ±1.5°							
				>1.5~5.0: ±0.25mm			NO	DATE	REVISIONS		BY	APPD
				>5.0: ±0.3mm								
				TITLE: CONNECTOR				UNIT : MM	ROHS COMPLIANT	DWN		
				PART NO.: PH2001-04R				SCALE: 2:1	CHK'D			
2	CONTACT FOOT	BRASS	4	AG-PLATING	DONGGUANG HAOYU ELECTRONICS CO., LTD 东莞市弘皓电子有限公司				APPD			
1	HOUSE	PA66	1	WHITE					PRO.AGL:		REV :AO	
NO.	PART NAME	MATERIAL	QTY	FINISHING								

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HOOYA](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)