




P.C.B LAYOUT

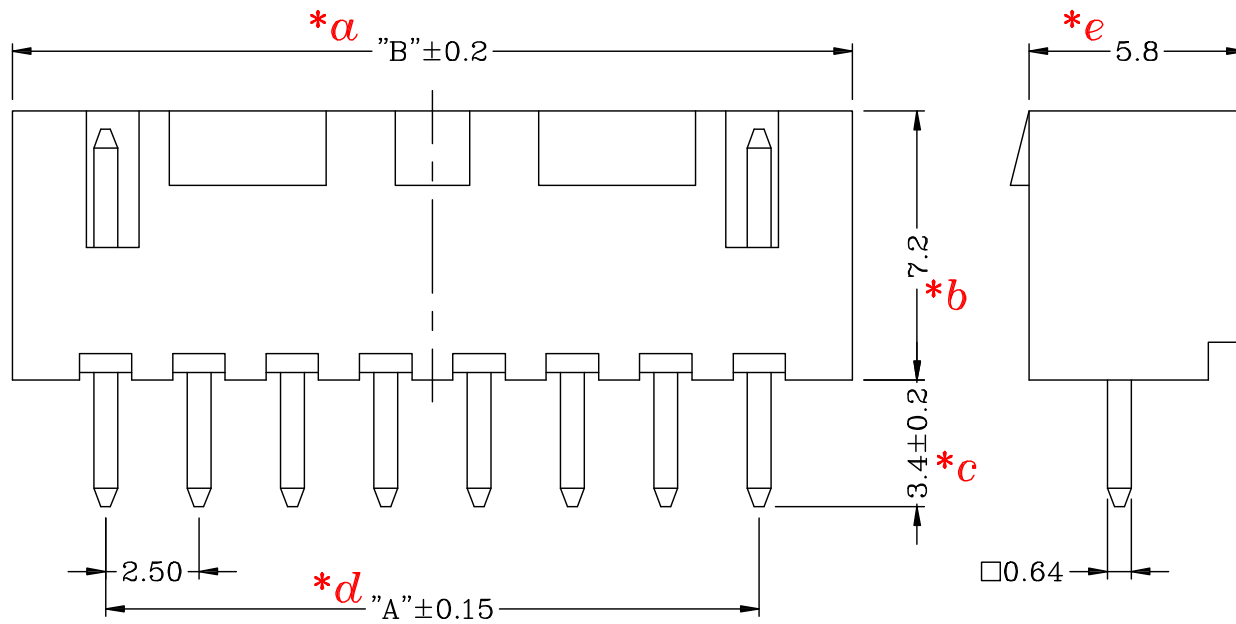

SPECIFICATION

1. Rating : DC 250V 3A.
2. Contact resistance: $\leq 50m\Omega$.
3. Insulation resistance: $\geq 1000M\Omega$ (DC100V).
4. Withstanding voltage: 1000VAC .
5. PINRETENTIVE FORCE 针固定力: $\geq 15N$
6. Life test: 50 cycles.
7. Operation temperature range: $-25^{\circ}C \sim 85^{\circ}C$.
8. Sign "*" is importance dimension.

$A = (PIN-1) \times 2.5$
 $B = (PIN-1) \times 2.5 + 5.0$

					TOLERANCE UNLESS SPECIFIED							
					<1.5: $\pm 0.1mm$	ANGLES $\pm 1.5^{\circ}$	1	2021.8..31	增加材质颜色		WM	
					>1.5~5.0: $\pm 0.25mm$		NO	DATE	REVISIONS		BY	APPD
					>5.0: $\pm 0.3mm$	TITLE: XH 2.5mm connector		UNIT : MM	ROHS COMPLIANT	DWN		
					PART NO.: XHS2500-06		SCALE: 2:1		CHK'D			
2	CONTACT FOOT	BRASS	XX	SN-PLATED					APPD			
1	HOUSING	PA66	1	WHITE/BLACK/RED								
NO.	PART NAME	MATERIAL	QTY	FINISHING	 DONGGUANG HAOYU ELECTRONICS CO., LTD 皓宇 东莞市弘皓电子有限公司		PRO.AGL: 		REV :A1			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [HOOYA](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [65495-038](#) [65692-001LF](#) [65781-018](#)
[65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-](#)
[4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[820-22-008-30-001101](#) [821-22-002-10-001101](#)