



HOSONIC ELECTRONIC CO., LTD.
CRYSTAL UNIT SPECIFICATIONS



Issue	November 12, 2010
Rev.	1.0
Page	9

Customer	
Customer P/N	
Product	3225 Crystal
Nominal Frequency	27.000MHz
HOSONIC P/N	E3SB27E00000DE

Drawn	Checked	Approved



ELECTRICAL PARAMETERS


No.	Item	Symb.	Electrical Specification				Remark
			Min.	Type	Max.	Units	
1	Nominal Frequency	F0	27.000			MHz	
2	Mode of Vibration		<input checked="" type="checkbox"/> Fundamental		<input type="checkbox"/> 3 rd Overtone		
3	Frequency Tolerance	$\Delta F/F0$	-10	-	10	ppm	at 25°C±3°C
4	Operating Temperature Range	TOPR	-20	-	70	°C	
5	Frequency Stability	TC	-10	-	10	ppm	
6	Storage Temperature	TSTG	-40	-	85	°C	
7	Load capacitance	CL	-	10	-	pF	
8	Equivalent Series Resistance	ESR	-	-	50	Ω	
9	Drive Level	DL	-	50	100	μW	
10	Insulation Resistance	IR	500	-	-	M Ω	At 100V _{DC}
11	Shunt Capacitance	C0	-	-	3	pF	
12	Aging Per Year	Fa	-2	-	2	ppm	First Year
13	Package type	HCX-3SB					




HOSONIC ELECTRONIC CO., LTD.
CRYSTAL UNIT SPECIFICATIONS



● OUTLINE DIMENSIONS (UNIT: MM)

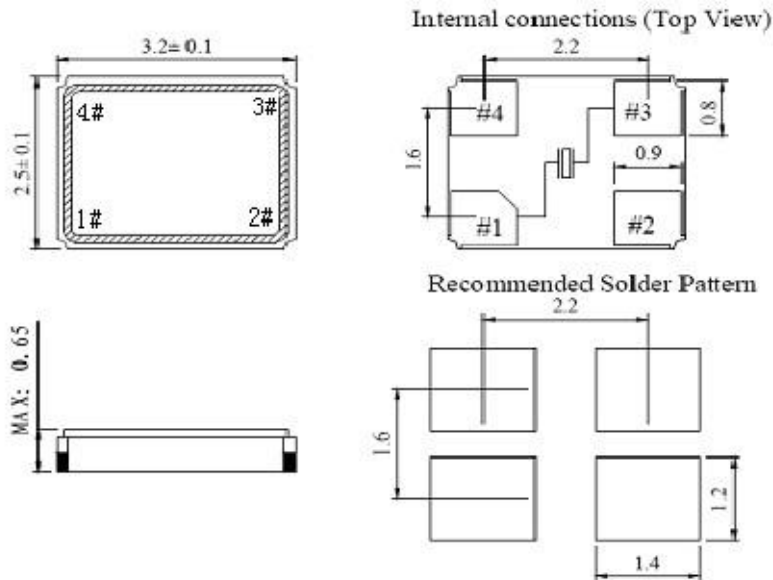

● MARKING

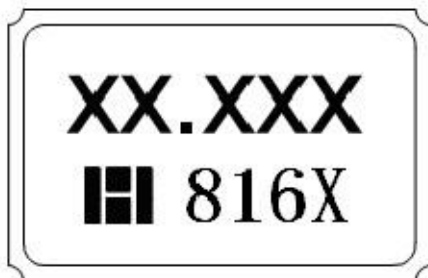

First Line: Frequency in MHz (6 digitals include dot)
Second Line: H---HOSONIC LOGO Date code
8---Year 2008
16---Week code
X--- Internal control code




FOR EXAMPLE:
26.000
H 816M



HOSONIC ELECTRONIC CO., LTD.
CRYSTAL UNIT SPECIFICATIONS



● PRODUCT LAYOUT



NO.	Part	Material	Remark
1	LID	KOVAR(Fe+Co+Ni alloy)	
2	PKG	Al ₂ O ₃	Base
3	BLANK	SiO ₂	Quartz
4	ADHESIVE	Ag/SILICON	Support
5	Electrode	Noble metal	




HOSONIC ELECTRONIC CO., LTD.
CRYSTAL UNIT SPECIFICATIONS



● REFLOW PROFILES

Profiles Feature	Pb-Free Assembly
Average Ramp-up Rate (Ts max to Tp)	3°C/second max.
Preheat	
■ Temperature Min (Ts min)	125°C
■ Temperature Max (Ts max)	200°C
■ Time (ts min to ts max)	60~180 seconds
Time maintained above	
■ Temperature (TL)	217°C
■ Time (tL)	60~150 seconds
Peak/Classification Temperature (Tp)	260°C
Time within 5°C of actual Peak	
Temperature (tp)	
Ramp-down rate	
Time 25°C to Peak Temperature	20~40 seconds
Suggest reflow times	6°C/second max.
	8 minutes max.
	3 Times max

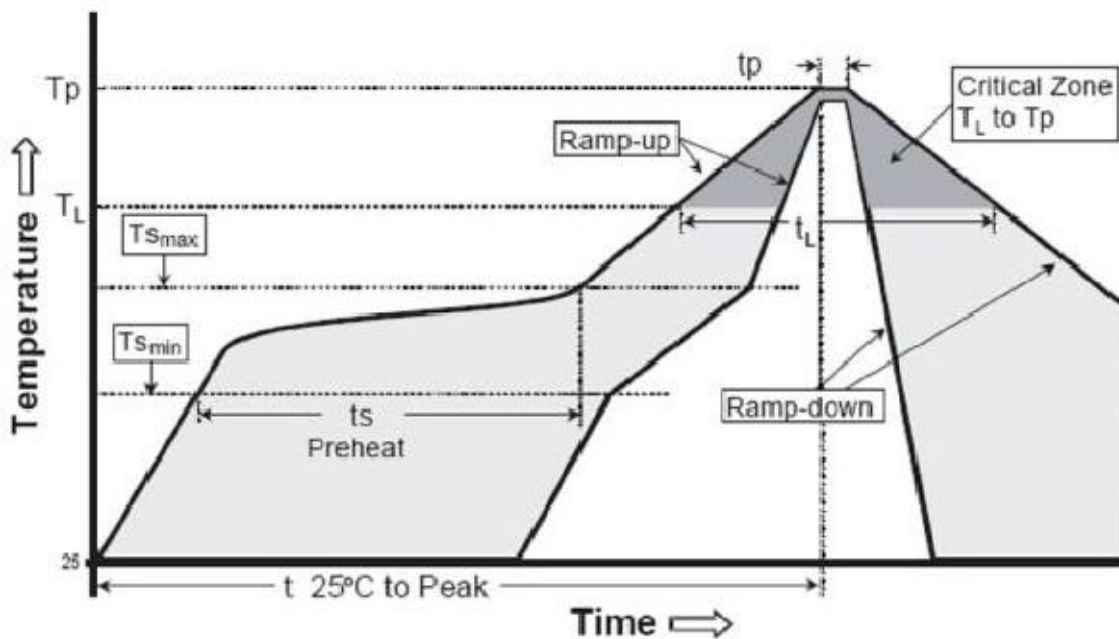

Remark: To reference JEDEC J-STD-020C




HOSONIC ELECTRONIC CO., LTD.
CRYSTAL UNIT SPECIFICATIONS




● PACKAGE

Tape Dimensions(unit : mm)

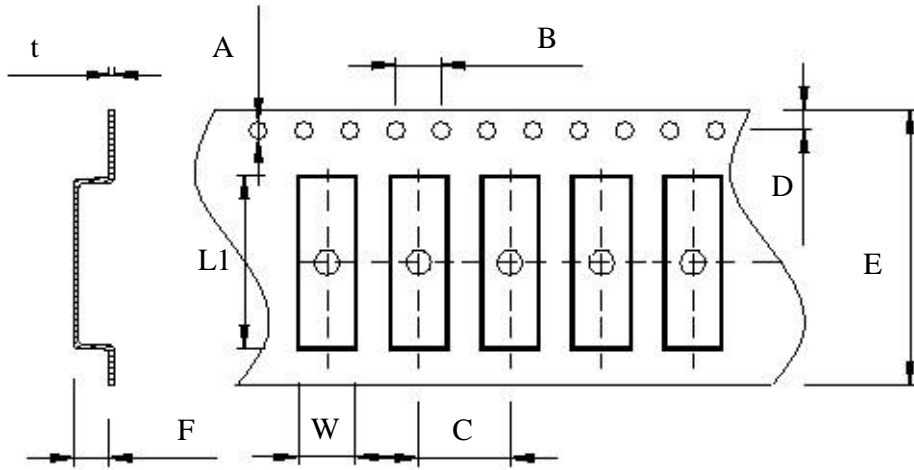

A	B	C	D	E	F	L1	W	t
1.50	4.0	4.0	1.75	8.0	1.0	3.6	2.9	0.3

Reel Dimensions(unit: mm)

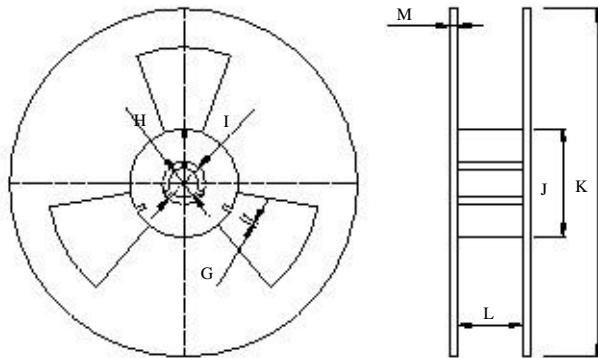

G	H	I	J	K	L	M
2.5	13.5	21.6	60.0	180	9.5	1.6



*3000pcs/Reel





HOSONIC ELECTRONIC CO., LTD.
CRYSTAL UNIT SPECIFICATIONS



Carton Dimension (unit : mm)

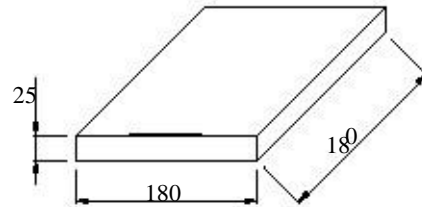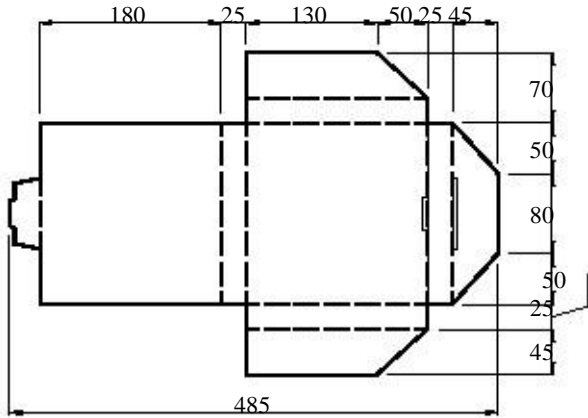

1 reel = 1 Inner box

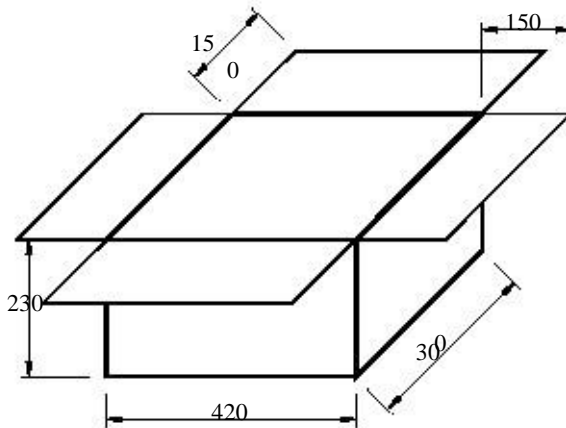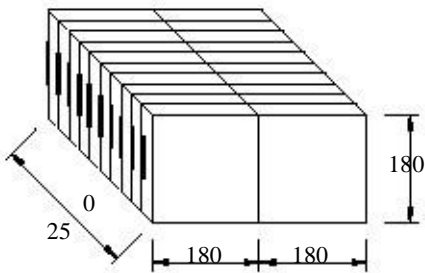

20 Inner boxes = 1 Carton

60kpcs = 1 Carton



HOSONIC ELECTRONIC CO., LTD.
CRYSTAL UNIT SPECIFICATIONS



● RELIABILITY SPECIFICATIONS

No.	Test Item	Test Conditions	Reference
1	High Temperature Storage	Temperature: 125°C±5°C Time:1000±24 Hours	MIL-STD-883E-1016
2	Temperature Cycle	Temperature 1: -55°C±5°C Temperature 2: 125°C±5°C Temperature change between T1 and T2 at soonest Run 10 cycles, maintain T1 and T2 15minutes each in one cycle	MIL-STD-883E-1011.9B
3	Solder Heat Resistance	Pre-heat: 125°C 60~120 Seconds Solder Temperature: 260°C±5°C Time:30 Seconds	MIL-STD-202F 210 E
4	Drop Test	6 Times Free Fall from 150cm height table to cement block	MIL-STD-202F-203B
5	High Temperature, High Humidity Storage	Temperature: 85°C±5°C Relative Humidity: 80%~85% Time: 250Hours±24 Hours	MIL-STD-202 F-103B
6	Steam Aging	Temperature: 97°C±5°C Time:8 Hours 260°C solder pot to check solderability	MIL-STD-883 C-1008.2B
7	Solderability	Dip in flux 5~10 seconds Temperature: 260°C±5°C Time:10 Seconds	MIL-STD-883E 2003
8	Aging	Temperature: 85°C±5°C Time:250±12Hours	MIL-STD-202 F-108A B
9	Thermal Shock	Temperature 1: -55°C±5°C Temperature 2: 125°C±5°C Temperature change between T1 and T2: 5 seconds 10 cycles, maintain T1 and T2 for 30 minutes each in one cycle	MIL-STD-883E-1011.9B
10	Vibration	Frequency Range: 10Hz~2000Hz Amplitude:1.5mm or 20G 4Hours in each direction, total 12Hours	MIL-STD-202F

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [Hosonic](#) manufacturer:

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [E1SAA18-25.000M TR](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#)