

• E5FA Series 5.0*3.2 Glass Sealing Crystal



FEATURES


- compact and thin (5.0*3.2*1.4mm max.)
- Suitable for various applications
- Primary solution for DIP type crystal design looking to consider a switch to SMD type
- ROHS compliant

Electrical Specifications

Item	Type	E5FA				
		8 to 9.999MHz	10 to 11.999MHz	12 to 23.999MHz	24 to 54.000MHz	48 to 80.000MHz
Frequency Range	F0	8 to 9.999MHz	10 to 11.999MHz	12 to 23.999MHz	24 to 54.000MHz	48 to 80.000MHz
Mode of Vibration		Fundamental				3 rd Overtone
Load Capacitance	CL	10pF to Series				
Frequency Tolerance	$\Delta F/F_0$	$\pm 10\text{ppm}, \pm 30\text{ppm}, \pm 50\text{ppm}$ (At 25°C)				
Equivalent Series Resistance	ESR	120 Ω max.	80 Ω max.	50 Ω max.	30 Ω max.	70 Ω max.
Temperature Stability	TC	$\pm 10\text{ppm}, \pm 30\text{ppm}, \pm 50\text{ppm}$ (Refer to 25°C)				
Operating Temperature Range	T _{OPR}	-20~+70°C, -30~+85°C Option				
Storage Temperature Range	T _{STG}	-55~+125°C				
Shunt Capacitance	C0	7pF max.				
Insulator Resistance	IR	500M Ω min. (At 100V _{DC})				
Drive Level	DL	100 μ W(300 μ W max.)				
Aging	Fa	$\pm 5\text{ppm}$ max. (At 25°C, First year)				
Packing Unit		1000pcs/reel				

**Please contact us for inquiries regarding other Specifications

Mechanical Dimensions(mm)

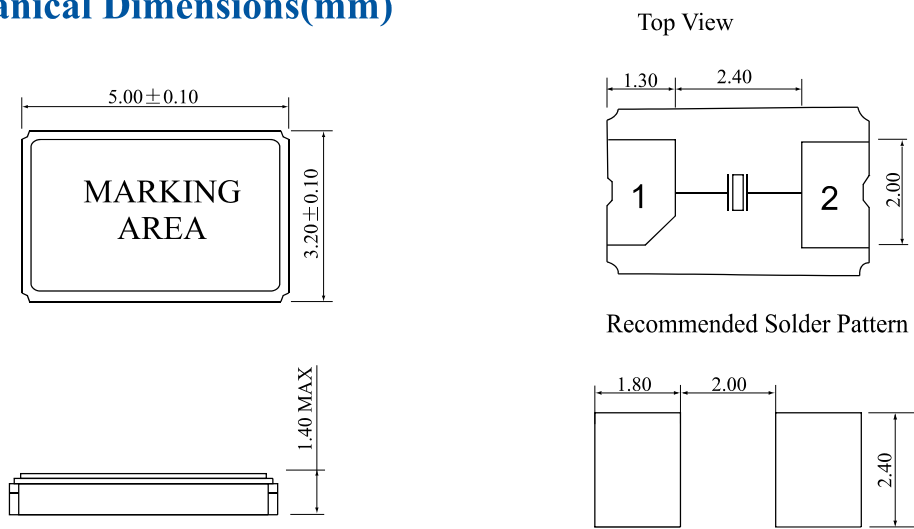

TAIWAN:

HOSONIC ELECTRONIC CO., LTD.
23-1 LANE 84. CHUN YING ST. SHULIN CHEN.
TAIPEI 23804. TAIWAN
WEB SITE:<http://www.hosonic.com>

☎ : 886-2-86875200
☎ : 886-2-26816456
✉ : hosonic.sales@hosonic.com

CHINA:

HANGZHOU HOSONIC ELECTRONIC CO., LTD.
NO.242 LIANGBO ROAD. LIANGZHU TOWN.
YUHANG DISTRICT, HANGZHOU, ZHEJIANG, CHINA
WEB SITE:<http://www.hosonic.com>

☎ : 86-571-88778189
☎ : 86-571-88778857
✉ : hosonic.sales@hosonic.com

Specifications are subject to change without notice

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [Hosonic](#) manufacturer:

Other Similar products are found below :

[CX3225GB25000M0PPSZ1](#) [718-13.2-1](#) [MC405 32.0000K-R3:PURE SN](#) [7A-40.000MAAE-T](#) [FL2000085](#) [99-BU](#) [9B-15.360MBBK-B](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [ABC2-6.000MHZ-D4Z-T](#) [ABLS-20.000MHZ-D2-T](#) [ABS071-32.768KHZ-6-T](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [ABL-27.000MHZ-B4Y-T](#) [ABM11-132-24.000MHZ-T3](#) [ABM3B1-25.000MHZ-D2Y-T](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7A-24.576MBBK-T](#) [7B-30.000MBBK-T](#) [7A-14.31818MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [ABLS-12.000MHZ-B2Y-T](#) [ABLS-10.000MHZ-D3W-T](#) [7A-10.000MBBK-T](#) [SG636PCE-20.000MC](#) [3404](#) [E1SAA18-25.000M TR](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [FL5000014](#) [EUCA18-3.1872M](#) [FX0800015](#) [425F35E027M0000](#)