

FAST SWITCHING DIODES

1N4148WS

FEATURES

Fast Switching Speed Surface Mount Package Ideally Suited for Automatic Insertion For General Purpose Switching Applications High Conductance

MARKING: T4



MAXIMUM RATINGS (TA=25°C unless otherwise noted)


Parameter	Symbol	Value	Units	
Non-Repetitive Peak reverse voltage	V_{RM}	100	V	
Peak Repetitive Peak reverse voltage	V _{RRM}	75	V	
Working Peak Reverse Voltage	V _{RWM}	75	V	
DC Blocking	V _R	75	V	
RMS Reverse Voltage	R(RMS)	53	V	
Forward Continuous Current	I _{FM}	300	mA	
Average Rectified Output Current	I ₀	150	mA	
Peak forward surge current @=1.0μs	I _{FSM}	2.0	A	
Peak forward surge current @=1.0s	I _{FSM}	1.0	A	
Power Dissipation	Pd	200	mW	
Thermal	R _{0JA}	650	°C/W	
Junction temperature	Tj	150	$^{\circ}$ C	
Storage temperature	T _{STG}	-65~+150	$^{\circ}$ C	

ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Min	Тур	Max	Unit	Conditions
Forward voltage	V _{F1}			0.715	V	I _F =1mA
Forward voltage	V _{F2}			0.855	V	I _F =10 mA
Forward voltage	V _{F3}			1.0	V	I _F =50 mA
Forward voltage	V_{F4}			1.25	V	$I_F = 150 \text{ mA}$
Reverse current	I _{R1}			1	μΑ	V _R =75 V
Reverse current	I _{R2}			25	nA	V _R =20 V
Capacitance between terminals	Ст			2	pF	V _R =0V,f=1MHz
Reverse Recovery Time	t _{rr}			4	ns	$I_F=I_R=10$ mA $Irr=0.1$ X I_R , $R_L=100$ Ω



1N4148WS Typical Characteristics

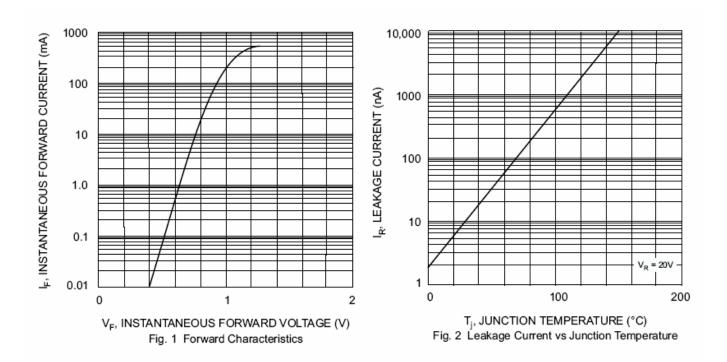

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Hottech manufacturer:

Other Similar products are found below:

MMBD3004S-13-F RD0306T-H DSE010-TR-E BAV17-TR BAV19-TR 1N3611 NTE156A NTE574 NTE6244 1SS181-TP 1SS193,LF 1SS400CST2RA SDAA13 SHN2D02FUTW1T1G LS4151GS08 FC903-TR-E 1N4449 1N456A 1N4934-E3/73 1N914B 1N914BTR 1SS226-TP RFUH20TB3S D291S45T BAV300-TR BAW56DWQ-7-F BAW75-TAP MM230L-CAA IDW40E65D1 JAN1N3600 LL4151-GS18 053684A SMMSD4148T3G 707803H NSVDAN222T1G CDSZC01100-HF LL4150-M-08 BAV199E6433HTMA1 BAS28-7 BAW56HDW-13 BAS28 TR VS-HFA04SD60STR-M3 NSVM1MA152WKT1G RGP30D-E3/73 BAV99TQ-13-F BAS21DWA-7 NTE6250 NTE582-4 NTE582-6 MMDB30-E28X