

FAST SWITCHING DIODES

FEATURES

Fast Switching Speed Surface Mount Package Ideally Suited for Automatic Insertion For General Purpose Switching Applications High Conductance

MARKING: T4

MAXIMUM RATINGS (TA=25 °C unless otherwise noted)


Parameter	Symbol	Value	Units
Non-Repetitive Peak reverse voltage	V _{RM}	100	V
Peak Repetitive Peak reverse voltage	V _{RRM}	75	V
Working Peak Reverse Voltage	V _{RWM}	75	V
DC Blocking	V _R	75	V
RMS Reverse Voltage	R(RMS)	53	V
Forward Continuous Current	I _{FM}	300	mA
Average Rectified Output Current	lo	150	mA
Peak forward surge current @=1.0µs	I _{FSM}	2.0	А
Peak forward surge current @=1.0s	I _{FSM}	1.0	А
Power Dissipation	Pd	500	mW
Thermal	R _{θJA}	250	°C/ W
Junction temperature	Tj	150	°C
Storage temperature	T _{STG}	-65~+150	C

ELECTRICAL CHARACTERISTICS (Tamb=25 $^\circ \! C$ unless otherwise specified)


Parameter	Symbol	Min	Тур	Max	Unit	Conditions
Forward voltage	V _{F1}			0.715	v	I _F =1mA
Forward voltage	V _{F2}			0.855	V	I _F =10 mA
Forward voltage	V _{F3}			1.0	V	I _F =50 mA
Forward voltage	V _{F4}			1.25	v	I _F =150 mA
Reverse current	I _{R1}			1	μΑ	V _R =75 V
Reverse current	I _{R2}			25	nA	V _R =20 V
Capacitance between terminals	Ст			2	pF	V _R =0V,f=1MHz
Reverse Recovery Time	t _{rr}			4	ns	$I_F=I_R=10$ mA Irr=0.1XI _R ,R _L =100 Ω




1N4148W







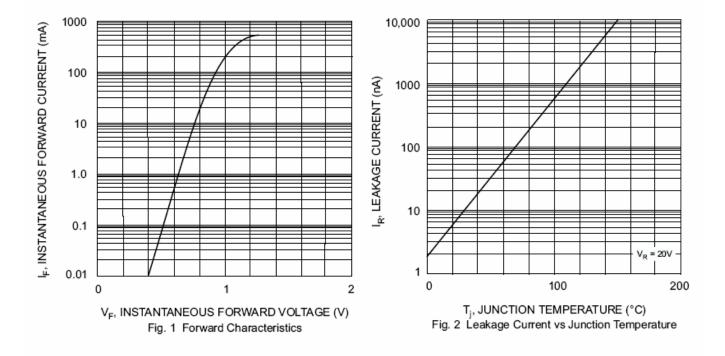

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Hottech manufacturer:

Other Similar products are found below :

MMBD3004S-13-F RD0306T-H DSE010-TR-E BAV17-TR BAV19-TR 1N3611 NTE156A NTE574 NTE6244 1SS181-TP 1SS193,LF 1SS400CST2RA SDAA13 SHN2D02FUTW1T1G LS4151GS08 1N4449 1N456A 1N4934-E3/73 1N914B 1N914BTR 1SS226-TP RFUH20TB3S D291S45T BAV300-TR BAW56DWQ-7-F BAW75-TAP MM230L-CAA IDW40E65D1 JAN1N3600 LL4151-GS18 053684A SMMSD4148T3G 707803H NSVDAN222T1G CDSZC01100-HF LL4150-M-08 BAV199E6433HTMA1 BAS28-7 BAW56HDW-13 BAS28 TR VS-HFA04SD60STR-M3 NSVM1MA152WKT1G RGP30D-E3/73 BAV99TQ-13-F BAS21DWA-7 NTE6250 NTE582-4 NTE582-6 MMDB30-E28X VS-HFA04SD60SL-M3