



N-CHANNEL Power MOSFET
FEATURES

- V_{DS} :100VMax., I_D : 15A Max.
- $R_{DS(ON)}$:100m Ω (max.)@ $V_{GS}=10V, I_D=10A$
- $R_{DS(ON)}$:110m Ω (max.)@ $V_{GS}=4.5V, I_D=10A$
- High density cell design for ultra low on-resistance
- Fully characterized avalanche voltage and current


TO-252

EQUIVALENT CIRCUIT
MECHANICAL DATA

- Case: TO-252
- Case material: Molded Plastic. UL flammability 94V-0
- Weight:0.33grams(approximate)
- Marking:D15N10

MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-source voltage	V_{DS}	100	V
Gate-source voltage	V_{GS}	± 20	V
Continuous drain current, $V_{GS}=10V$	I_D	15	A
Pulsed drain current (Note 1)	I_{DM}	60	A
Power dissipation	P_D	34	W
Thermal resistance from junction to ambient	$R_{\theta JA}$	100	$^\circ\text{C/W}$
Operating junction and storage temperature	T_J, T_{STG}	-55~+150	$^\circ\text{C}$
Single Pulsed Avalanche Energy (note 1)	E_{AS}	10	mJ
Lead Temperature for Soldering Purposes (1/8" from case for 10s)	T_L	260	$^\circ\text{C}$

Note: 1. E_{AS} condition: $V_{DD}=20V, L=0.5mH, R_G=25\Omega$, Starting $T_J = 25^\circ\text{C}$

N-CHANNEL Power MOSFET
ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Off characteristics						
Drain-Source breakdown voltage	$V_{(BR)DS}$	100			V	$V_{GS}=0V, I_D=250\mu A$
Zero gate voltage drain current	I_{DSS}			1	μA	$V_{DS}=100V, V_{GS}=0V$
Gate-body leakage current	I_{GSS}			± 100	nA	$V_{DS}=0V, V_{GS}=\pm 20V$
On characteristics (note1)						
Gate-threshold voltage	$V_{GS(th)}$	1	1.8	2.5	V	$V_{DS}=V_{GS}, I_D=250\mu A$
Drain-source on-resistance	$R_{DS(on)}$		80	100	m Ω	$V_{GS}=10V, I_D=10A$
			90	110		$V_{GS}=4.5V, I_D=10A$
Forward transconductance	g_{FS}		10		S	$V_{DS}=5V, I_D=10A$
Dynamic characteristics (Guaranteed by design, not subject to production)						
Input capacitance	C_{iss}		800		pF	$V_{GS}=0V$ $V_{DS}=50V$ $f=1.0MHz$
Output capacitance	C_{oss}		40		pF	
Reverse transfer capacitance	C_{rss}		35		pF	
Switching characteristics (Guaranteed by design, not subject to production)						
Turn-on delay time	$t_{d(on)}$		5		ns	$V_{DD}=50V$ $I_D=10A$ $R_G=3\Omega$ $V_{GS}=10V$
Turn-on rise time	t_r		40		ns	
Turn-off delay time	$t_{d(off)}$		20		ns	
Turn-off fall time	t_f		8		ns	
Total gate charge	Q_g		16		nC	$V_{DS}=50V, V_{GS}=10V,$ $I_D=10A$
Gate-source charge	Q_{gs}		3		nC	
Gate-drain charge	Q_{gd}		3.2		nC	
Drain-source diode characteristics						
Diode forward voltage	V_{SD}		0.8	1.2	V	$I_S=15A, V_{GS}=0V$
Max. forward current	I_S			15	A	
Pulsed drain-source diode forward current	I_{SM}			60	A	

 Notes: 1. Pulse Test: Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.

N-CHANNEL Power MOSFET

TYPICAL CHARACTERISTICS

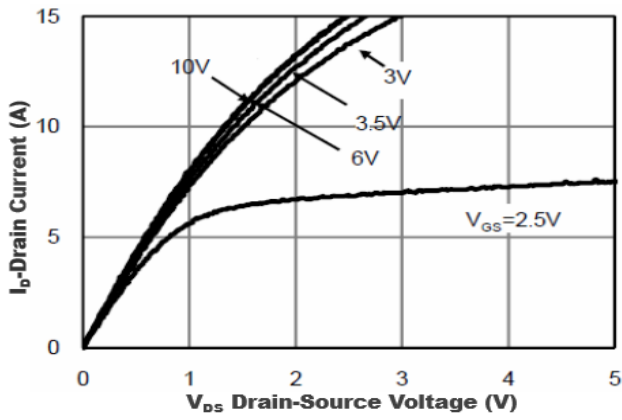


Figure1. Output Characteristics

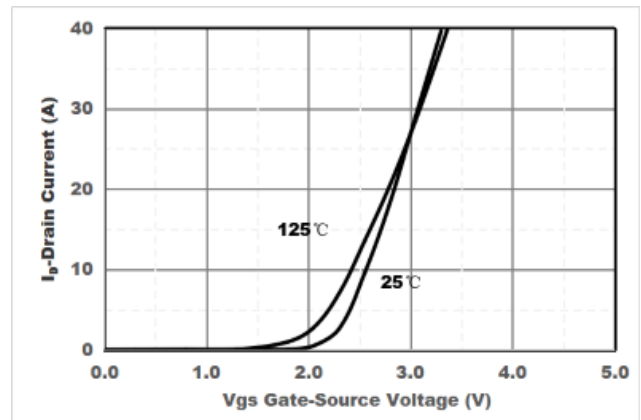


Figure2. Transfer Characteristics

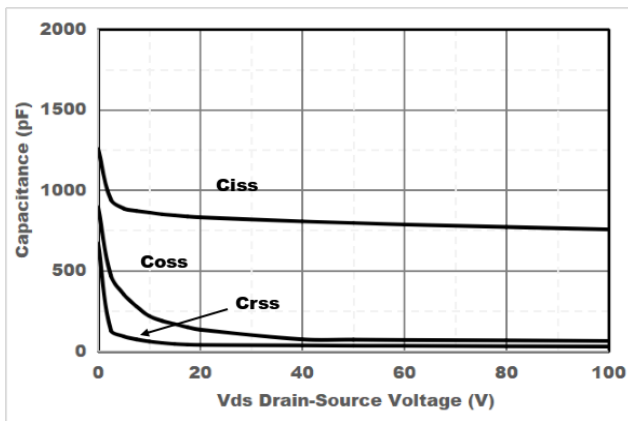


Figure3. Capacitance Characteristics

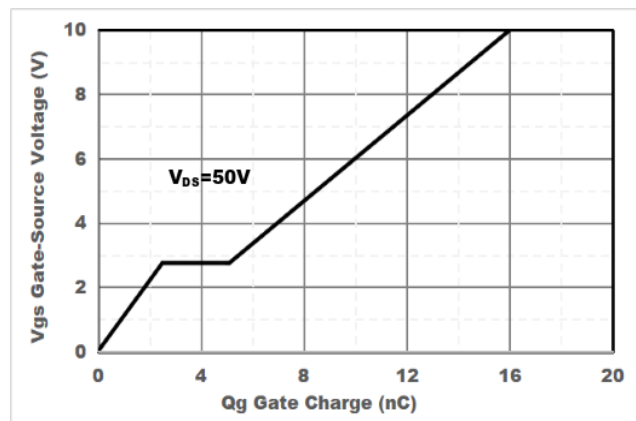


Figure4. Gate Charge

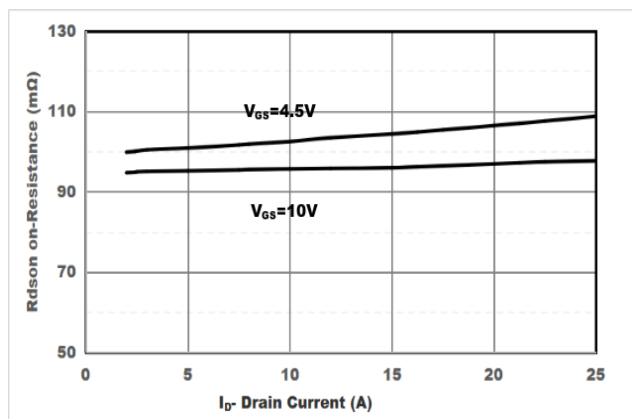


Figure5. Drain-Source on Resistance

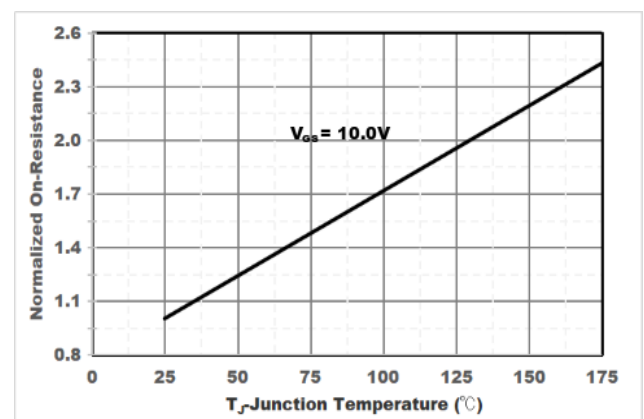
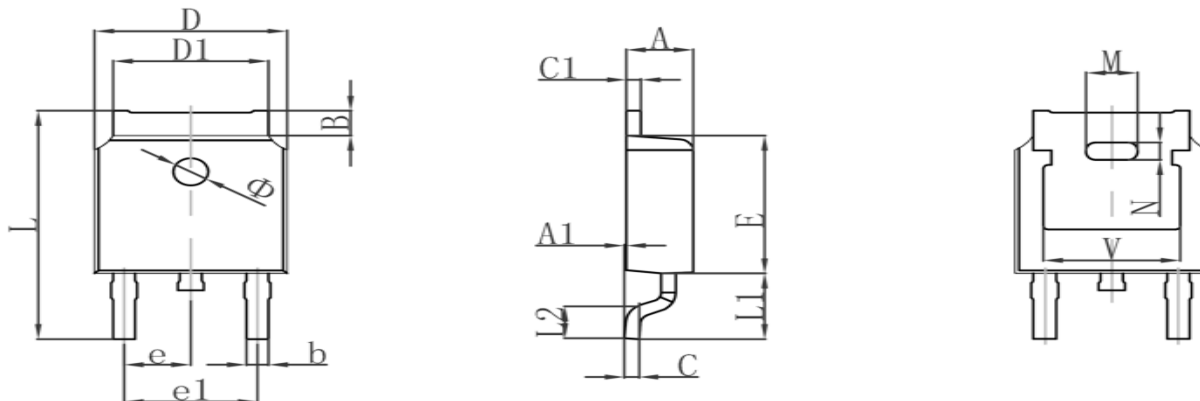
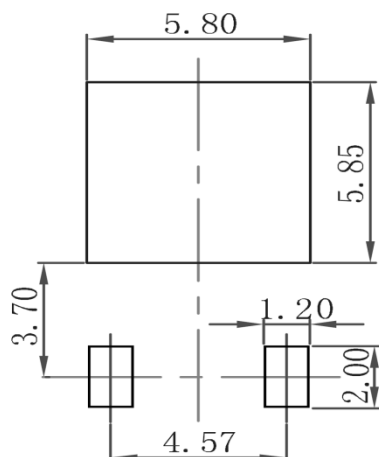


Figure6. Drain-Source on Resistance

N-CHANNEL Power MOSFET
TO-252 PACKAGE OUTLINE DIMENSIONS


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.380	0.087	0.094
A1	0.000	0.100	0.000	0.004
B	0.800	1.400	0.031	0.055
b	0.710	0.810	0.028	0.032
c	0.460	0.560	0.018	0.022
c1	0.460	0.560	0.018	0.022
D	6.500	6.700	0.256	0.264
D1	5.130	5.460	0.202	0.215
E	6.000	6.200	0.236	0.244
e	2.286TYP		0.090TYP	
e1	4.327	4.727	0.170	0.186
M	1.778REF		0.070REF	
N	0.762REF		0.018REF	
L	9.800	10.400	0.386	0.409
L1	2.9REF		0.114REF	
L2	1.400	1.700	0.055	0.067
V	4.830REF		0.190REF	
Φ	1.100	1.300	0.043	0.051


TO-252 SUGGESTED PAD LAYOUT

Note:

1. Controlling dimension: in millimeters
2. General tolerance: $\pm 0.05\text{mm}$
3. The pad layout is for reference purposes only

N-CHANNEL Power MOSFET


TO-252 TAPE AND REEL

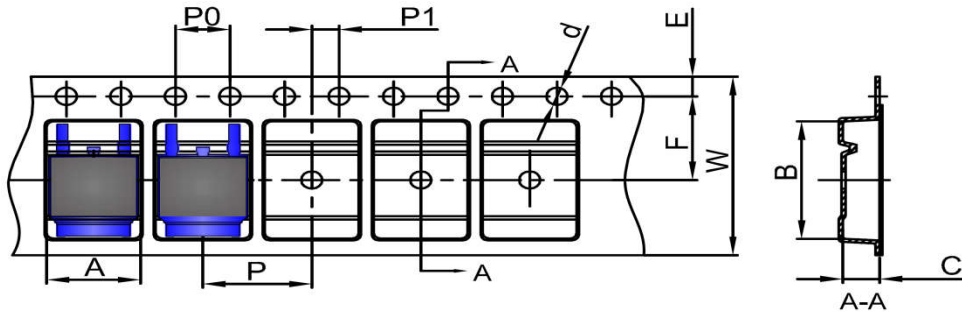TO-252 Embossed Carrier Tape




DIMENSIONS ARE IN MILLIMETER										
TYPE	A	B	C	d	E	F	P0	P	P1	W
TO-252	6.90	10.50	2.70	Ø1.55	1.75	7.50	4.00	8.00	2.00	16.00
TOLERANCE	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

TO-252 Tape Leader and Trailer

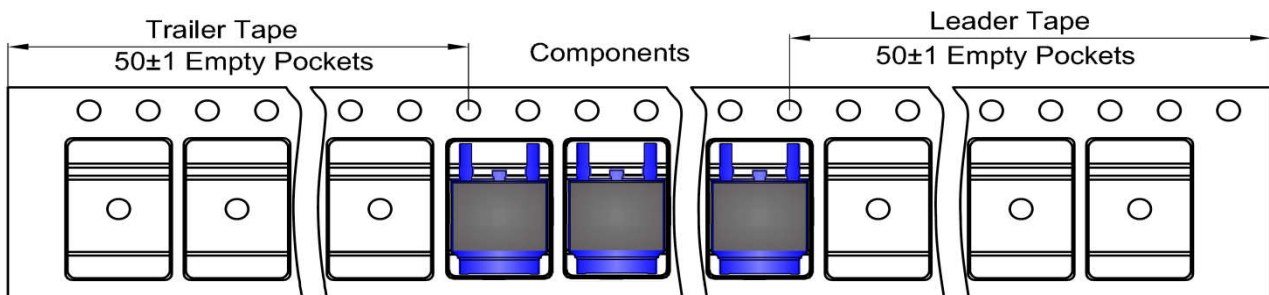

TO-252 REEL

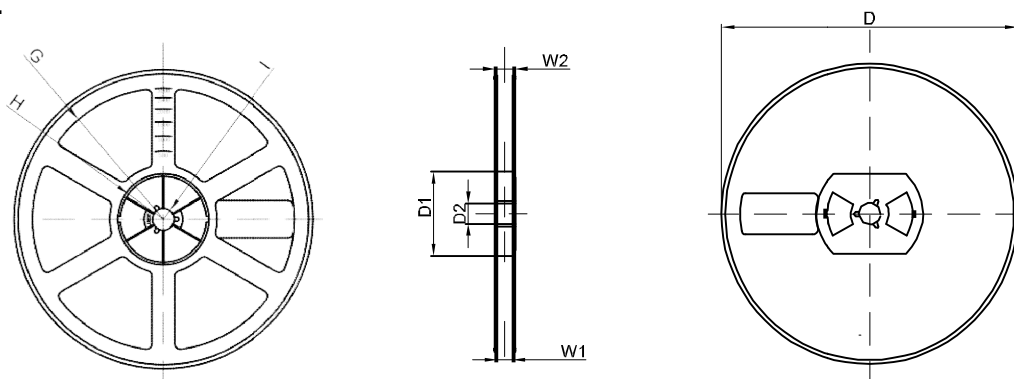

DIMENSIONS ARE IN MILLIMETER								
REEL OPTION	D	D1	D2	G	H	I	W1	W2
13" DIA	Ø330.00	100.00	Φ21.00	R151.00	R56.00	R6.50	16.40	21.00
TOLERANCE	±2	±1	±1	±1	±1	±1	±1	±1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [Hottech](#) manufacturer:

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#)
[US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#)
[IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1_T0_00201](#) [PJMF380N65E1_T0_00201](#)
[PJMF280N60E1_T0_00201](#) [PJMF600N65E1_T0_00201](#) [PJMF900N65E1_T0_00201](#) [PJMF900N60E1_T0_00201](#)