



**N-CHANNEL Power MOSFET**
**FEATURES**

- $V_{DS}$ : 60V Max.,  $I_D$ : 20A Max.
- $R_{DS(ON)}$ : 37m $\Omega$ (max.)@ $V_{GS}=10V, I_D=10A$
- $R_{DS(ON)}$ : 48m $\Omega$ (max.)@ $V_{GS}=5V, I_D= 5A$
- High density cell design for ultra low on-resistance
- Fully characterized avalanche voltage and current


**TO-252**

**EQUIVALENT CIRCUIT**
**MECHANICAL DATA**

- Case: TO-252
- Case material: Molded Plastic. UL flammability 94V-0
- Weight: 0.33grams(approximate)
- Marking: D20N06

**MAXIMUM RATINGS** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-source voltage	$V_{DS}$	60	V
Gate-source voltage	$V_{GS}$	$\pm 20$	V
Continuous drain current, $V_{GS}=10V$	$I_D$	20	A
Pulsed drain current (Note 1)	$I_{DM}$	60	A
Power dissipation	$P_D$	45	W
Thermal resistance from junction to ambient	$R_{\theta JA}$	100	$^\circ\text{C/W}$
Operating junction and storage temperature	$T_J, T_{STG}$	-55~+150	$^\circ\text{C}$
Single Pulsed Avalanche Energy (note 1)	$E_{AS}$	70	mJ
Lead Temperature for Soldering Purposes (1/8" from case for 10s)	$T_L$	260	$^\circ\text{C}$

Note: 1.  $E_{AS}$  condition:  $V_{DD}=20V, L=0.5mH, R_G=25\Omega$ , Starting  $T_J = 25^\circ\text{C}$

**N-CHANNEL Power MOSFET**
**ELECTRICAL CHARACTERISTICS** (TA=25°C unless otherwise noted)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
<b>Off characteristics</b>						
Drain-Source breakdown voltage	$V_{(BR)DS}$	60			V	$V_{GS}=0V, I_D=250\mu A$
Zero gate voltage drain current	$I_{DSS}$			1	$\mu A$	$V_{DS}=60V, V_{GS}=0V$
Gate-body leakage current	$I_{GSS}$			$\pm 100$	nA	$V_{DS}=0V, V_{GS}=\pm 20V$
<b>On characteristics (note1)</b>						
Gate-threshold voltage	$V_{GS(th)}$	1	1.6	2.5	V	$V_{DS}=V_{GS}, I_D=250\mu A$
Drain-source on-resistance	$R_{DS(on)}$		28	37	m $\Omega$	$V_{GS}=10V, I_D=10A$
			35	48		$V_{GS}=4.5V, I_D=5A$
Forward transconductance	$g_{FS}$		10		S	$V_{DS}=5V, I_D=20A$
<b>Dynamic characteristics</b> (Guaranteed by design, not subject to production)						
Input capacitance	$C_{iss}$		1500		pF	$V_{GS}=0V$ $V_{DS}=30V$ $f=1.0MHz$
Output capacitance	$C_{oss}$		75		pF	
Reverse transfer capacitance	$C_{rss}$		60		pF	
<b>Switching characteristics</b> (Guaranteed by design, not subject to production)						
Turn-on delay time	$t_{d(on)}$		8		ns	$V_{DD}=30V$ $I_D=20A$ $R_G=1.8\Omega$ $V_{GS}=10V$
Turn-on rise time	$t_r$		20		ns	
Turn-off delay time	$t_{d(off)}$		16		ns	
Turn-off fall time	$t_f$		22		ns	
Total gate charge	$Q_g$		28		nC	$V_{DS}=30V, V_{GS}=10V,$ $I_D=20A$
Gate-source charge	$Q_{gs}$		5		nC	
Gate-drain charge	$Q_{gd}$		6.5		nC	
<b>Drain-source diode characteristics</b>						
Diode forward voltage	$V_{SD}$			1.2	V	$I_S=15A, V_{GS}=0V$
Max. forward current	$I_S$			20	A	
Pulsed drain-source diode forward current	$I_{SM}$			60	A	

 Notes: 1. Pulse Test: Pulse Width $\leq 300\mu s$ , duty cycle  $\leq 2\%$ .

N-CHANNEL Power MOSFET

TYPICAL CHARACTERISTICS

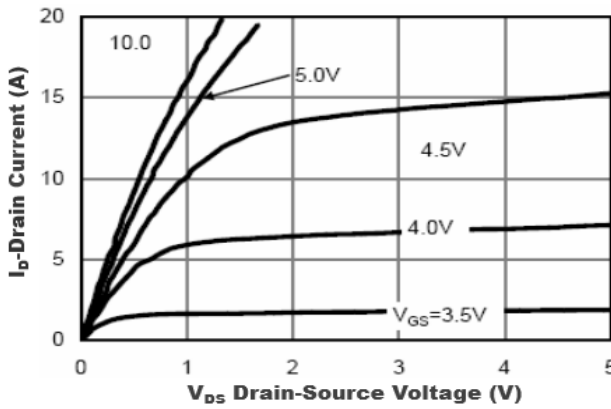


Figure1. Output Characteristics

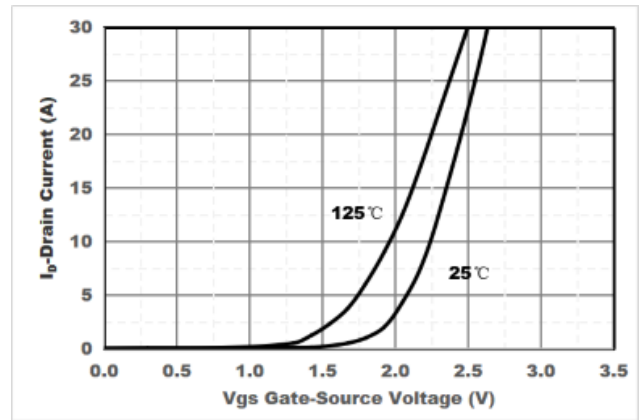


Figure2. Transfer Characteristics

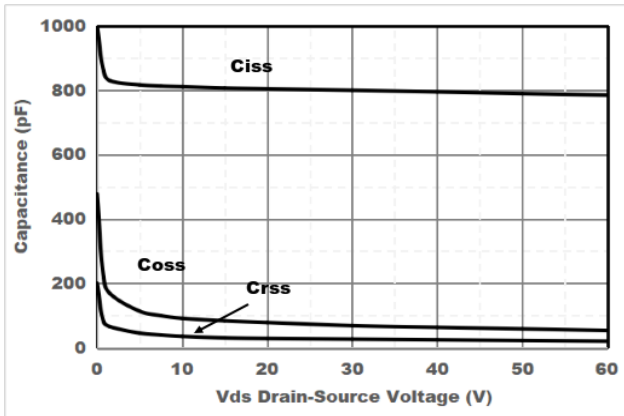


Figure3. Capacitance Characteristics

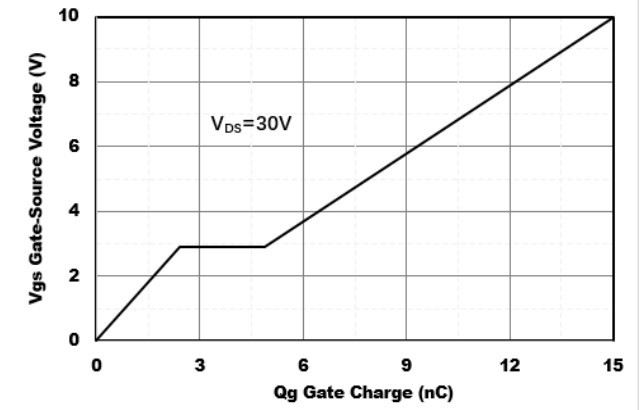


Figure4. Gate Charge

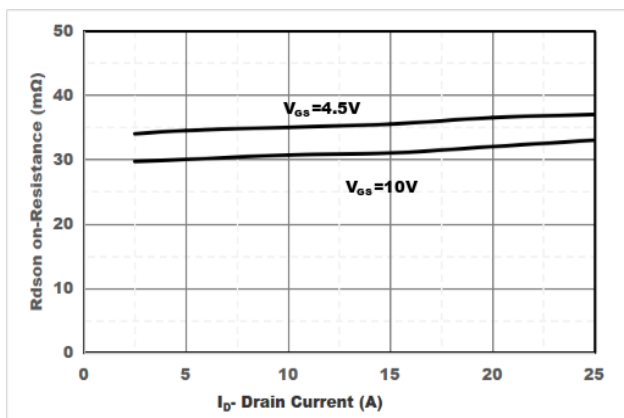


Figure5. Drain-Source on Resistance


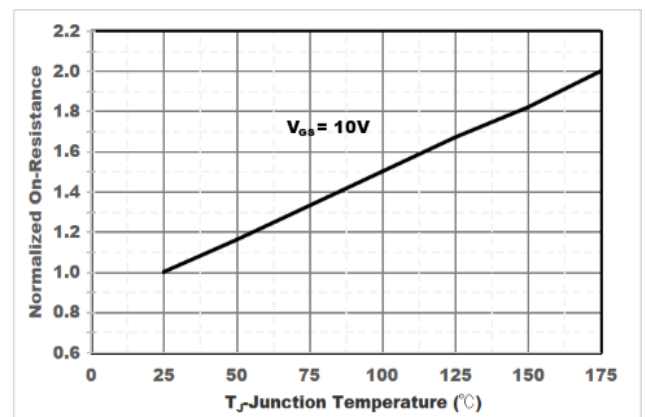


Figure6. Drain-Source on Resistance


N-CHANNEL Power MOSFET

**TO-252 PACKAGE OUTLINE DIMENSIONS**

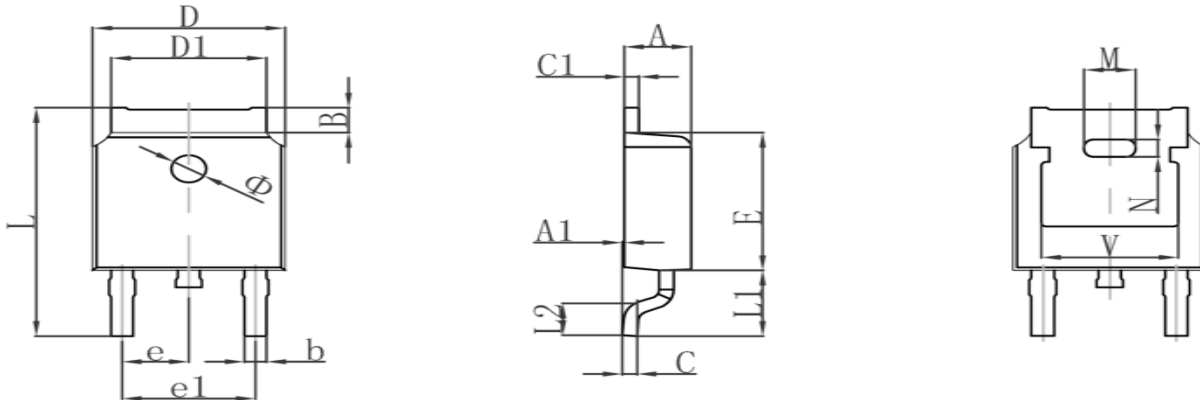

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.380	0.087	0.094
A1	0.000	0.100	0.000	0.004
B	0.800	1.400	0.031	0.055
b	0.710	0.810	0.028	0.032
c	0.460	0.560	0.018	0.022
c1	0.460	0.560	0.018	0.022
D	6.500	6.700	0.256	0.264
D1	5.130	5.460	0.202	0.215
E	6.000	6.200	0.236	0.244
e	2.286TYP		0.090TYP	
e1	4.327	4.727	0.170	0.186
M	1.778REF		0.070REF	
N	0.762REF		0.018REF	
L	9.800	10.400	0.386	0.409
L1	2.9REF		0.114REF	
L2	1.400	1.700	0.055	0.067
V	4.830REF		0.190REF	
Φ	1.100	1.300	0.043	0.051

**TO-252 SUGGESTED PAD LAYOUT**

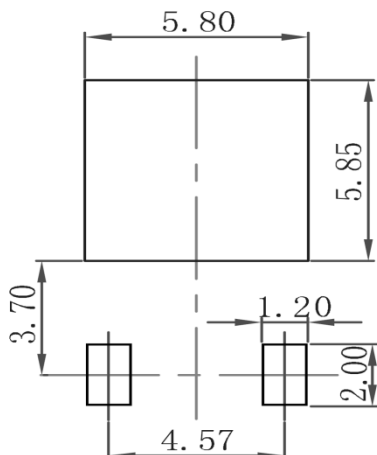


**Note:**

1. Controlling dimension: in millimeters
2. General tolerance:  $\pm 0.05\text{mm}$
3. The pad layout is for reference purposes only

N-CHANNEL Power MOSFET


**TO-252 TAPE AND REEL**

**TO-252 Embossed Carrier Tape**

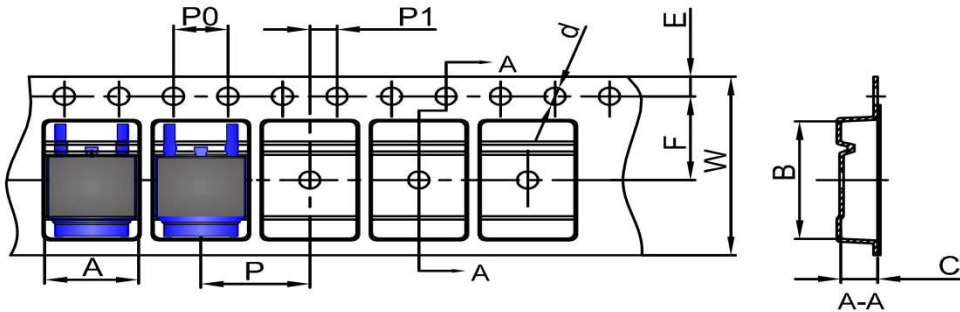


DIMENSIONS ARE IN MILLIMETER										
TYPE	A	B	C	d	E	F	P0	P	P1	W
TO-252	6.90	10.50	2.70	Ø1.55	1.75	7.50	4.00	8.00	2.00	16.00
TOLERANCE	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

**TO-252 Tape Leader and Trailer**

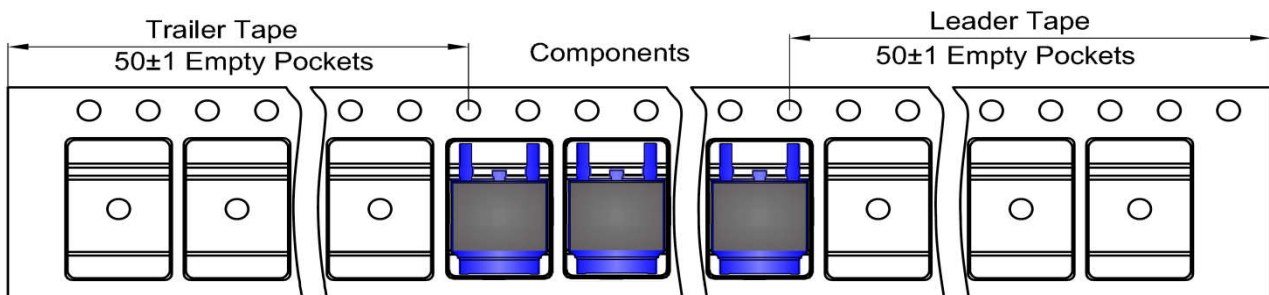

**TO-252 REEL**

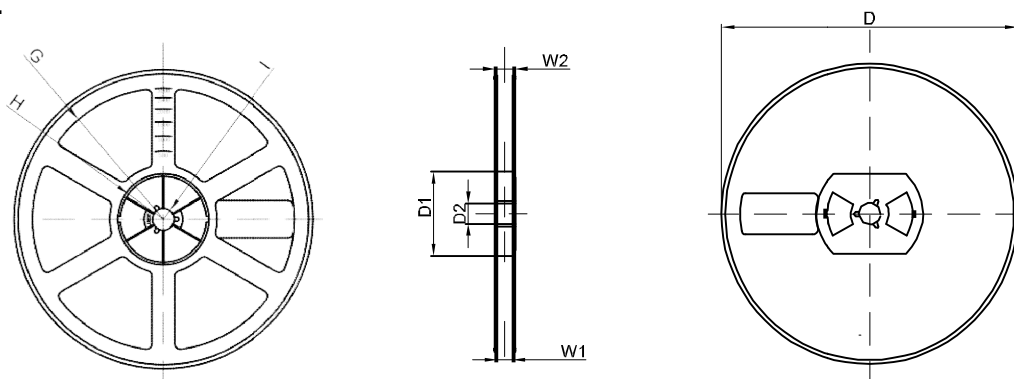

DIMENSIONS ARE IN MILLIMETER								
REEL OPTION	D	D1	D2	G	H	I	W1	W2
13" DIA	Ø330.00	100.00	Φ21.00	R151.00	R56.00	R6.50	16.40	21.00
TOLERANCE	±2	±1	±1	±1	±1	±1	±1	±1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [Hottech](#) manufacturer:*

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [TK100A10N1,S4X\(S](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)  
[IRS2092STRPBF-EL](#) [IPS70R2K0CEAKMA1](#) [TK31J60W5,S1VQ\(O](#) [TK31J60W,S1VQ\(O](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#)  
[DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [P85W28HP2F-7071](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#)  
[US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [IPS60R3K4CEAKMA1](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#)  
[IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [IPS60R360PFD7SAKMA1](#)  
[DMN2990UFB-7B](#) [SSM3K35CT,L3F](#) [IPLK60R1K0PFD7ATMA1](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [IPWS65R035CFD7AXKSA1](#)  
[MCQ7328-TP](#) [SSM3J143TU,LXHF](#) [DMN12M3UCA6-7](#) [PJMF280N65E1\\_T0\\_00201](#) [PJMF380N65E1\\_T0\\_00201](#)  
[PJMF280N60E1\\_T0\\_00201](#) [PJMF600N65E1\\_T0\\_00201](#) [PJMF900N65E1\\_T0\\_00201](#) [PJMF900N60E1\\_T0\\_00201](#)