


SCHOTTKY DIODES

FEATURES


Fast Switching Speed
 For General Purpose Switching Applications
 High Conductance

MMBD4148A/CA/CC/SE


MARKING




MMBD4148A:5H



MMBD4148CA:D6



MMBD4148CC:D5



MMBD4148SE:D4



MAXIMUM RATINGS (TA=25°C unless otherwise noted)

Paramet	Symbol	Limits	Unit
Non-Repetitive Peak reverse voltage	V _{RM}	100	V
Peak Repetitive Peak reverse voltage	V _{RRM}	100	V
Working Peak Reverse Voltage	V _{RWM}		
RMS Reverse Voltage	V _{R(RMS)}	53	V
Forward Continuous Current	I _{FM}	300	mA
Average Rectified Output Current	I _O	200	mA
Peak forward surge current @=1.0μs @=1.0	I	2.0	A
		1.0	
Power Dissipation	P _D	350	mW
Thermal Resistance Junction to Ambient	R _{JA}	357	°C/W
Junction temperature	T _j	150	°C
Storage temperature	T _{STG}	-65~+150	°C

Electrical Ratings @TA=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Reverse Breakdown Voltage	V _{(BR) R1}	100			V	I _R =100μA
	V _{(BR) R2}	75			V	I _R =5μA
Forward voltage	V _F			1	V	I _F =10mA
Reverse current	I _{R1}			5	μA	V _R =75V
	I _{R2}			25	nA	V _R =25V
Capacitance between terminals	C _T			4	pF	V _R =0V, f=1MHz
Reverse Recovery Time	t _{rr}			4	ns	I _F =I _R =10mA, V _R =6V, I _{rr} =0.1X I _R , R _L =100

MMBD4148A/CA/CC/SE Typical Characteristics

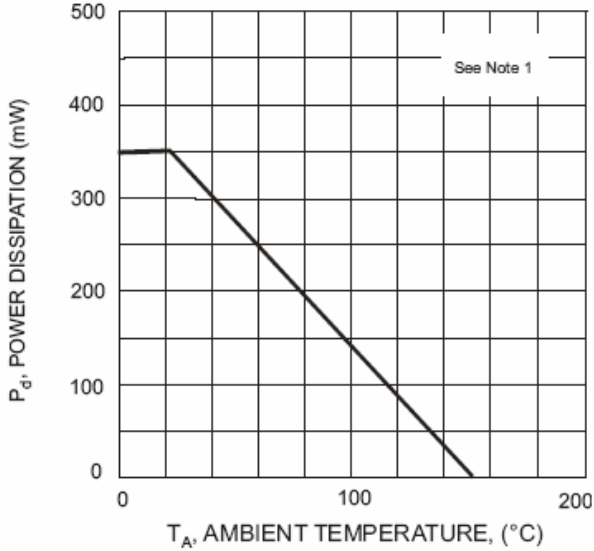


Fig. 1 Power Derating Curve

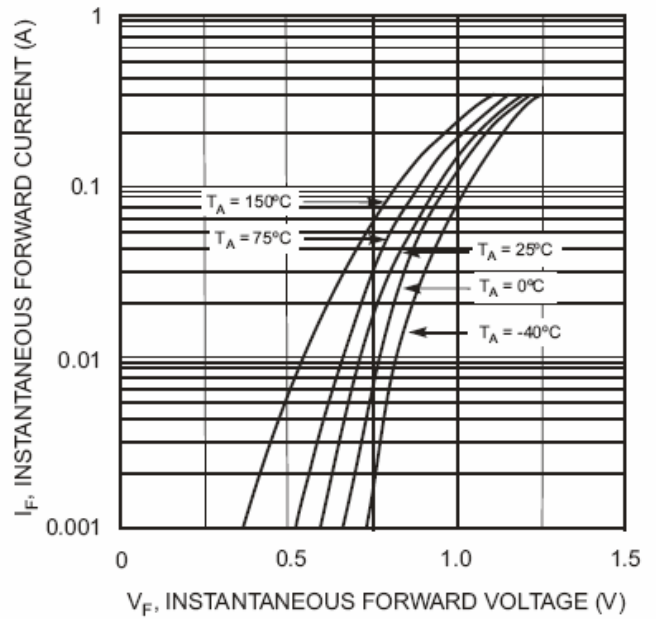


Fig. 2 Forward Characteristics

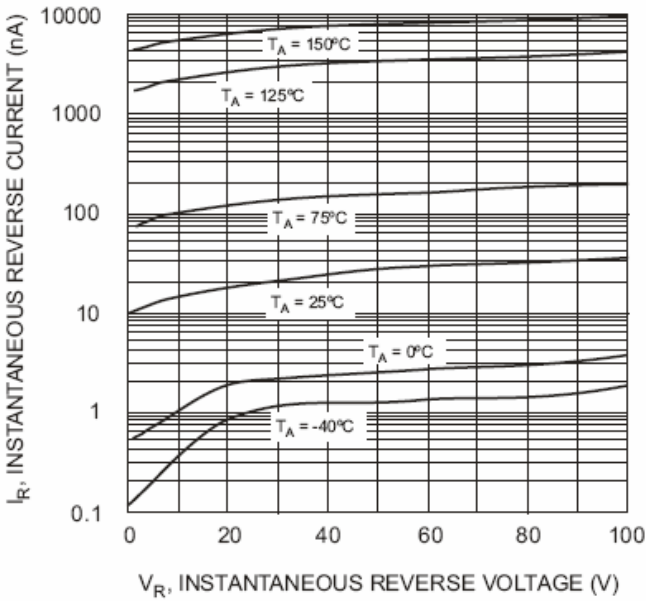


Fig. 3 Typical Reverse Characteristics

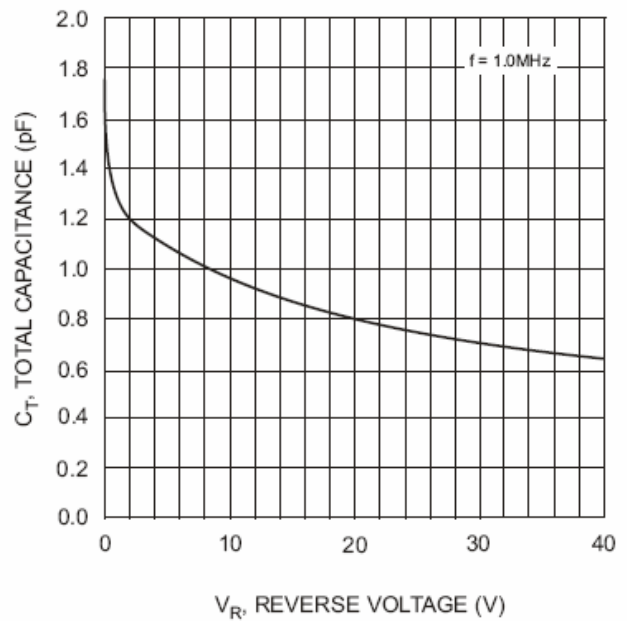


Fig. 4 Typical Capacitance vs. Reverse Voltage

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [Hottech manufacturer:](#)

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [DSE010-TR-E](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#)
[1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [FC903-TR-E](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#)
[1SS226-TP](#) [RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-](#)
[GS18](#) [053684A](#) [SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [BAV199E6433HTMA1](#) [BAS28-7](#)
[BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#) [NTE6250](#)
[NTE582-4](#) [NTE582-6](#) [MMDB30-E28X](#)