


#### **SCHOTTKY DIODES**


# FEATURES MMBD4148A/CA/CC/SE

Fast Switching Speed For General Purpose Switching Applications High Conductance


#### **MARKING**




MMBD4148A:5H



MMBD4148CA:D6







#### MAXIMUM RATINGS (TA=25°C unless otherwise noted)


Paramet	Symbol	Limits	Unit
Non-Repetitive Peak reverse voltage	$V_{RM}$	100	V
Peak Repetitive Peak reverse voltage Working Peak Reverse Voltage	$V_{RRM}$ $V_{RWM}$	100	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	53	V
Forward Continuous Current	$I_{FM}$	300	mA
Average Rectified Output Current	$I_{O}$	200	mA
Peak forward surge current @=1.0µs @=1.0	I	2.0 1.0	A
Power Dissipation	$P_D$	350	mW
Thermal Resistance Junction to Ambient	R JA	357	°C/W
Junction temperature	$T_{j}$	150	$^{\circ}$ C
Storage temperature	$T_{STG}$	-65~+150	$^{\circ}\! \mathbb{C}$

#### Electrical Ratings @TA=25°C

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Reverse Breakdown Voltage	V <sub>(BR) R1</sub>	100			V	$I_R=100\mu A$
	V <sub>(BR) R2</sub>	75			V	$I_R=5\mu A$
Forward voltage	$V_{\mathrm{F}}$			1	V	I <sub>F</sub> =10mA
Reverse current	$I_{R1}$			5	μΑ	V <sub>R</sub> =75V
	$I_{R2}$			25	nA	V <sub>R</sub> =25V
Capacitance between terminals	C <sub>T</sub>			4	pF	V <sub>R</sub> =0V,f=1MHz
Reverse Recovery Time	t <sub>rr</sub>			4		I <sub>F</sub> =I <sub>R</sub> =10mA, V <sub>R</sub> =6V,Irr=0.1XI <sub>R</sub> ,R <sub>L</sub> =100



### MMBD4148A/CA/CC/SE Typical Characteristics

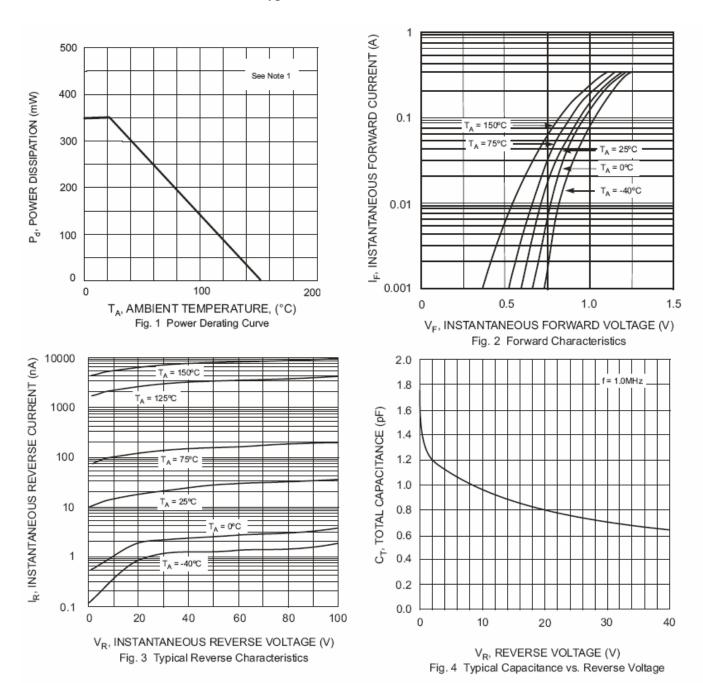

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Diodes - General Purpose, Power, Switching category:

Click to view products by Hottech manufacturer:

Other Similar products are found below:

MMBD3004S-13-F RD0306T-H DSE010-TR-E BAV17-TR BAV19-TR 1N3611 NTE156A NTE574 NTE6244 1SS181-TP 1SS193,LF 1SS400CST2RA SDAA13 SHN2D02FUTW1T1G LS4151GS08 FC903-TR-E 1N4449 1N456A 1N4934-E3/73 1N914B 1N914BTR 1SS226-TP RFUH20TB3S D291S45T BAV300-TR BAW56DWQ-7-F BAW75-TAP MM230L-CAA IDW40E65D1 JAN1N3600 LL4151-GS18 053684A SMMSD4148T3G 707803H NSVDAN222T1G CDSZC01100-HF LL4150-M-08 1N4454-TR BAV199E6433HTMA1 BAS28-7 BAW56HDW-13 BAS28 TR VS-HFA04SD60STR-M3 NSVM1MA152WKT1G RGP30D-E3/73 BAV99TQ-13-F BAS21DWA-7 NTE6250 NTE582-4 NTE582-6